



ANCHOR PRODUCTS®

Connections That Last

The U-Anchor 2600 is a lightweight rooftop attachment system designed with a galvanized steel plate, cover membrane, and sacrificial separation disk that protects the roofing surface from wear. Factory welded and secured with approved fasteners, the U-2600 creates a watertight, manufacturer-approved connection for mechanically attached or fully adhered single-ply membranes. It is engineered to provide reliable strength, fast installation, and long-term performance for rooftop equipment attachment.




U-ANCHOR®

U2600



Front



Back

Equipment Attachment

- The U-2600 is installed by fastening through the roofing assembly into the structural deck with approved fasteners.
- The cover membrane is factory welded to the plate, and a sacrificial separation disk prevents damage to the roof membrane.
- Installation shall be performed by certified installers in compliance with roofing manufacturer and Anchor Products' specifications.
- Fastener hardware must be selected and installed per manufacturer's requirements, ensuring penetration and holding standards.
- Seam welds must comply with roofing manufacturer requirements; seams must be probed to confirm weld integrity.
- Connection nut must be fastened to 20–25 lbf-ft using a calibrated torque wrench. Excess torque may damage the U-Anchor.
- Material compatibility: Bolt is stainless steel, plate is galvanized steel, and all attachments are tested as a system for compatibility.

Warranty

- 20 Year Guarantee on waterproofing or match of current roof warranty



U-Anchor Advantages

- Extremely strong; lightweight.
- Fast installation — installs in less than five minutes.
- Can be installed on surfaces from flat to vertical (parapet).
- Completely watertight when installed properly.



**ANCHOR
PRODUCTS®**
Connections That Last

Codes & Approvals



FM 4481 - Anchors
for roof mounted
equipment
FM Approval with
selected membranes



Product Specs

Tested in accordance with FM 4481
Section 4.1 over 1/2 Steel. Assembly-
specific results may vary. Please contact
Anchor Products® directly for additional
testing results and information.


- **Bolt**
3/8"-16 x 1-3/8" Bolt*
Material Type: 304 Stainless Steel
- **Plate**
Outer Diameter: 6.5"
Material Thickness: 0.047" (1.194mm)
Material Type: G90 Galvanized Steel
- **Patents**
Visit www.anchorp.com/resources/patents

Packaging Specs

- Sold individually OR full box quantity
- Individual Weight: Approx. 0.9 lbs
- Full Box Quantity: 10 units
- Box Weight: Approx. 10.6 lbs
- Box Dimensions: 17" x 17" x 5"
- Full Pallet Quantity: 60 boxes
- Pallet Dimensions: 40" x 48" x 42"



U2600 Double Membrane Anchor

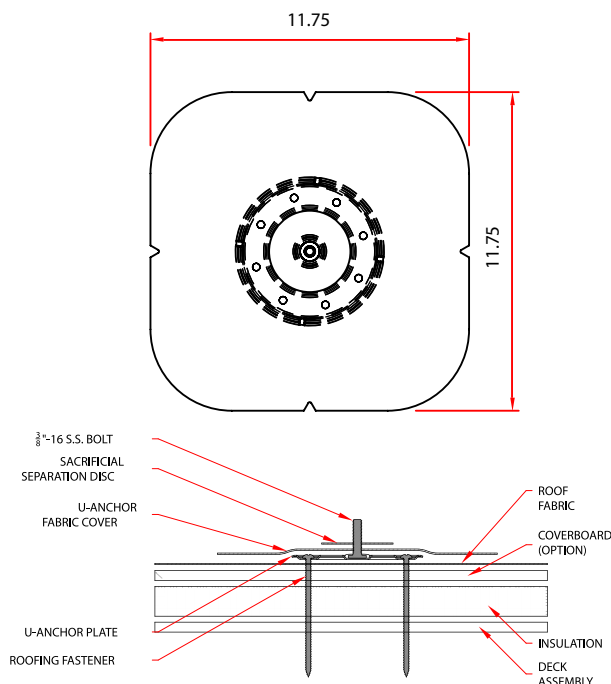

Membrane Options

APP	ELEVATE, GEN FLEX, JM, MULE, HIDE, CERTAINEED, DEBRIGUM, GAF, GARLAND, MALARKEY, POLYGLASS, SIPLAST, SOPREMA, TREMCO
SBS\TORCH	ELEVATE, GEN FLEX, JM, MULE, HIDE, CERTAINEED, DEBRIGUM, GAF, GARLAND, MALARKEY, POLYGLASS, SIPLAST, SOPREMA, TREMCO
BUR	ELEVATE, GEN FLEX, JM, MULE, HIDE, CERTAINEED, DEBRIGUM, GAF, GARLAND, MALARKEY, POLYGLASS, SIPLAST, SOPREMA, TREMCO

Hardware

ROOF TYPE	HARDWARE KIT
METAL DECK (24ga MIN)	(8) #14 or #15 ROOF FASTENERS
PLAYWOOD SHEETING (3/4" MIN)	(8) #14 ROOF FASTENERS
PARTICLE SHEETING (1" MIN)	(8) #14 ROOF FASTENERS
CONCRETE DECK (STD WEIGHT)	(6) #14 CONCRETE FASTENERS



Call Us Now!
888-575-2131

[For Warranty Information](#)

anchorp.com

* Specified option is standard. Custom options may be available for additional charge. Lead times may apply depending on roofing manufacturer and product availability.