

DATA SHEET

TRUCK MOUNTED BOOM PUMP



JXZZ42-5.20HP


42M Truck Mounted Boom Pump
with 200m³/h Output & Z-Fold Boom Design



■ TECHNICAL SPECIFICATION

General Specification		Pump Specification			Boom Specification	
Delivery Line	DN 125 / 5"	Output	Rod	-	Number of Booms	5 Sections
Radio Remote	Proportional Control		Piston	204 m ³ /h	Folding Type	Z & Roll
Wear Plate / Ring	Tungsten Carbide	Pressure	Rod	-	Vertical Height	41.7 m
Water Pump	20 Bar		Piston	87 Bar	Horizontal Reach	37.7 m
Water Tank	500 Liter	Delivery Cylinder (Hard-chromed)	Ø260 mm		Unfolding Height	8.0 m
Auto Lubrication	Hyd. greaser, Hopper	Stroke Length	2100 mm		End-Hose Length	4.0 m
		S-Valve	8" x 7"		1st Section	8.3 m
Weight 30t		Main Oil Pump	Rexroth 190Double		2nd Section	6.8 m
Max outrigger load 20t		System Pressure	350 Bar		3rd Section	7.2 m
		Switching Type	Hydraulic		4th Section	7.7 m
		Hopper Capacity	600 Liter		5th Section	7.7 m

■ BOOM WORKING DIAGRAM

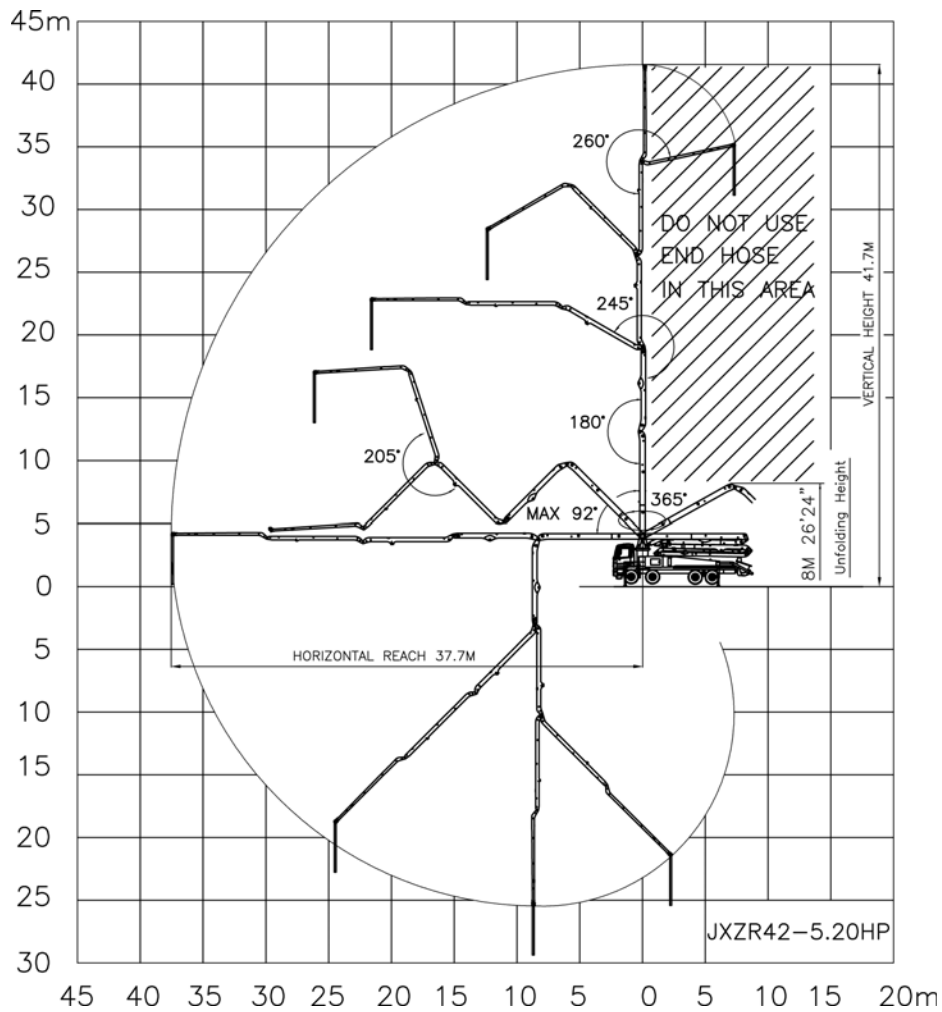

■ OUTRIGGER SPAN

