



BRAVO US MOBILE UNIT INFORMATION

Updated 06/01/2026



Flexible B-Unit

BRAVO: TECHNICAL SPECIFICATIONS

DIMENSIONS

- 13'6" HIGH X 102" WIDE X 53' LONG
- LIFT GATE

POWER REQUIREMENTS

- 1 200 AMP, 208 VOLT, 3 PHASE

SUPPORT EQUIPMENT

- GRASS VALLEY TRINIX ROUTER
- HD VIDEO - 94 INPUTS X 224 OUTPUTS
- 1 UTILITY FRAME SYNC/PROCESSORS
- 8 HD VIDEO OVER FIBER TRANSMITTERS
- MONITORS:
- 1 26" LCD MONITOR, 8 22" LCD MONITORS

MICROPHONES

- AVAILABLE UPON REQUEST

RECORD & PLAYBACK

- AVAILABLE UPON REQUEST


GRAPHICS

- AVAILABLE UPON REQUEST

CABLES


- 9MM SMPTE: 10 -25'
- LONGER SMPTE FIBER OR TRIAX ON REQUEST
- DT12 8 -500' 12 -250' 12 -100'
- 8 DT12 FANOUT SETS
- 4 DT12 BREAKOUT BOX(ES)
- ASSORTED SINGLE LINE XLR
- TAC-12 ST-ST 2 -1000' 5 -1500'
- TAC-4 ST-ST 2 -1000' 3 -1500'
- 5 PAIR HD COAX LOOM 5 -125'
- 10 PAIR HD COAX LOOM 1 -50'
- 5 PAIR SD COAX LOOM 1 -125'
- ASSORTED SINGLE LINE COAX
- 2 SETS OF 75' 2/0 CAMLOCK POWER CABLE

DENALI BRAVO FLOORPLAN

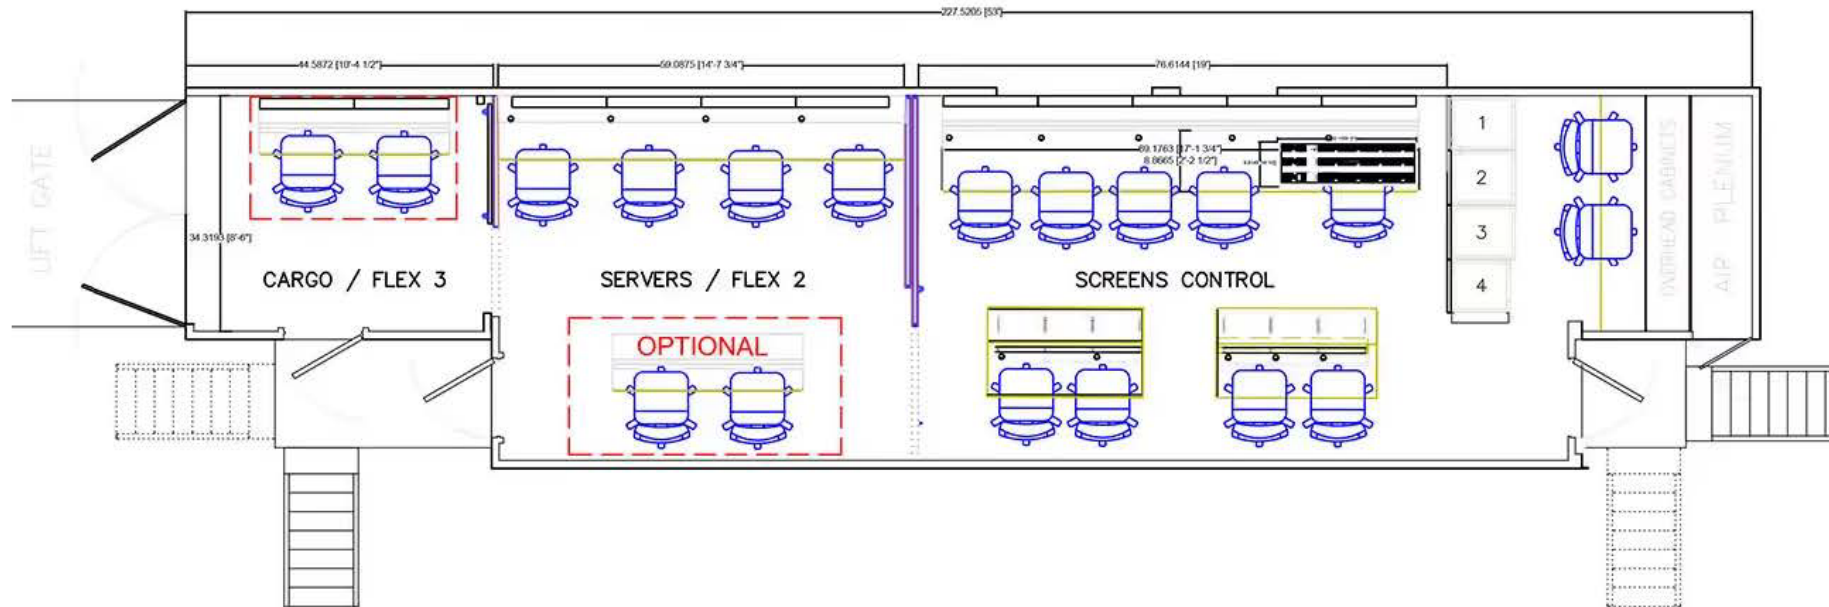

DENALI BRAVO

MONITOR WALL

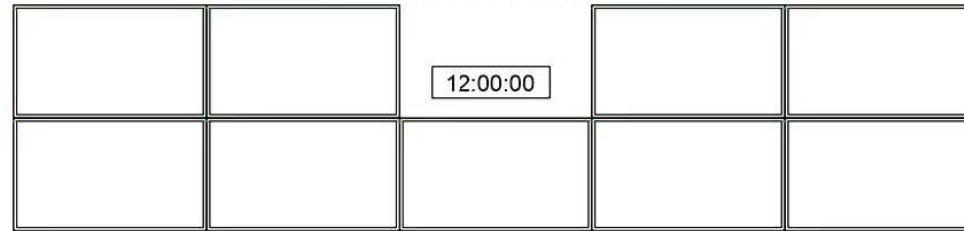

SCREENS CONTROL



FLEX 2



FLEX 3