



M-3 US MOBILE UNIT INFORMATION

Updated 06/02/2026



Single Trailer Unit Based in Hawaii

M-3: TECHNICAL SPECIFICATIONS

POWER REQUIREMENTS

- 208V SINGLE OR 3 PHASE, 200 AMPS, 150' CAMLOCK

PRODUCTION SWITCHER

- GVG KALYPSO SWITCHER, 4 M/E

CAMERAS

- 10 SONY HDC1500 CAMERAS
- 5 SLEDS
- 5 HEAVY PANHEAD W/STICKS
- 4 LIGHTWEIGHT STICKS

LENSES

- 5 HARD LENSES
- 2 HANDHELD LENSES
- 1 WIDE ANGLE LENS

RECORD & PLAYBACK

- 3 EVS XT3 6 CHANNEL LSM
- 1 EVS XT3 4 CHANNEL SPOTBOX
- 1 EVS X-FILE[3]
- 2 DVD RECORDER W/ REMOTE CONTROL

AUDIO

- DIGICO MODEL SD10B AUDIO CONSOLE

COMMUNICATIONS

- RTS ADAM INTERCOM SYSTEM - 80 PORTS


SUPPORT EQUIPMENT

- HARRIS ROUTER
- HD VIDEO - 224 INPUTS X 224 OUTPUTS(32 CHANNELS)
- 16 UTILITY FRAME SYNC/PROCESSORS
- BASIC TRUCK COMPLIMENT OF CABLE, MICS, ETC.




M-3

FLOORPLAN

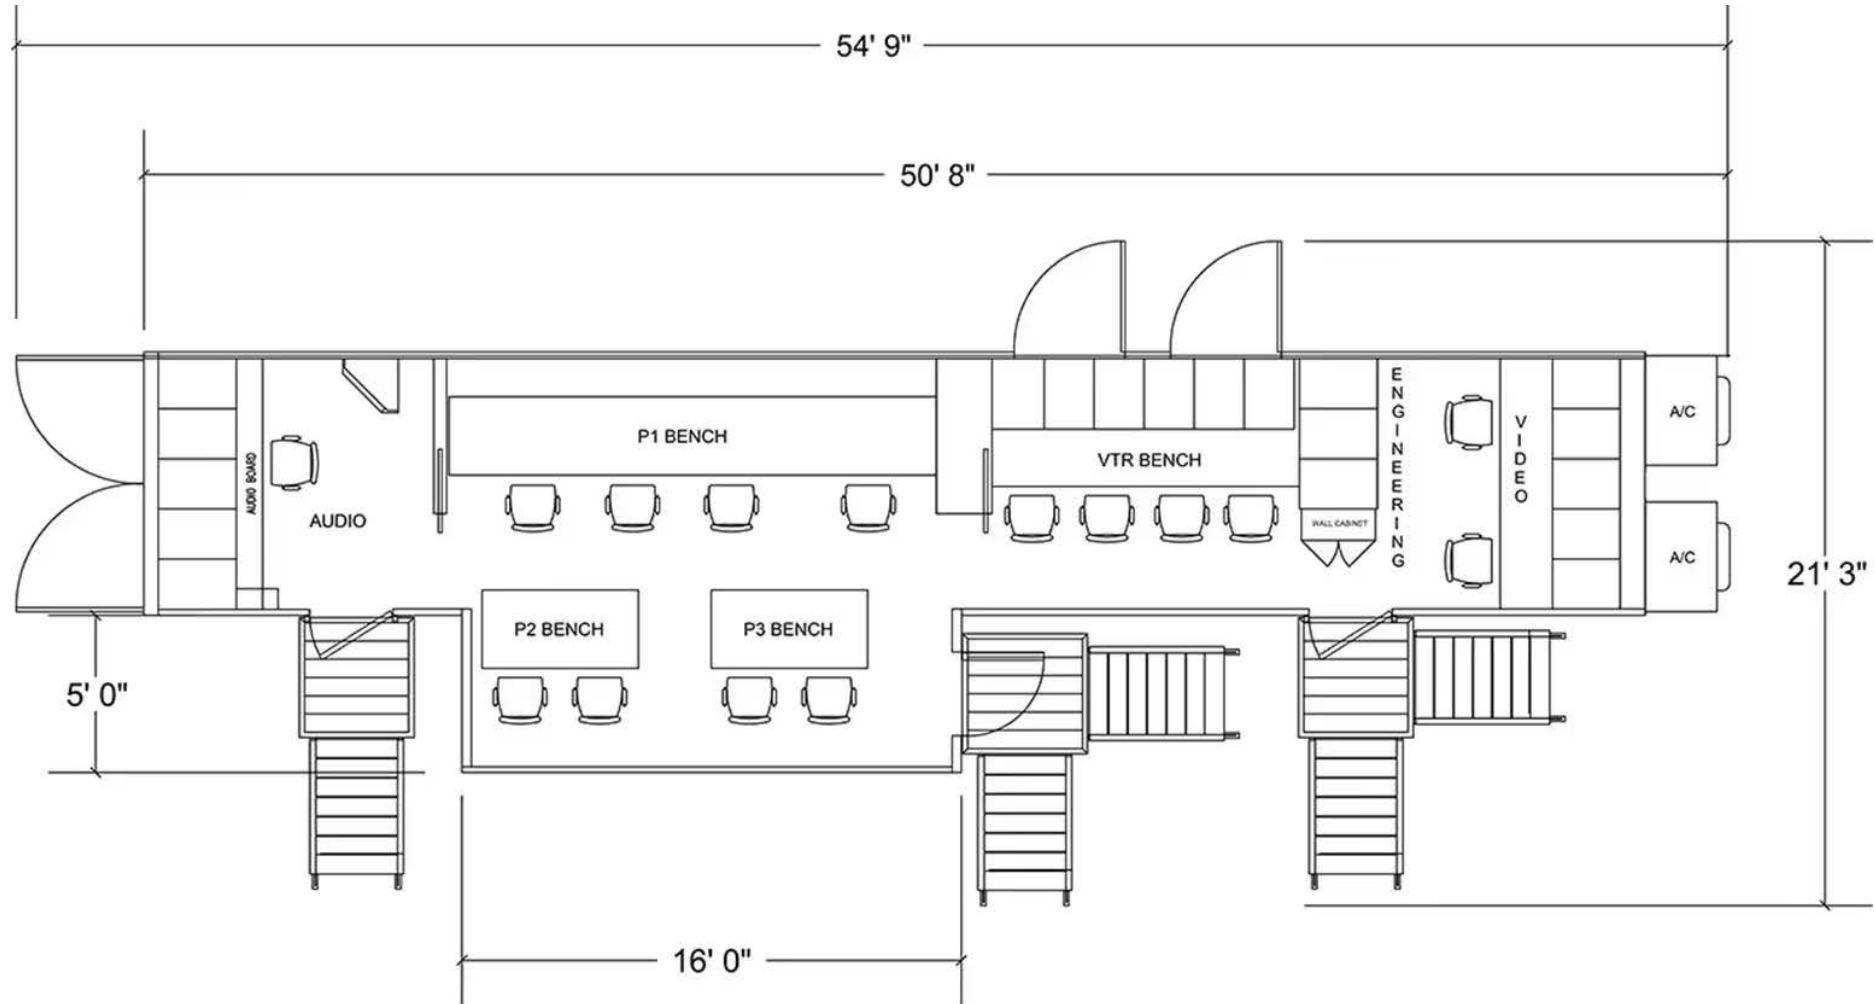

M-3

PRODUCTION MONITOR WALL

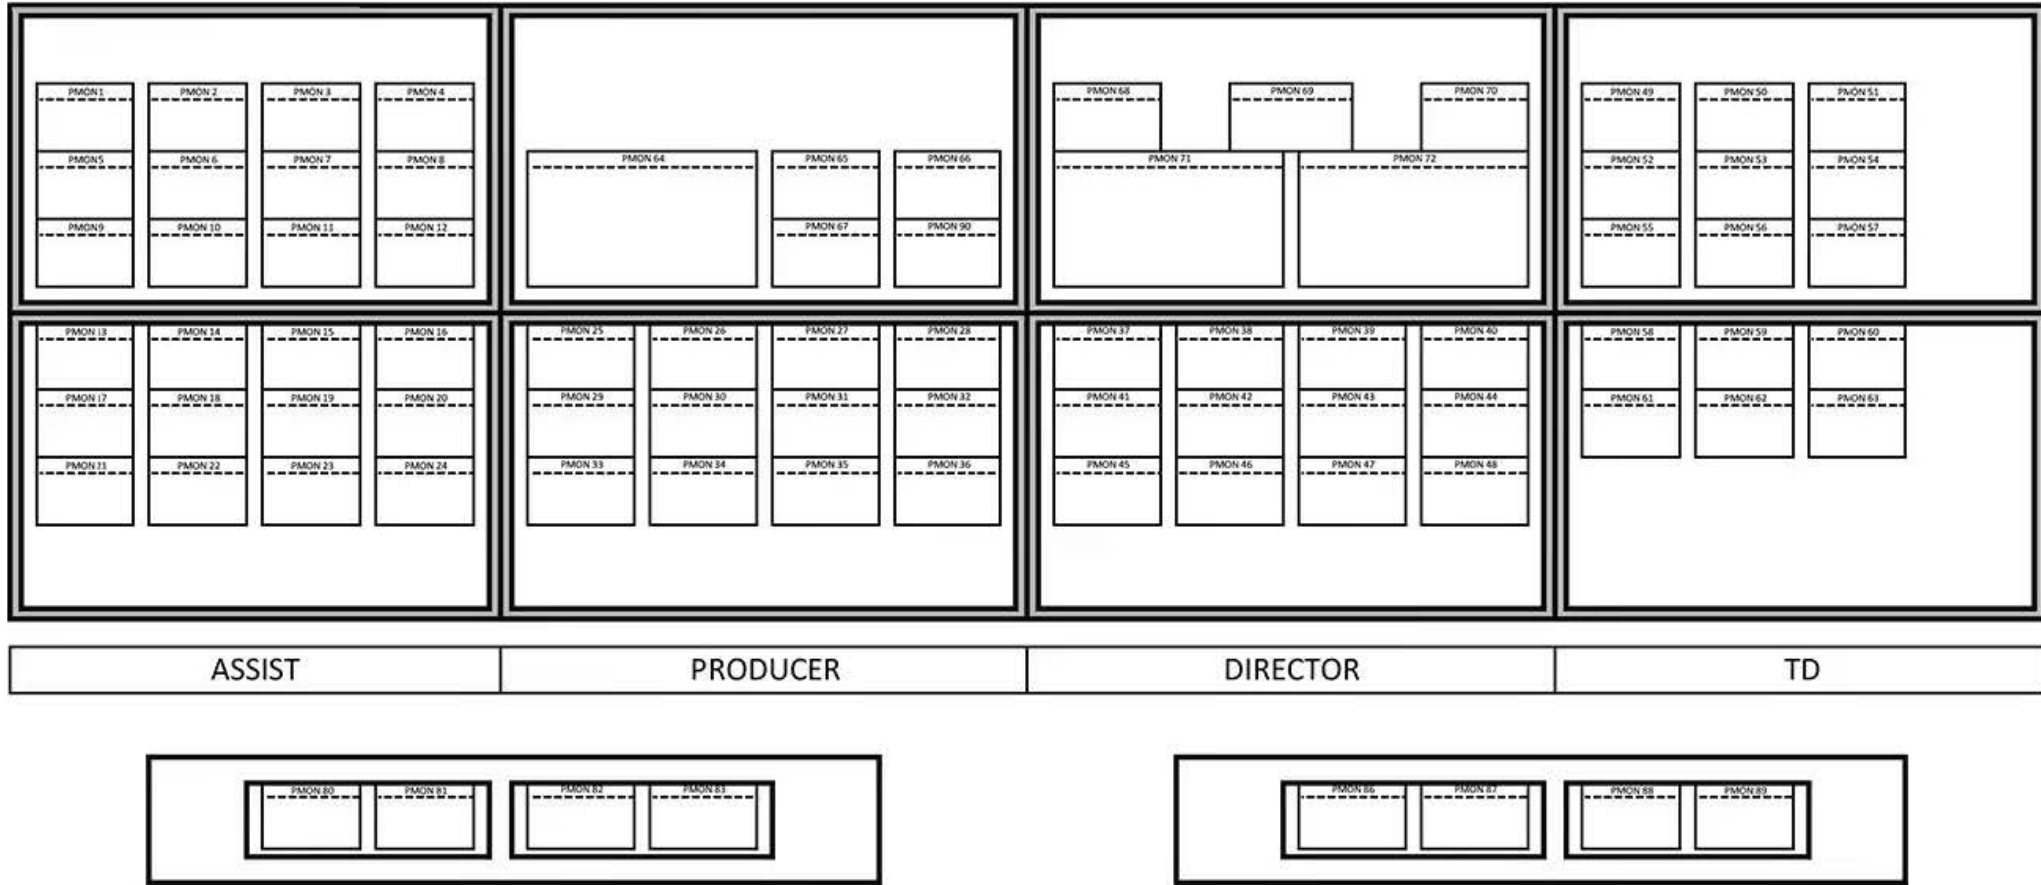

ASSIST

PRODUCER

DIRECTOR

TD

P-2 DESK

P-3 DESK

