



**ST32**  
**US MOBILE UNIT**  
**INFORMATION**

Updated 06/03/2026

## Single Trailer Support Unit

# ST32: TECHNICAL SPECIFICATIONS

### DIMENSIONS

- 13'5 HIGH X 102" WIDE X 48' LONG

### POWER REQUIREMENTS

- SINGLE PHASE 100 AMP SERVICE

### COMMUNICATIONS

- 10 DUAL LISTEN BELTPACKS
- 15 SINGLE MUFF HEADSETS
- 15 DOUBLE MUFF HEADSETS
- 5 IFB BELTPACKS
- 12 WALKIE TALKIES

### SUPPORT EQUIPMENT

- 2 FIBER BOOTH/FIELD KITS WITH VIDEO, AUDIO, IFB, COMMS AND NETWORKING
- 2 HYDRA I FIELD BOXES (1 IN EACH FIELD/BOOTH KIT)
- OUTBOARD MONITORS: 4 - 9" LCD

### GRAPHICS

- 2 VIZRT ARTIST


### CABLES

- 9MM SMPTE: 7 -500' 8 -250' 7 -100'
- 9MM SMPTE MULT: 2(5X100')
- MINI TRIAX: 4 -500' 2 -250' 8 -100' 6- 50' OR LESS
- MINI TRIAX MULT: 2 (5X100')
- DT12 2 -500' 6 -250' 15-100' 2 -50'
- DT12 FANOUT SETS: 14
- DT12 BREAKOUT BOXES: 4
- 4 PAIR MULT: 2- 100'
- TAC-12 ST-ST: 3-500' 3 -150' OR LESS
- TAC-4 ST-ST: 4 -1000'
- TAC-12 FANOUT SETS: 4
- 5 PAIR HD COAX LOOM 1 -125'
- 10 PAIR HD COAX LOOM 1 -100'
- 2 SETS OF 75' 4/0 POWER CABLE



ST32

# FLOORPLAN

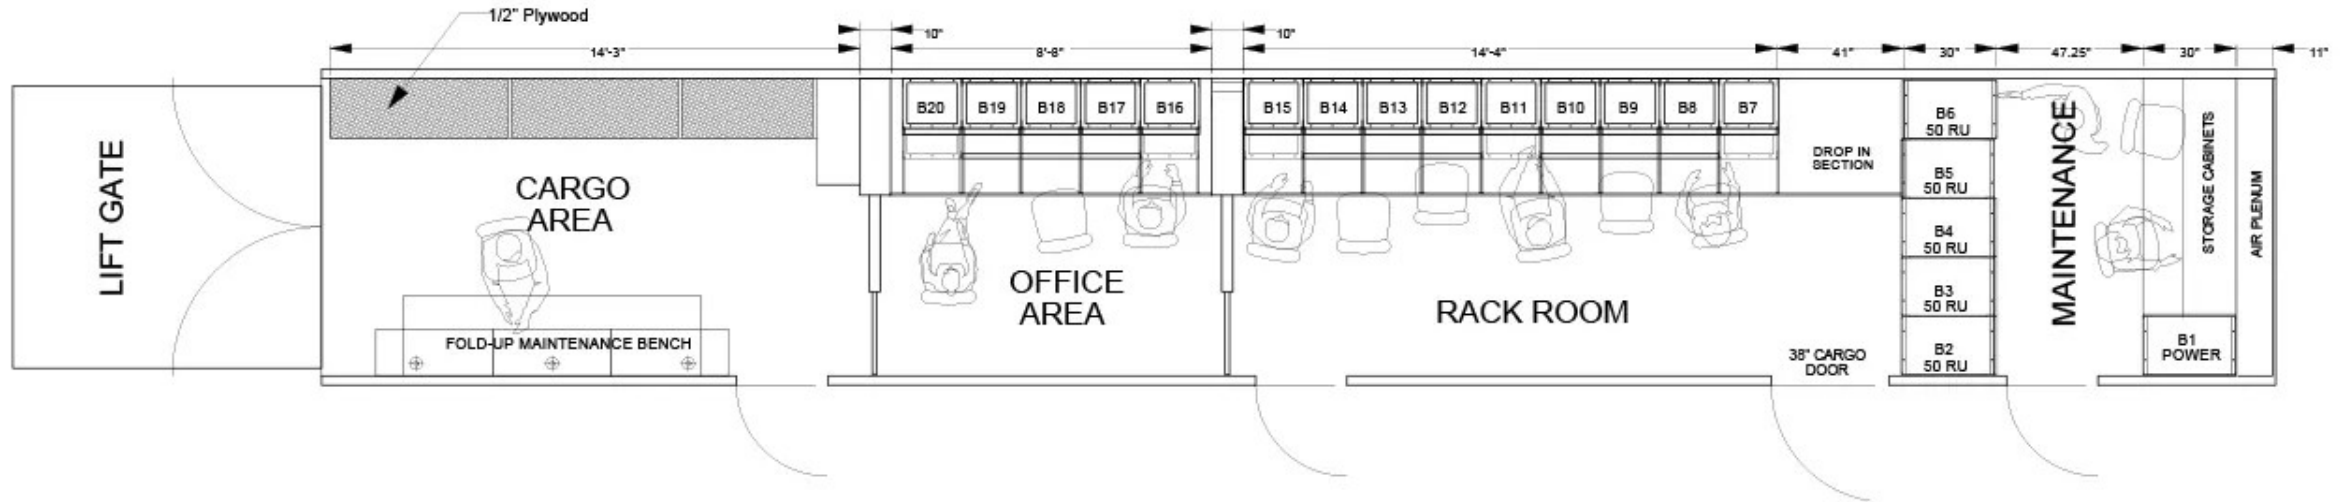

ST32

# MONITOR WALL

