



SUPER B US MOBILE UNIT INFORMATION

Updated 06/02/2026



1080p and HDR Capable | Single Support Unit Trailer

SUPER B: TECHNICAL SPECIFICATIONS

VEHICLE-SPECIFIC INFORMATION

- 65' LONG X 13'6" HIGH X 17' WIDE EXPANDED WITHOUT TRACTOR
- 85' LONG X 13'6" HIGH X 17' WIDE EXPANDED WITH TRACTOR
- CURBSIDE EXPANDO

POWER REQUIREMENTS

- 200 AMP, 208 VOLT, 3 PHASE, 4 WIRE

COMMUNICATIONS

- ADAM INTERCOM SYSTEM - 64 PORTS

SUPPORT EQUIPMENT


- EVERTZ EQX ROUTER
- HD VIDEO - 576 INPUTS X 874 OUTPUTS
- 64 INPUTS X 64 OUTPUTS EMBED/DE-EMBED
- AES 256 INPUTS X 256 OUTPUTS
- ANALOG AUDIO 192 INPUTS X 192 OUTPUTS
- 2 MADI
- 30 UTILITY FRAME SYNCNS/PROCESSORS
- 5 AJA FSHDR FRAME SYNCNS
- 1 AJA FS4 FRAME SYNCNS
- 3 AJA FS1 FRAME SYNCNS
- 3 HD VIDEO OVER FIBER TRANSMITTERS
- MONITORS: 5 - 22" LCD

CABLES

- DT12 4 -100'
- 3 DT12 FANOUT SETS
- 4 DT12 BREAKOUT BOXES
- RAMLATCH AUDIO CABLE 2 - 125'
- 5 PAIR HD COAX LOOM 15 -125' 37 -10'
- 10 PAIR HD COAX LOOM 13 -25'
- TAC 12 MILITARY: 5-500'
- TAC 12 ST TO ST: 8-250'
- TAC 24: 1 -75'
- ASSORTED SINGLE LINE COAX AND XLR CABLES
- 1 SET OF 100' 4/0 POWER CABLE




SUPER B FLOORPLAN

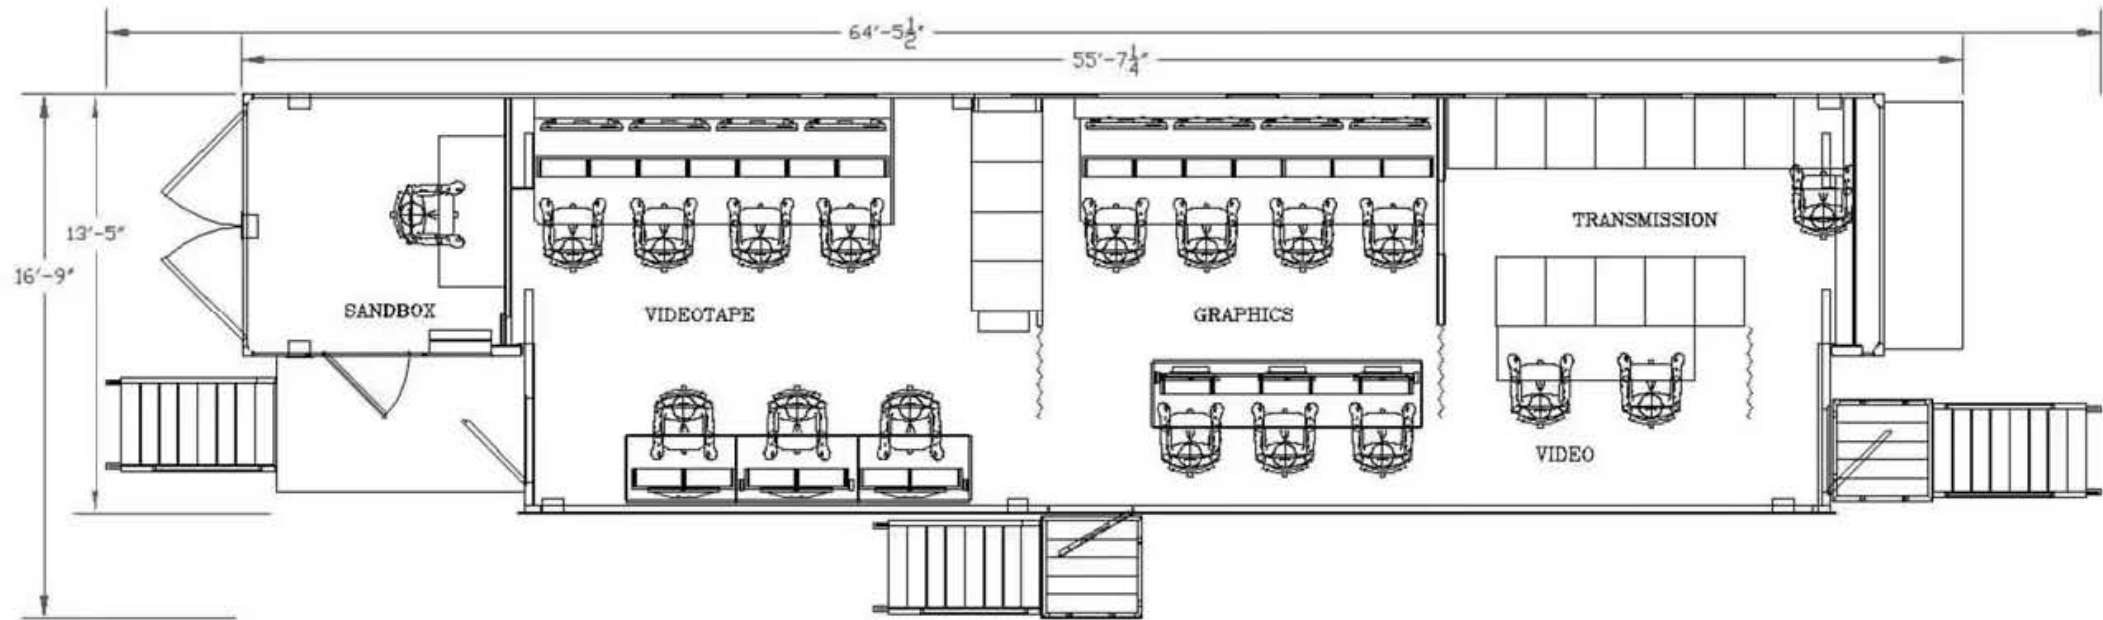


SUPER B

GRAPHICS MONITOR WALL

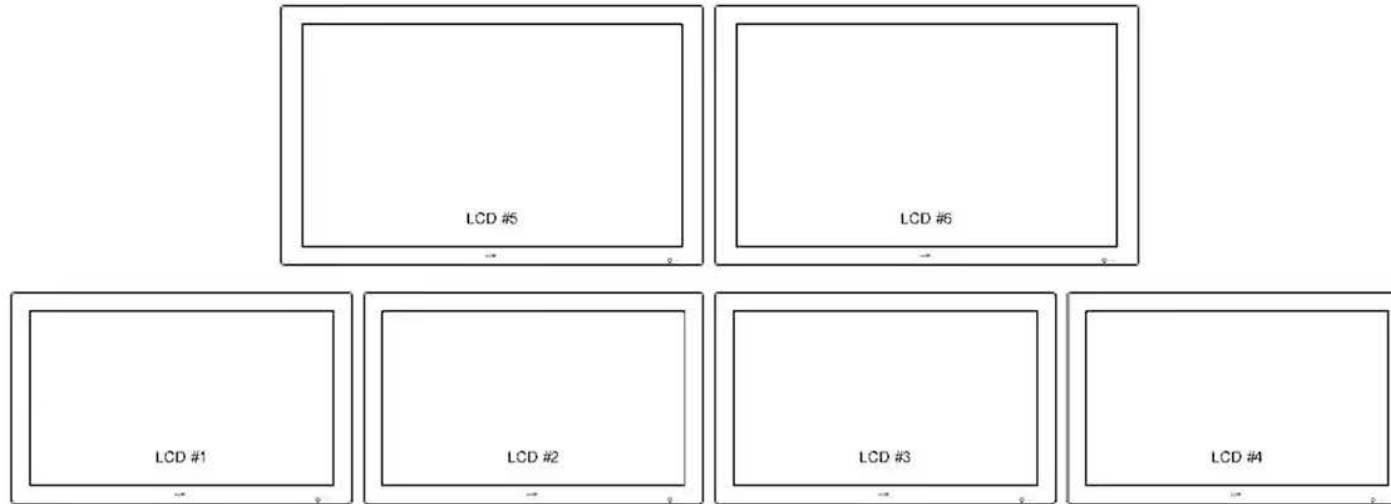


GRAPHICS CONSOLE

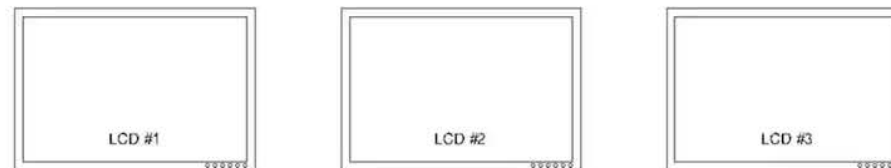

SUPER B

VIDEOTAPE MONITOR WALL

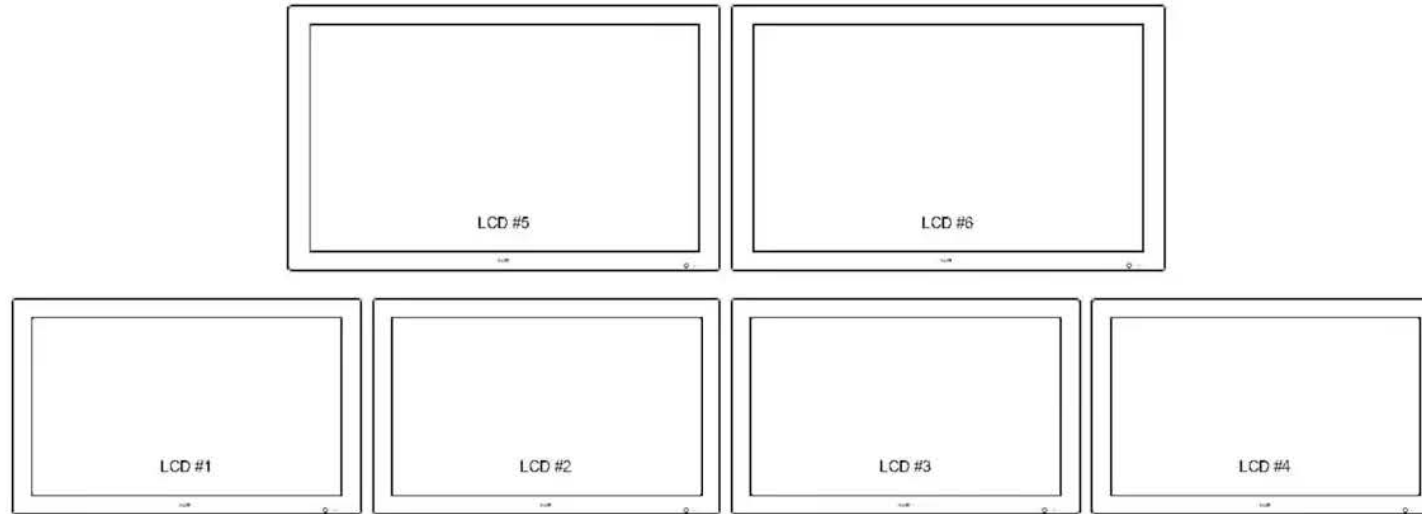

VIDEOTAPE CONSOLE

