



SUPERSHOOTER 62

US MOBILE UNIT INFORMATION

Updated 05/29/2026

IP-Based, TFC Driven, 1080p and HDR Capable | Single Trailer REMI Unit

SUPERSHOOTER 62: TECHNICAL SPECIFICATIONS

POWER REQUIREMENTS

- SS62 REQUIRES 1 400A SERVICES

CAMERAS

- 14 SONY HDC2500 CAMERAS
- 8 SLEDS
- 8 HEAVY PANHEAD W/STICKS
- 6 LIGHTWEIGHT STICKS
- 2 ENG KITS

LENSES

- 8 HARD LENSES
- 8 HANDHELD LENSES
- 2 WIDE ANGLE LENSES

RECORD/REPLAY

- WIRED FOR 4 EVS MACHINES

AUDIO

- CALREC ARTEMIS BEAM WITH 64 DUAL FADERS

SUPPORT EQUIPMENT

- NEP TFC IP ROUTER
- 224 INPUTS X 224 OUTPUT EMBED/DE-EMBED
- MADI 8 INPUTS X 8 OUTPUTS
- 8 COBALT 9905 FRAME SYNC UDX CARDS
- BASIC TRUCK COMPLIMENT OF CABLE, MICS, ETC.




SUPERSHOOTER 62

FLOORPLAN




SUPERSHOOTER 62

AUDIO MONITOR WALL

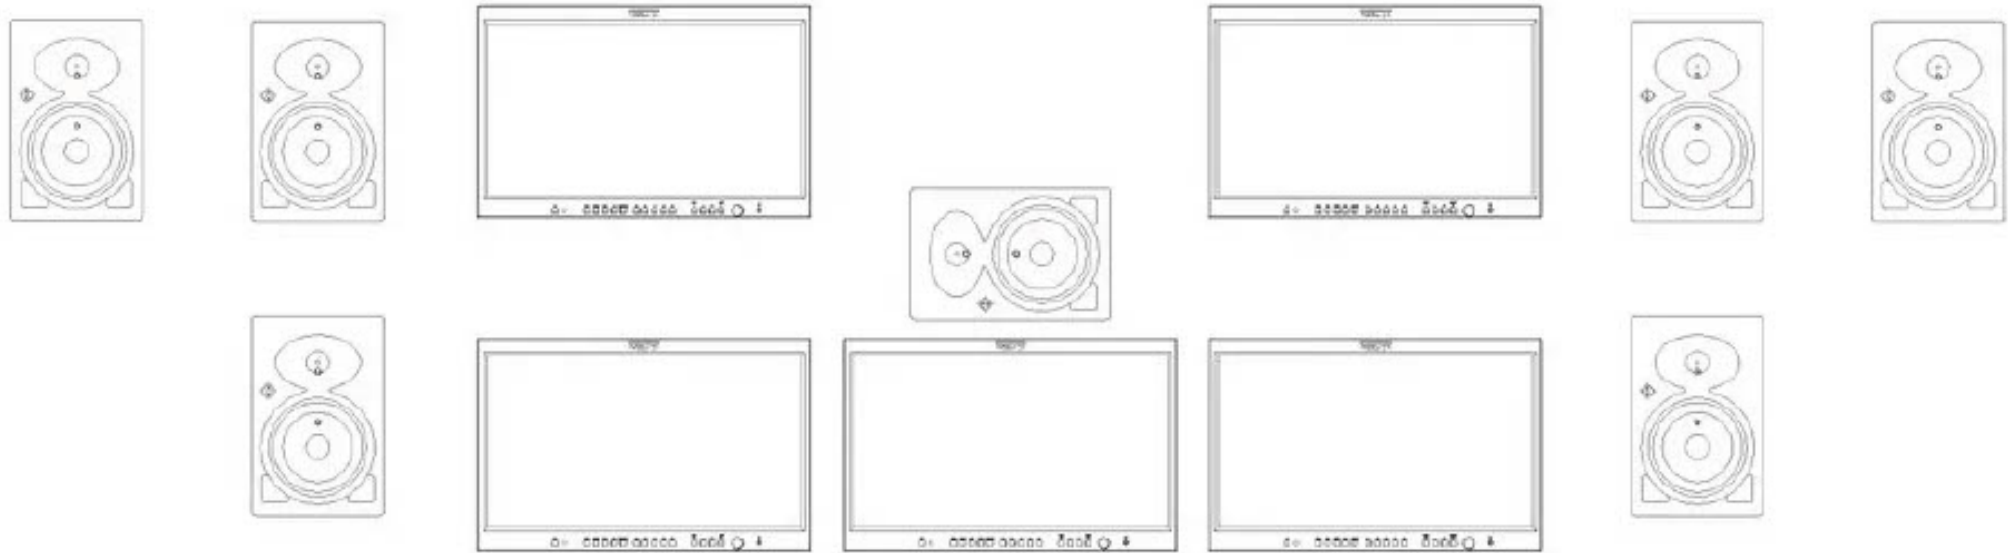


SUPERSHOOTER 62

VIDEO MONITOR WALL

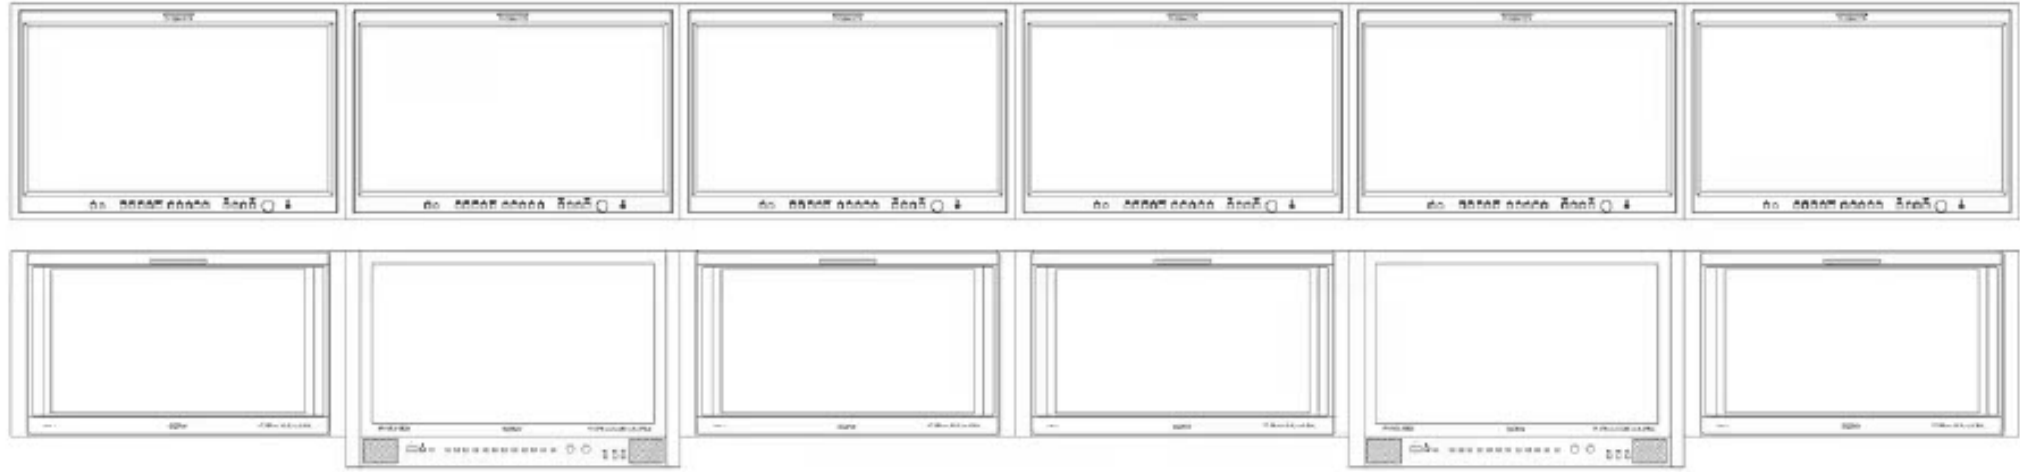

SUPERSHOOTER 62

FRONT FLEX MONITOR WALL

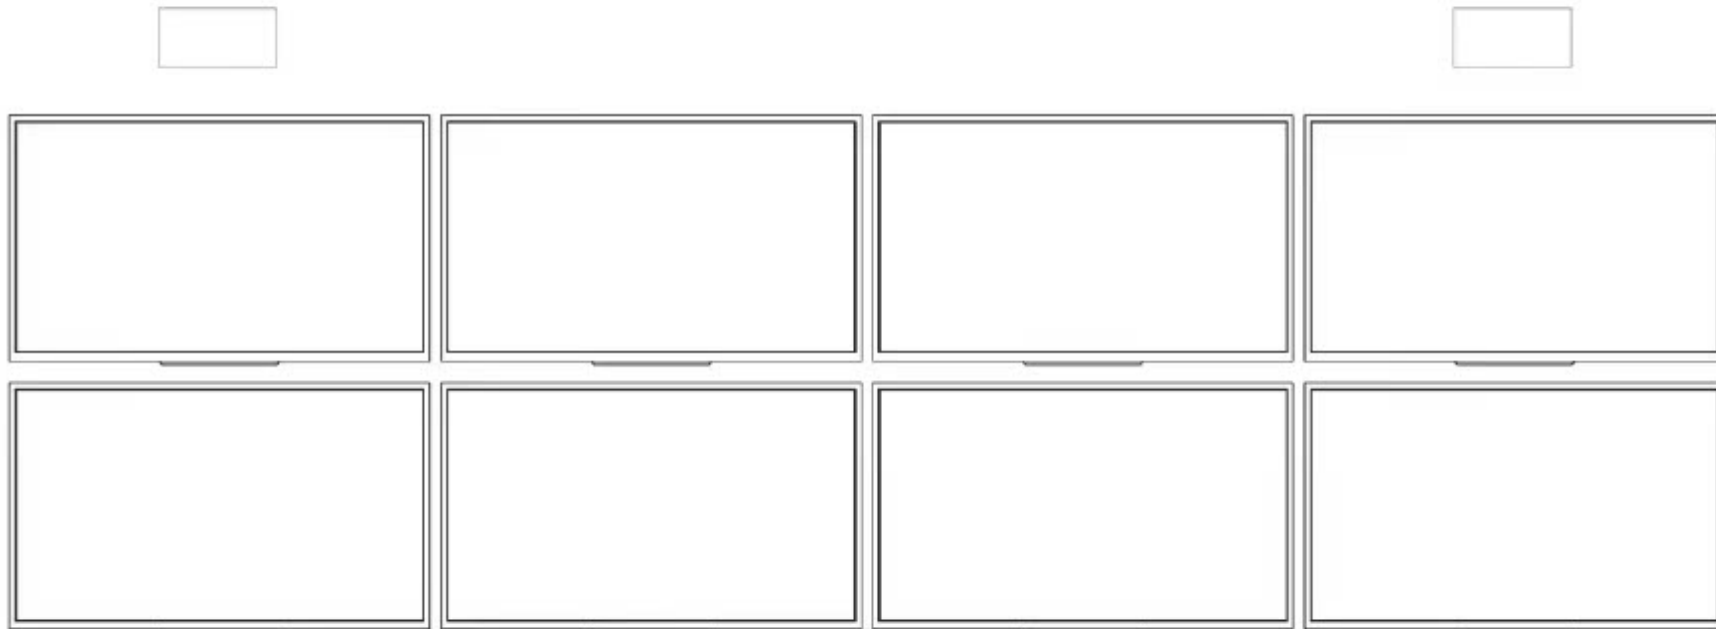

SUPERSHOOTER 62

REAR FLEX MONITOR WALL

