



# SUPERSHOOTER 61

## US MOBILE UNIT

### INFORMATION

Updated 05/29/2026

NEPGROUP.COM



1080p and HDR Capable | Single Trailer REMI Unit

# SUPERSHOOTER 61: TECHNICAL SPECIFICATIONS

## POWER REQUIREMENTS

- REQUIRES 1 200 AMP SERVICE

## CAMERAS

- 10 SONY HDC2500 CAMERAS
- 9 SLEDS
- 9 HEAVY PANHEAD W/STICKS
- 4 LIGHTWEIGHT STICKS

## LENSES

- 9 HARD LENSES
- 2 HANDHELD LENSES
- 3 WIDE ANGLE LENSES

## RECORD/REPLAY

- UPON REQUEST

## AUDIO

- CALREC ALPHA WITH 64 FADERS


## SUPPORT EQUIPMENT

- ROSS 12G ULTRIX ROUTER, 144X144 WITH MULTIVIEWER
- FULL EMBED/DE-EMBED
- MADI INPUTS/OUTPUTS
- FRAME SYNC LICENSE
- 6 AJA FS HDR FRAME SYNC
- 4 UDX CONVERTERS
- BASIC TRUCK COMPLIMENT OF CABLE, MICS, ETC.



## SUPERSHOOTER 61

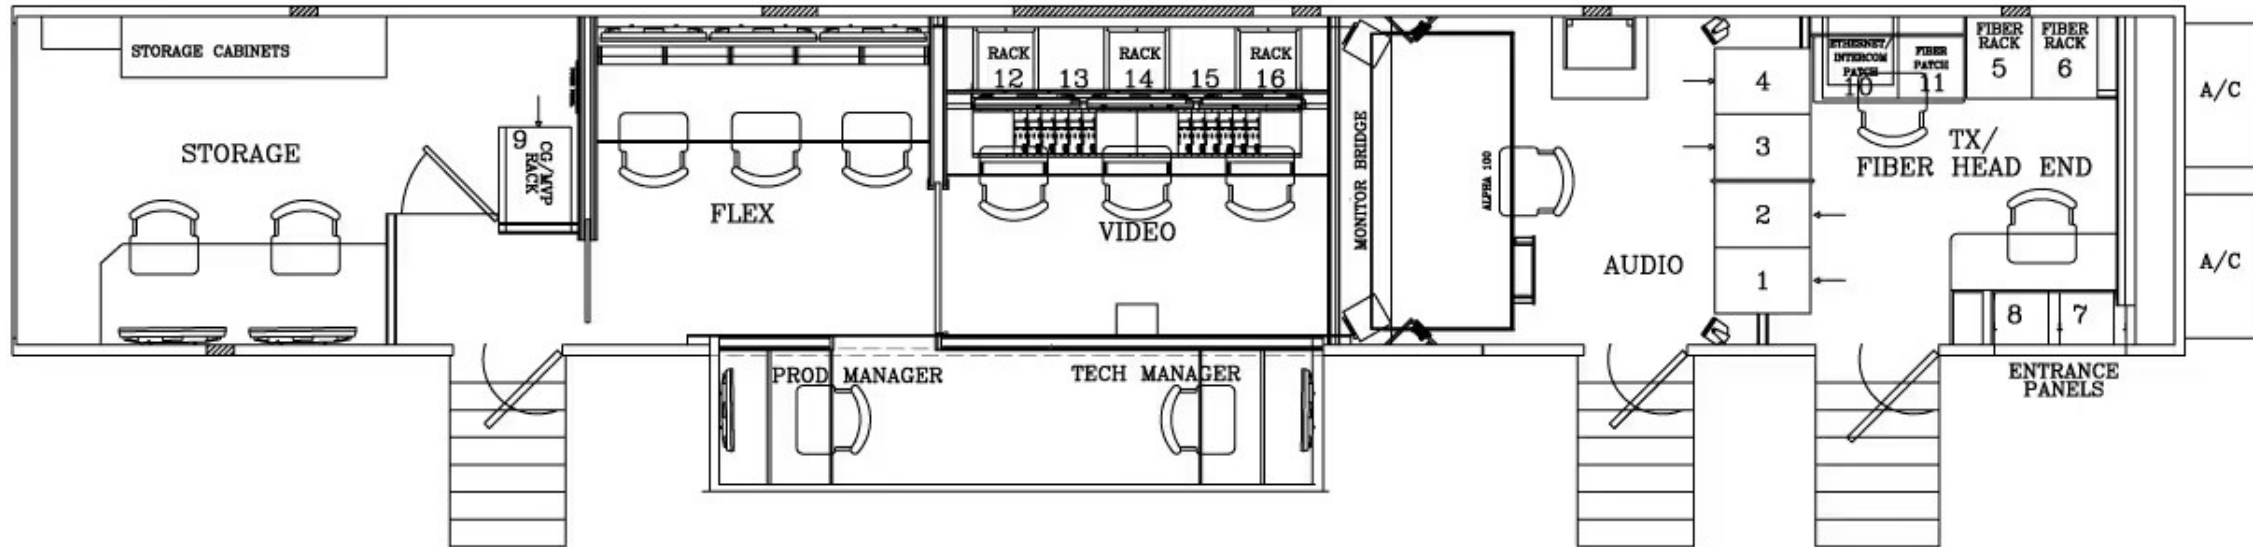

# FLOORPLAN



SUPERSHOOTER 61

# FLEX MONITOR WALL




	TRIPLE AC OUTLETS		TRIPLE AC OUTLETS	
KP-32		KP-32		KP-32
TSL SPK		TSL SPK		TSL SPK
RTR PANEL		RTR PANEL		RTR PANEL
BLANK		BLANK		BLANK




# SUPERSHOOTER 61

# VIDEO MONITOR WALL

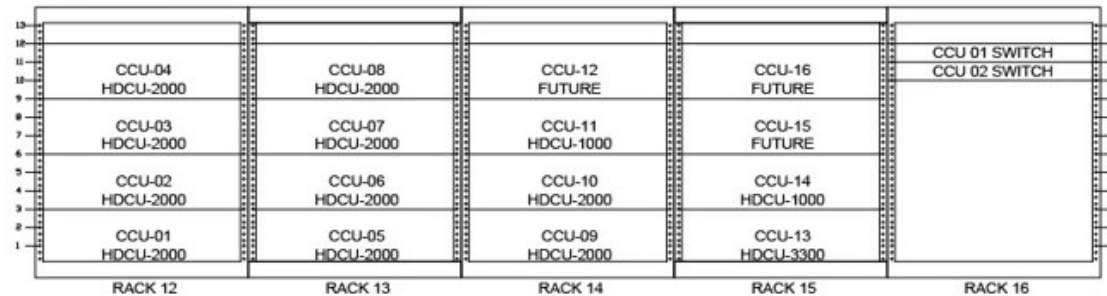



SUPERSHOOTER 61

# AUDIO MONITOR WALL

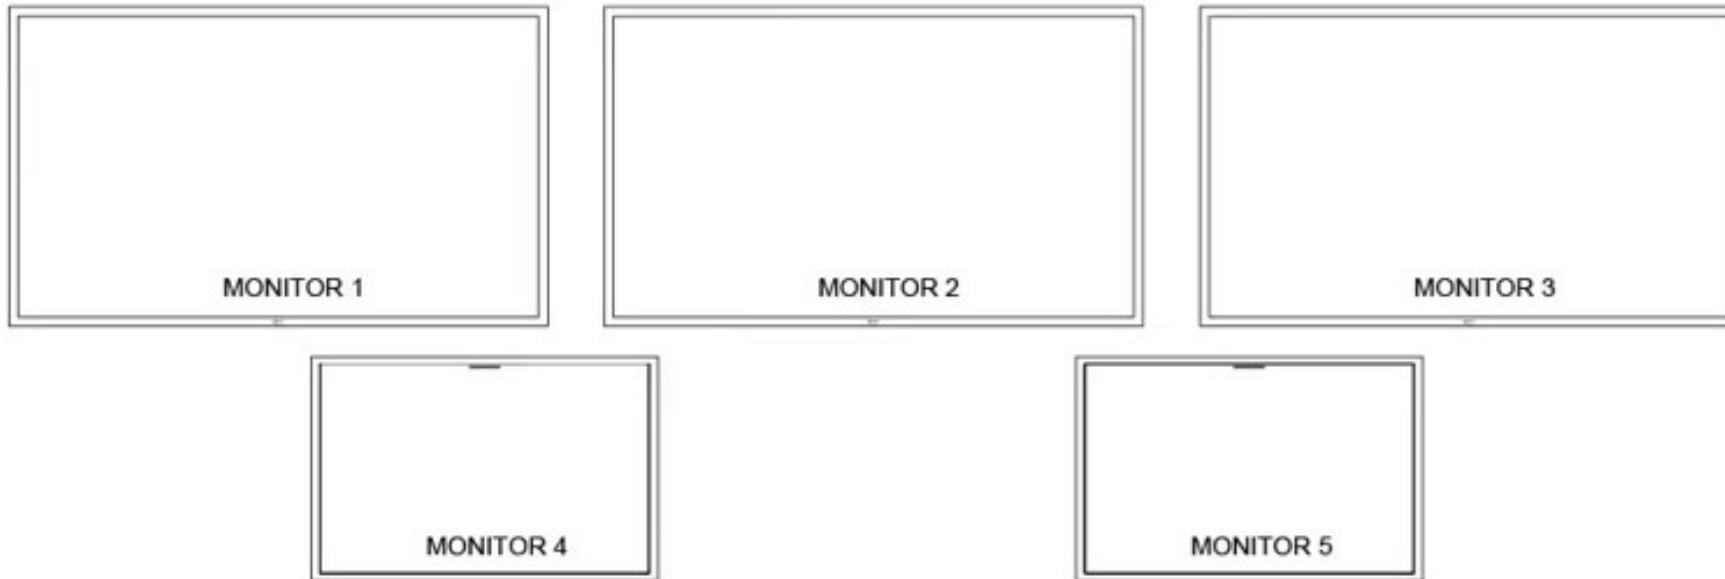

SUPERSHOOTER 61

# PRODUCTION TECH MANAGER MONITOR WALL



SUPERSHOOTER 61

# STORAGE MONITOR WALL

