



M-3

US MOBILE UNIT INFORMATION

Updated 08/07/2026

NEPGROUP.COM



1080i & 720p Capable | Single Trailer Unit Based in Hawaii

M-3: TECHNICAL SPECIFICATIONS

POWER REQUIREMENTS

- 208V SINGLE OR 3 PHASE, 200 AMPS, 150' CAMLOCK

PRODUCTION SWITCHER

- GVG KALYPSO SWITCHER, 4 M/E

CAMERAS

- 10 SONY HDC1500 CAMERAS
- 5 SLEDs
- 5 HEAVY PANHEAD W/STICKS
- 4 LIGHTWEIGHT STICKS

LENSES

- 2 CANON LENS 22:1 HANDHELD LENS
- 5 FUJINON 87X9.3 HARD LENS
- 1 FUJINON HA13X4.5 WIDE ANGLE LENS

RECORD & PLAYBACK

- 3 EVS XT3 6 CHANNEL LSM
- 1 EVS XT3 4 CHANNEL SPOTBOX
- 1 EVS X-FILE[3]
- 2 DVD RECORDER W/ REMOTE CONTROL

AUDIO

- DIGICO MODEL SD10B AUDIO CONSOLE
- 40 ANALOG INPUTS
- 8 MADI2 DIGICART
- 1 CD PLAYER

MICROPHONES

- 6 ANNOUNCER HEADSETS
- 4 DALTECH ANNOUNCE CONSOLES
- 9 SHORT SHOTGUN MICROPHONES
- 10 LONG SHOTGUN MICROPHONES
- 6 STICK MICROPHONES
- 5 LAVALIER MICROPHONES

COMMUNICATIONS

- ADAM INTERCOM SYSTEM - 80 PORTS
- 21 DUAL LISTEN BELTPACKS
- 10 SINGLE MUFF HEADSETS
- 10 DOUBLE MUFF HEADSETS
- 7 IFB BELTPACKS
- 1 PHONE SYSTEM WITH 8 LINES
- 4 TIF - TELEPHONE INTERFACES


SUPPORT EQUIPMENT

- HARRIS ROUTER
- HD VIDEO - 224 INPUTS X 224 OUTPUTS(32 CHANNELS)
- 16 UTILITY FRAME SYNCs/PROCESSORS
- MONITORS: 1-19" LCD, 2 -18" LCD, 2 - 15" LCD, 9 - 9" ANALOG



M-3

FLOORPLAN

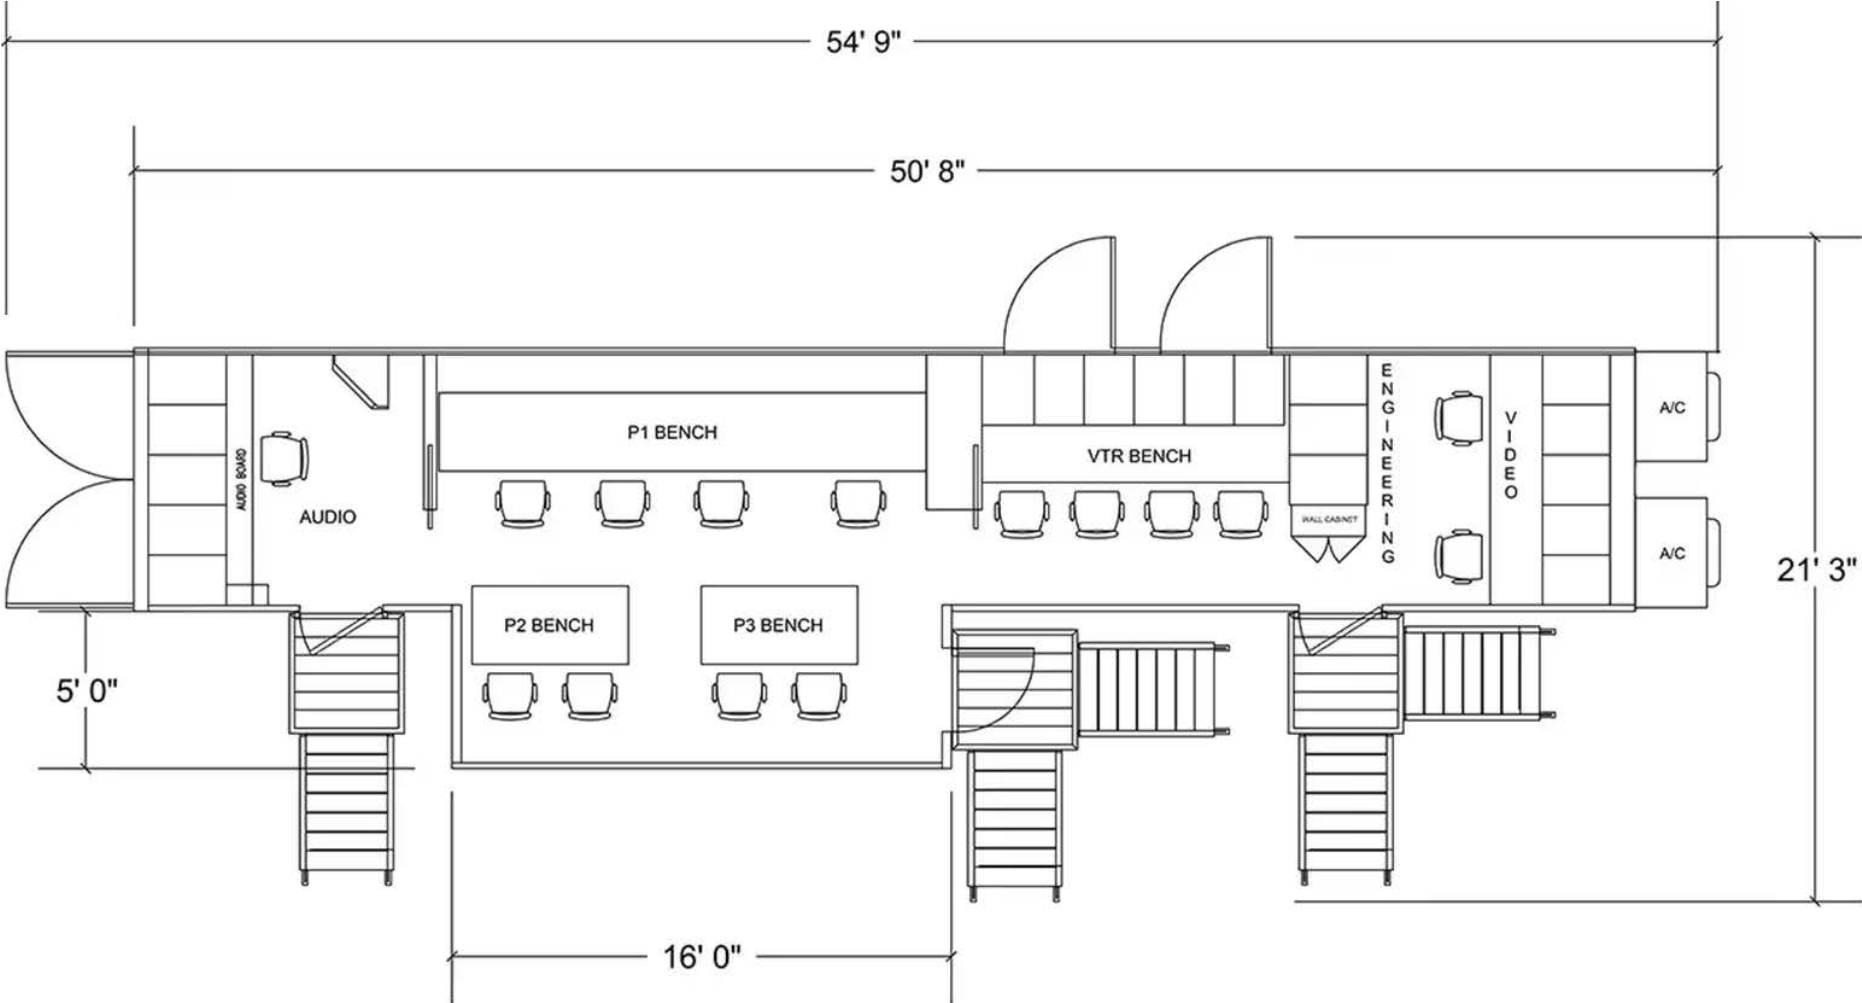

PRODUCTION MONITOR WALL

