CANTILEVER SLIDING SAFETY GATE DATA SHEET

COMPANY: _____

CONTACT PERSON: _____

LOCATION: _____

PHONE: _____ **EXT:** _____

EMAIL: _____

EQUIPMENT #: _____

QUANTITY: _____



PLEASE SUBMIT PHOTOS WITH YOUR DATA SHEETS

INFORMATION REQUIRED

ITEM	PLEASE INDICATE
A - Width of Gate Opening	
B - Height of Rolling Gate	
C - Clearance From Floor or Base (min. 6")	
D - Available Space on Left Side	
E - Available Space on Right Side	
Gate Orientation	◯ Single Left ◯ Single Right ◯ Double Gates

When there is limited space on one side or the other adjustment can be made to reduce the length of gate extending past the post when open.
(this will increase the amount of gate extending past the post on the opposite side)

GUARD COATING/MATERIAL

ITEM	PLEASE INDICATE
Color - Guard Body	◯ *Yellow ◯ Black ◯ Other ◯ Uncoated
Color - Guard Mesh	◯ *Yellow ◯ Black ◯ Other
Guard Material	◯ *Mild Steel ◯ Stainless ◯ Aluminum ◯ Brass
Guard Coating	◯ *Powder Coat ◯ 2-Stage Pwdr Coat
Stainless Steel Hardware	◯ Yes ◯ *No

Items marked with * are standard

How would you like to attach the guard to base or floor?


◯ Concrete Anchors ◯ Welded On ◯ Other (please specify)

ATTENTION


- ROLLING SAFETY GATES ARE CANTILEVERED FROM THE MOUNTING POSTS AND MAY NOT BE FEASABLE IN LIMITED SPACE SITUATIONS.
- WHEN DEALING WITH LIMITED SPACE OR OBSTRUCTIONS, PLEASE CONTACT BELT CONVEYOR GUARDING TO DISCUSS AVAILABLE OPTIONS

**It is the responsibility of end user to ensure that all possible obstructions are accounted for and all measurements and dimensions are accurate.*


SINGLE GATE IN CLOSED POSITION (left side shown)

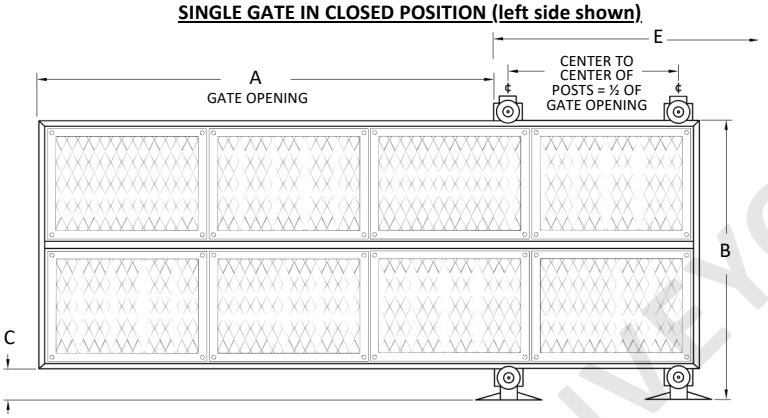

DOUBLE GATE IN CLOSED POSITION

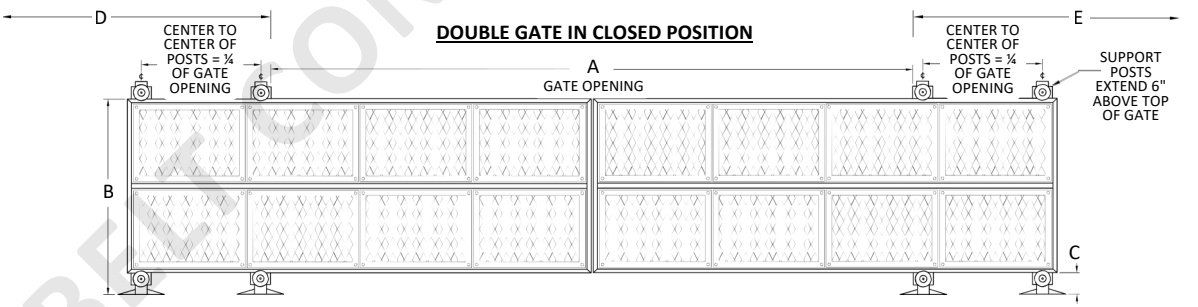

DOUBLE GATE IN OPEN POSITION

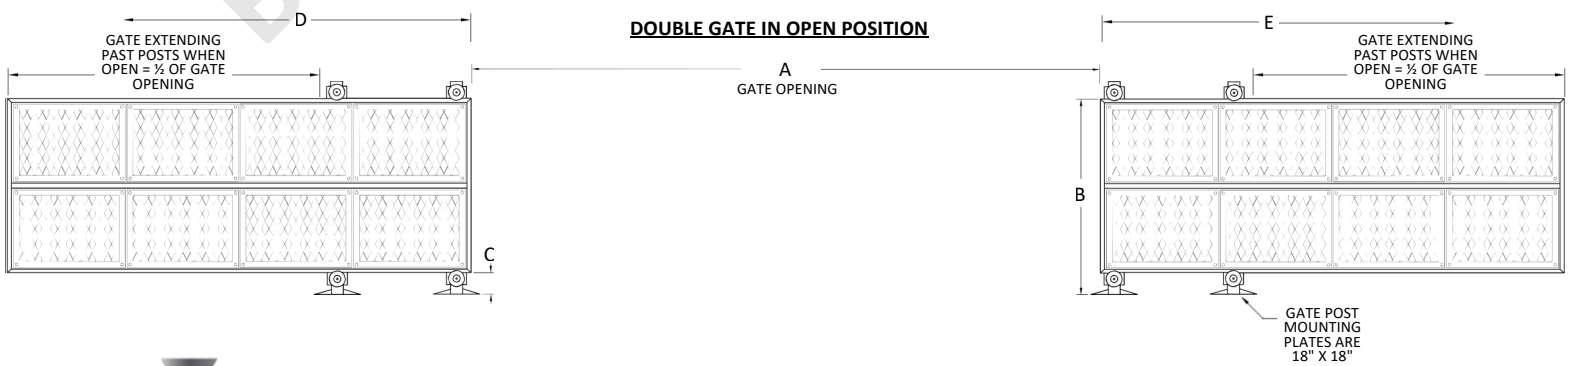

BELT CONVEYOR GUARDING