


PROTECTING YOUR PERFORMANCE



■ Branches ■ Distribution and sales partnerships

BERGOLIN

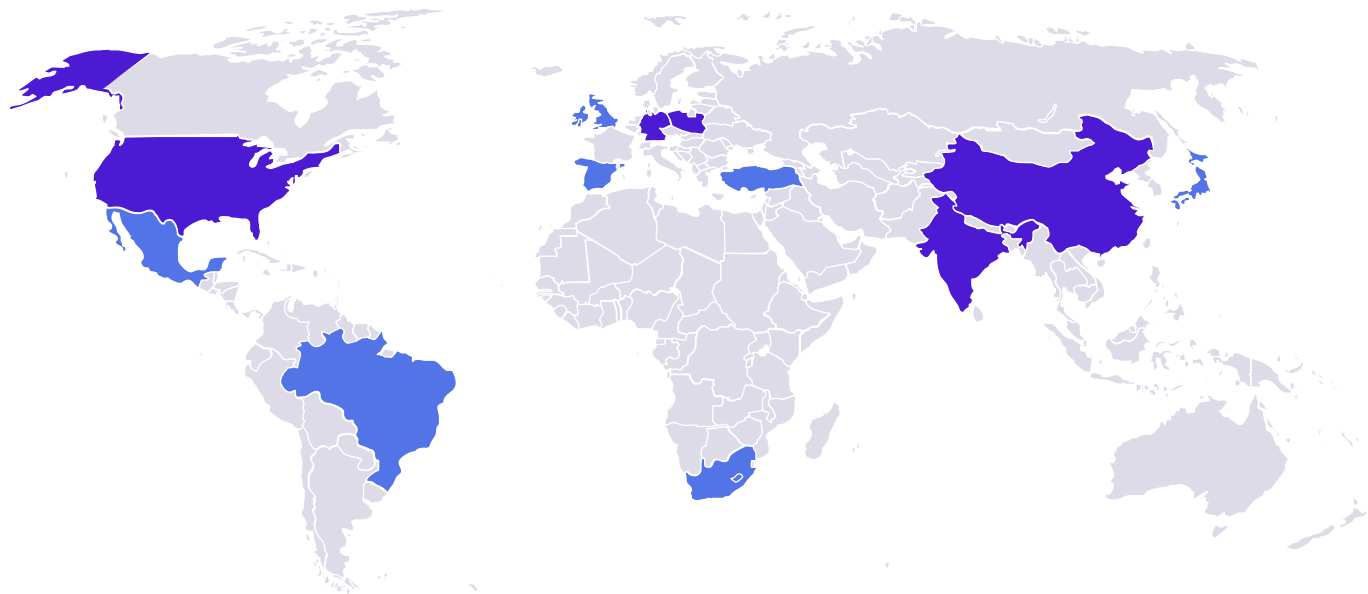

No primer
needed

GERMANY	USA	CHINA	INDIA	POLAND
Bergolin GmbH & Co. KG Sachsenring 1 27711 Osterholz- Scharmbeck www.bergolin.de info@bergolin.de +49 (0) 4795 / 95899-0	Bergolin US LP 5126 South Royal Atlanta Dr. Tucker, GA 30084 www.bergolin.com info@bergolin-usa.com +1 832-384-1203	Bergolin Coatings Trading (Shanghai) Co. Ltd. Room A18, Floor 35 PingAn Finance Center No. 757 Mengzi Road Huangpu District Shanghai 200023 www.bergolin.cn info@bergolin.com.cn +86 4001 0099 23	Bergolin India Private Ltd. Office No. 808 Lloyd Chambers 409 Barne Road Mangalwar Peth Pune-411011 Maharashtra www.bergolin.com info@bergolin.com +91 (73) 18768097	Bergolin-Polska Sp. z o.o ul. Staszica 2 60-527 Poznan www.bergolin.pl info@bergolin.pl +48 (61) 8480-701

Multi Separator
The ALL-IN-ONE coating solution
for separator systems

BERGOLIN

PROTECTING
YOUR PERFORMANCE

Multi Separator

Your benefits at a glance

ready for
load after
6 hours*

- 1

One product for light liquid and grease separators
Reduce storage costs and simplify your ordering process.
- 2

No primer required
Thanks to its excellent adhesion to pretreated concrete, Bergolin MULTISeparator can be applied without any additional priming. Save time and resources.
- 3

Crack bridging possible with fleece insert
With the integrated fleece insert, you can easily bridge cracks and pores and ensure a uniform coating that reliably seals even in refurbishment projects.

- 4

Ready for load after just 6 hours of drying*
Your system can be put back into operation quickly – ideal for time-critical projects.
- 5

Resistant even at water temperatures of up to 80°C**
The Multi Separator withstands even high temperatures: continuous exposure at 80°C is possible for up to one month, at 60°C for up to two months and at 40°C even for up to two years**.
- 6

Tested according to DIN EN 858-1, DIN EN 1825-1, BRL 5251 and BRL 5252
Highest quality standards through external testing institutes and regular monitoring.

* Drying time at 20°C and 50% relative humidity
** Continuous exposure specifications according to internal test procedures: at 80°C up to one month, at 60°C up to two months, at 40°C up to two years.

Perfect for refurbishment – Efficiency meets safety

MULTISeparator shows its full performance especially in refurbishment projects. The integrated fleece insert effectively bridges cracks and pores already in the first work step, significantly reducing application time. The short drying time of just 6 hours allows separator systems to be put back into operation quickly. This minimizes downtime and noticeably speeds up project execution. The exceptional resistance to chemical media and temperature fluctuations also ensures long-term use under demanding conditions.



Save a day with the Bergolin solution

