



PROTECTING YOUR PERFORMANCE

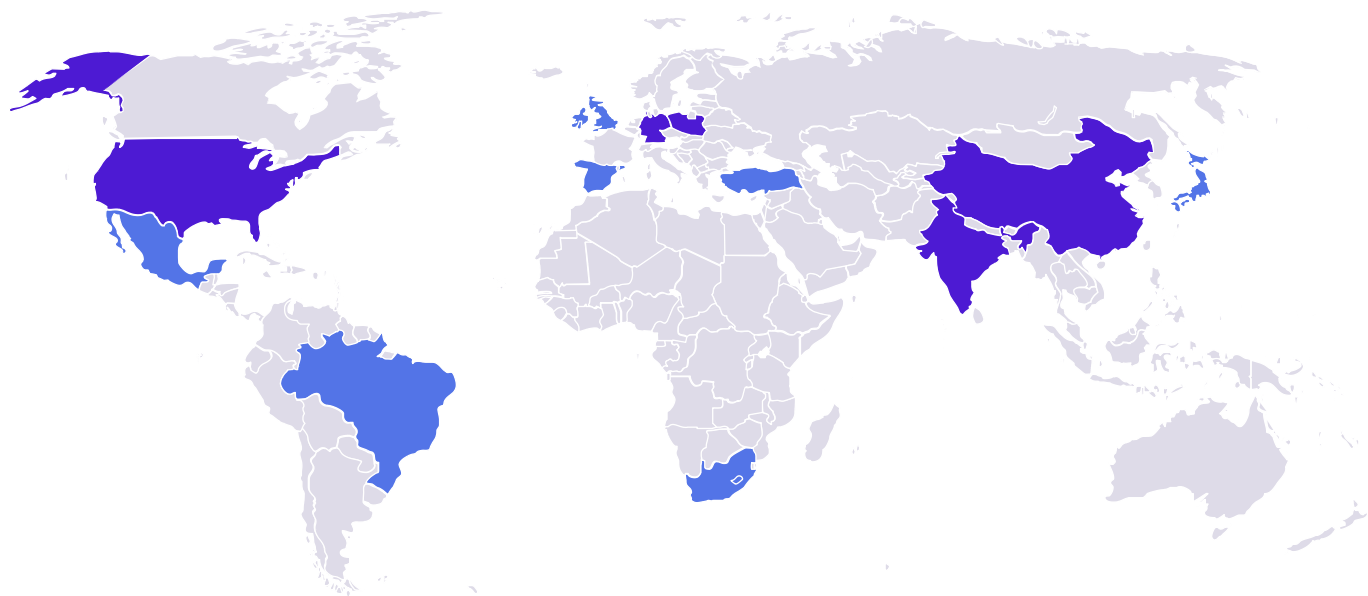

■ Branches ■ Distribution and sales partnerships

GERMANY	USA	CHINA	INDIA	POLAND
Bergolin GmbH & Co. KG Sachsenring 1 27711 Osterholz-Scharmbeck www.bergolin.de info@bergolin.de +49 (0) 4795 / 95899-0	Bergolin US LP 5126 South Royal Atlanta Dr. Tucker, GA 30084 www.bergolin.com info@bergolin-usa.com +1 832-384-1203	Bergolin Coatings Trading (Shanghai) Co. Ltd. Room A18, Floor 35 PingAn Finance Center No. 757 Mengzi Road Huangpu District Shanghai 200023 www.bergolin.cn info@bergolin.com.cn +86 4001 0099 23	Bergolin India Private Ltd. Office No. 808 Lloyd Chambers 409 Barne Road Mangalwar Peth Pune-411011 Maharashtra www.bergolin.com info@bergolin.com +91 (73) 18768097	Bergolin-Polska Sp. z o.o ul. Staszica 2 60-527 Poznan www.bergolin.pl info@bergolin.pl +48 (61) 8480-701

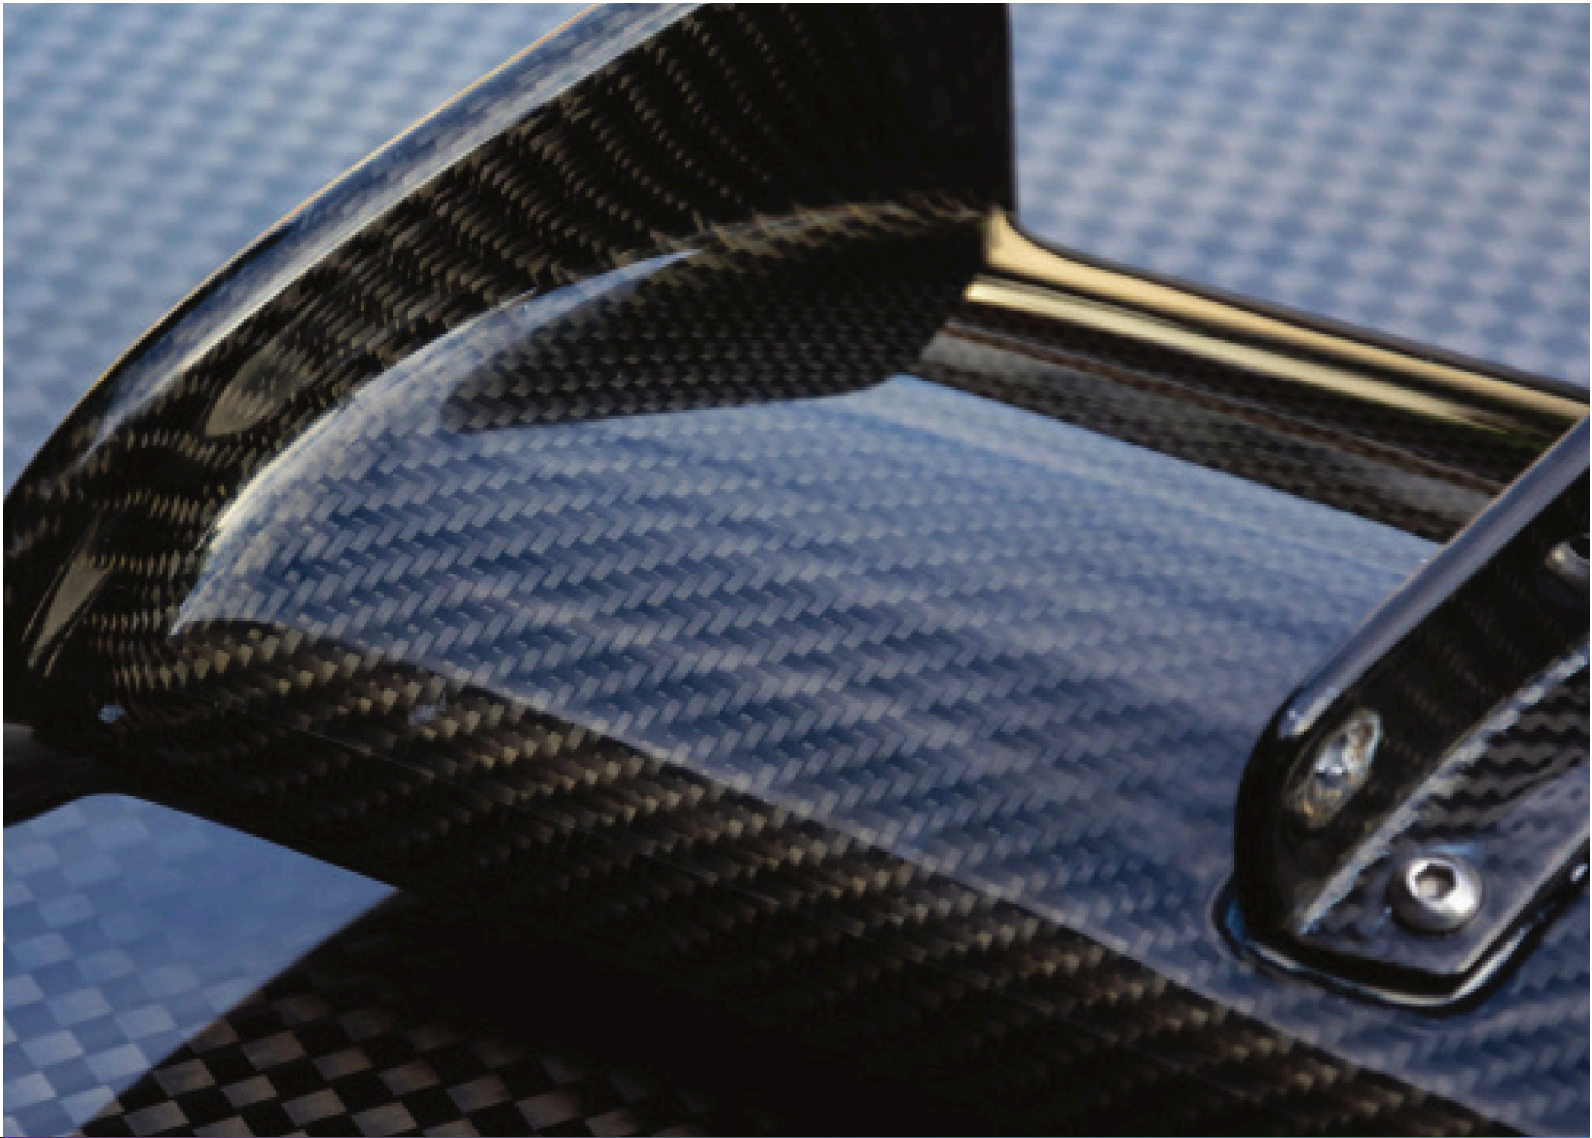

Industrial Coatings

Carbon Fiber Coatings

Meet the future of carbon fiber coatings

YOUR BENEFITS WITH BERGOLIN

Bergolin Gelcoat 2D3800 – The visible-carbon all-rounder

Versatile use as in-mold gelcoat and post-mold clear coat for infusion and prepreg processes.

Perfect repairs with our uniquely clear pore filler

Bergolin Carbon Filler 2D1100 covers pinholes, pores and scratches in a single step – for a crystal-clear application of up to 150 µm – ideal for depth effects. It is also solvent-free and can be used as an in-mold gelcoat as well.

Outstanding high-gloss finish and surface resistance

Our clear coat has passed the current OEM standards with excellent results and offers maximum durability, UV and scratch resistance.

Fast drying and further processing

Gelcoat and pore filler can be applied wet-on-wet without preparing or sanding the surface in between.


Very good sanding and polishing properties

The material properties of both products reduce process times and consumables.

Excellent lamination interval

Bergolin Gelcoat 2D3800 can be laminated without surface activation within 6 h – 72 h*.



*For optimal adhesion between gelcoat and resin, we expressly recommend tempering the part directly after resin infusion. Please coordinate the tempering parameters with Bergolin Technical Service.

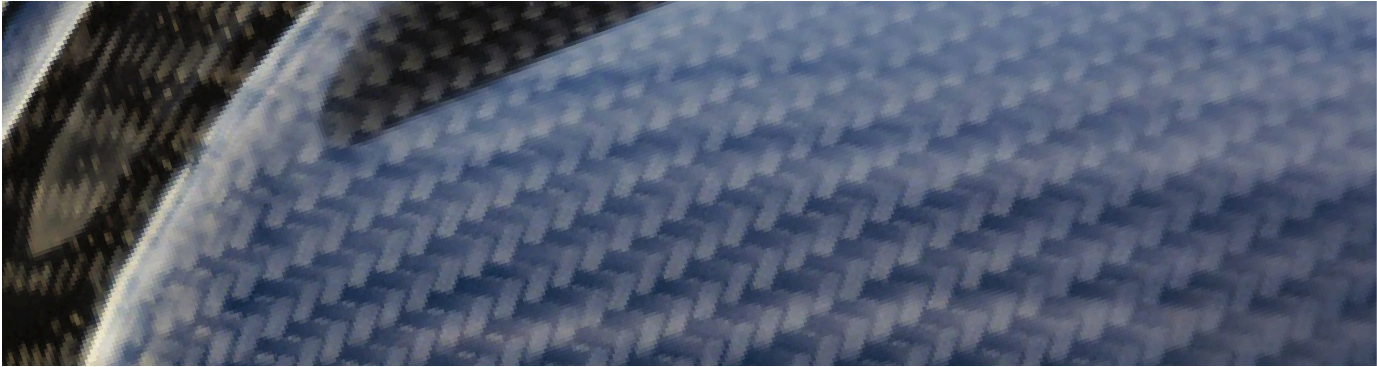

Gelcoats for epoxy, polyester and vinyl ester resins

Bergolin offers a range of 2K PU gelcoats for epoxy, polyester and vinyl ester resins for the production of high-quality CFRP components where strength, protection and design play an important role. Depending on the application, unique depth effects, a special grip or a “soft-touch” surface with different gloss levels can be achieved. The gelcoats, which can also be used as topcoats, also offer a high protective function and very good adhesion without the use of adhesion promoters, and are particularly lightfast.

Bergolin’s leading carbon fiber solutions

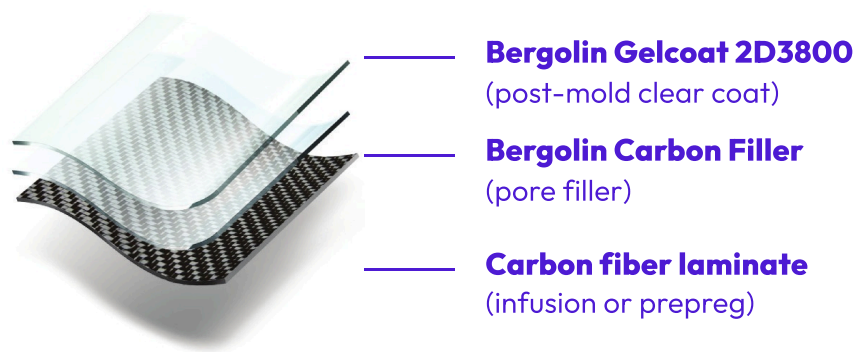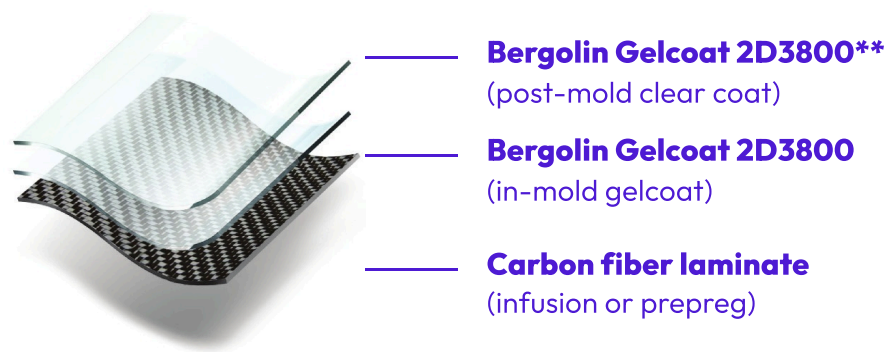

****Other topcoat variants: Bergolin Gelcoat 2D3810 (glossy) and Bergolin Gelcoat 2D3820 (matt) with soft-touch effect**