PROTECTING YOUR PERFORMANCE

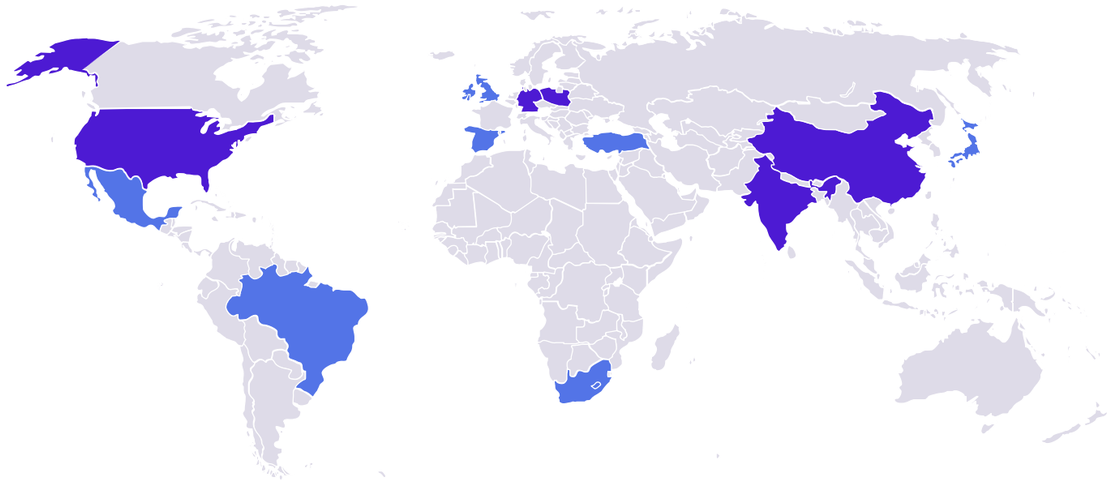

Branches

Distribution and sales partnerships

GERMANY

Bergolin GmbH & Co. KG
Sachsenring 1
27711 Osterholz-
Scharmbeck

www.bergolin.de
info@bergolin.de
+49 (0) 4795 / 95899-0

USA

Bergolin US LP
5126 South Royal
Atlanta Dr.
Tucker, GA 30084

www.bergolin.com
info@bergolin-usa.com
+1 832-384-1203

CHINA

Bergolin Coatings Trading
(Shanghai) Co. Ltd.
Room A18, Floor 35
PingAn Finance Center
No. 757 Mengzi Road
Huangpu District
Shanghai 200023

www.bergolin.cn
info@bergolin.com.cn
+86 4001 0099 23

INDIA

Bergolin India Private Ltd.
Office No. 808
Lloyd Chambers
409 Barne Road
Mangalwar Peth
Pune-411011
Maharashtra

www.bergolin.com
info@bergolin.com
+91 (73) 18768097

POLAND

Bergolin-Polska Sp. z o.o
ul. Staszica 2
60-527 Poznan

www.bergolin.pl
info@bergolin.pl
+48 (61) 8480-701

BERGOLIN

BERGOLIN



BERGOPUR MS SINGLE-COAT 6D789

One paint. One coat.
Full protection.

PROTECTING YOUR PERFORMANCE

BERGOPUR MS SINGLE-COAT

Corrosion protection and finish
in one step

Direct-to-metal, single coat

Tested to DIN EN ISO 12944-6 C4-H

High sag resistance

Bergopur MS Single-Coat 6D789 is a high-build 2K polyurethane coating applied **directly to blast-cleaned steel (DTM)**. In just one coat it delivers **effective corrosion protection and good weather resistance**: ideal for gas tanks, construction and agricultural machinery and many other industrial steel components.

Fewer coats. More efficiency.

Thanks to its **high sag resistance**, even high film thicknesses can be applied without runs. The result: an even, durable coating with far fewer application steps.

Typical applications:

- Gas tanks
- Construction machinery
- Agricultural machinery
- Steel components
- Industrial plants

1 coat
corrosion protection and topcoat in one

C4-H
corrosivity category, externally tested

> 250 µm
film thickness in one coat

At a glance

Product	High-build 2K polyurethane single-coat paint
Use	Blast-cleaned steel surfaces in industrial use, e.g. gas tanks, construction and agricultural machinery
Color / gloss	RAL 7035 (others on request), matt, semi-gloss to glossy
Application	Brush, roller, airless and airmix spraying
Testing	Externally tested to DIN EN ISO 12944-6, C4-H
System	DTM as standard; if required with primer 2K-Epex-Hydro-Grund 3E602 or Epex zinc dust 3E750

For a wide range of steel applications

Efficient. Robust. Weatherproof.



Your gain

Faster
One step instead of several coats

Robust
Effective corrosion protection up to C4-H

Flexible
From brush to spray line

Gloss level and color to your needs

Your benefits

- **Single coat direct-to-metal**: saves time and material
- **Effective corrosion protection**, externally tested to C4-H
- **Good weather resistance** for outdoor use
- **High sag resistance**: thick films without runs
- **Versatile application** by brush, roller or spray

Efficient

Direct-to-metal instead of a multi-coat build-up: fewer steps, shorter lead times, lower costs.

Protected

Effective corrosion protection and good weather resistance, externally tested to DIN EN ISO 12944-6, C4-H.

Even

High sag resistance for an even, durable coating, even at higher film thicknesses.