
ANCHOR PENDANT SOCKETS

MORE PRODUCT INFO

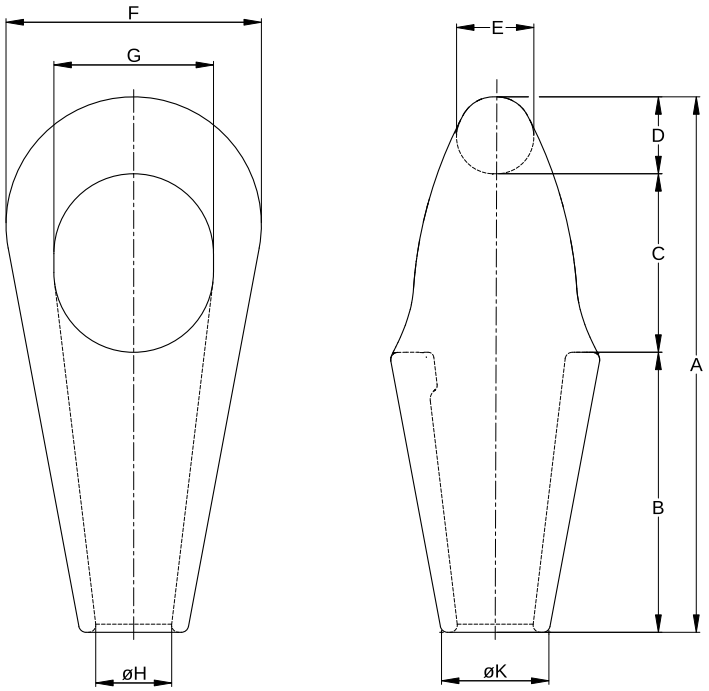

METRIC

MODEL NUMBER	MBL (MTONS)	WIRE ROPE Ø (MM)	APPROX. RESIN VOLUME (CC)	DIMENSIONS (MM)									WEIGHT (KG)
				A	B	C	D	E	F	G	ØH	ØK	
APS 512	130	31 - 36	350	270	141	88	40	36	140	82	41	60	7.6
APS 517	160	37 - 42	500	309	162	103	44	40	152	92	46	67	10.5
APS 519	200	43 - 48	700	369	193	123	53	48	176	110	53	74	16
APS 522	250	49 - 54	1250	408	210	140	58	52	200	125	58.5	83	21.5
APS 524	320	55 - 60	1425	452	230	157	65	58	226	140	68	96	31
APS 526	400	61 - 68	1850	499	250	174	75	66	250	156	76	107	41.7
APS 527	500	69 - 75	2300	551	280	191	80	70	275	171	80	115	55
APS 528	600	76 - 80	3400	591	309	196	86	76	290	180	89	125	69.5
APS 529	700	81 - 86	4100	643	332	211	100	90	304	188	94	133	83.8
APS 530	800	87 - 93	5200	685	360	220	105	95	332	210	99	142	109
APS 531	900	94 - 102	7700	722	375	235	112	101	366	220	110	157	136
APS 533	1000	108 - 115	10500	818	420	270	126	112	405	240	128	180	225.1
APS 540	1200	120 - 128	14000	920	490	290	140	126	450	276	140	200	320


MBL = Minimum Breaking Load | **Mtons =** Metric tonnes

FINISH Hot-dip galvanised | Primer RAL 170 60 45 (for APS 522 - APS 540)

GLOBAL ROPE FITTINGS
AQUALLINE PRODUCTS

CLOSED SPELTER SOCKETS

MORE PRODUCT INFO

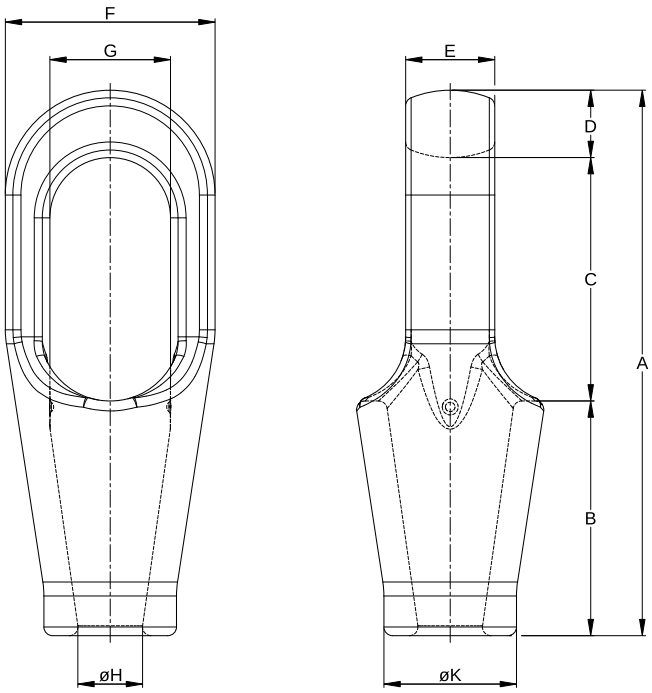

METRIC

MODEL NUMBER	MBL (MTONS)	WIRE ROPE Ø (MM)	STRUCTURAL STRAND Ø (MM)	APPROX. RESIN VOLUME (CC)	DIMENSIONS (MM)									WEIGHT (KG)
					A	B	C	D	E	F	G	ØH	ØK	
CSS 296	8	6 - 7	-	10	102	46	45	11	14	38	22	10	20	0.3
CSS 297	12	8 - 10	-	22	120	54	52	14	17.5	44	24	13.5	26	0.4
CSS 298	20	11 - 13	-	37	140	64	59	17	23	53	30	15	30	0.7
CSS 299	25	14 - 16	12 - 13	54	162	76	65	21	26	67	36	18.5	38.5	1.3
CSS 200	40	18 - 19	14 - 16	91	194	89	78	27	32	77	42	22.5	46	2.1
CSS 201	55	20 - 22	18 - 19	145	224	101	90	33	38	92	50	26.8	55	3.5
CSS 204	80	23 - 26	20 - 22	172	253	114	103	36	45	101	57	29.5	62	5.1
CSS 207	100	27 - 30	24 - 26	224	282	127	116	39	51	114	65	34	70	7.1
CSS 212	130	31 - 36	27 - 28	370	312	139	130	43	57	127	71	40	83	10
CSS 215	160	37 - 39	30 - 32	463	358	152	155	51	63	140	80	44.5	90	14.4
CSS 217	200	40 - 42	33 - 35	549	390	165	171	54	70	148	84	48	97	18.1
CSS 219	250	43 - 48	36 - 40	772	443	190	198	55	76	171	95	53	112	27.2
CSS 222	300	49 - 54	42 - 45	1364	502	216	224	62	82	193	111	58.5	125	32.2
CSS 224	375	55 - 60	46 - 48	1589	550	229	248	73	92	219	125	68.5	135	45.5
CSS 226	450	61 - 68	50 - 54	2040	597	248	270	79	102	241	140	77.5	150	57.3
CSS 227	500	69 - 75	56 - 62	2338	644	279	286	79	124	273	159	83	160	78.5
CSS 228	600	76 - 80	64 - 67	3428	689	305	298	86	133	292	171	89	170	116
CSS 229	650	81 - 86	70 - 73	4392	736	330	311	95	146	311	184	95	180	141.4
CSS 230	750	87 - 93	76 - 80	5586	788	356	330	102	159	330	197	99	200	171.5
CSS 231	900	94 - 102	83 - 92	8187	845	381	356	108	178	362	216	110	215	225
CSS 233	1200	108 - 115	96 - 108	10500	965	440	400	125	190	405	235	128	250	310
CSS 240	1400	120 - 128	112 - 121	14000	1070	490	450	130	205	450	260	143	270	390.2
CSS 245	1750	135 - 140	124 - 130	23370	1165	535	480	165	225	480	270	158	300	500
CSS 250	2000	142 - 153	133 - 143	29930	1380	575	530	180	240	530	300	171	320	675
CSS 260	2500	166 - 178	155 - 160	48694	1470	680	590	200	270	600	340	199	360	875
CSS 265	2800	180 - 191	167 - 179	58605	1565	725	620	220	290	630	360	214	440	1000
CSS 270	3200	192 - 204	180 - 191	72096	1670	775	650	245	305	690	400	230	485	1265

MBL = Minimum Breaking Load | **Mtons =** Metric tonnes


FINISH Hot-dip galvanised | Primer RAL 170 60 45 (for CSS 207 - CSS 270)

GLOBAL ROPE FITTINGS
AQUALLINE PRODUCTS


FAST CONNECTOR SOCKETS


MORE PRODUCT INFO

WITH PIN

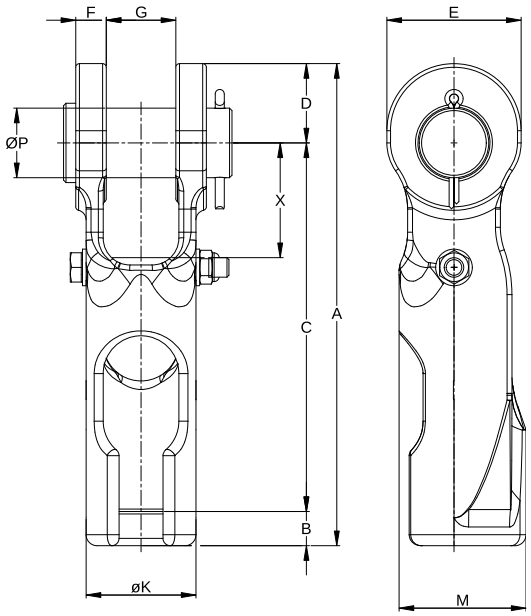

WITH BOLT

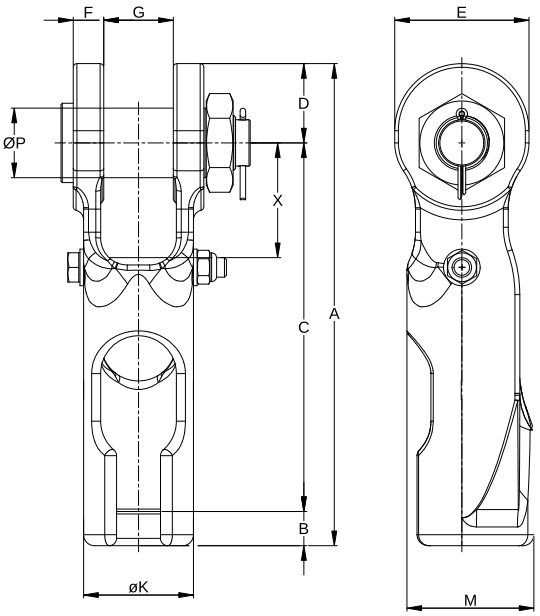

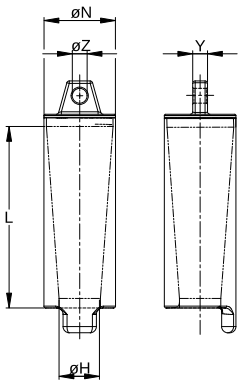

METRIC

MODEL NUMBER	MBL (MTONS)	WIRE ROPE Ø (MM)	APPROX. RESIN VOLUME (CC)	DIMENSIONS (MM)															WEIGHT (KG)
				A	B	C	D	E	F	G	ØH	ØK	L	M	ØN	ØP	X	Y	ØZ	
FCS 701	20	11 - 13	35	190	13	149	28	48	12.5	26	15	40	70	47	26	25	45	8	8	1.7
FCS 702	25	14 - 16	50	227	16	179	32	56	14.5	32	19	50	84	58	32	30	58	8	8	3
FCS 703	40	17 - 19	80	260	18	202	40	68	16.5	38	22	60	98	70	39	35	64	10	10.5	4.6
FCS 704	55	20 - 22	125	303	22	233	48	80	20.5	45	26.5	69	117	80	45	41	82	12	12	7.3
FCS 705	80	23 - 26	160	365	25	282	58	98	22.5	51	29.5	80	138	93	52	51	95	12	12	11.7
FCS 706	100	27 - 29	210	400	28	302	65	110	25	57	33.5	90	157	104	58	57	97	12	12	15.2
FCS 707	120	30 - 32	350	426	30	324	72	124	28	63	36.5	98	170	111	64	63	100	14	12	20
FCS 708	130	34 - 36	425	465	34	356	76	132	28	70	40	102	183	117	68	63	110	16	14	22.6
FCS 709	160	37 - 39	500	502	37	385	80	140	30	76	43	110	207	125	76	70	115	17	17.5	30.8
FCS 710	200	40 - 42	700	550	40	425	85	148	33	76	48	126	230	142	85	76	125	20	20	50
FCS 711	250	43 - 48	1250	620	45	477	98	170	39	89	56	140	260	157	95	89	135	20	20	65
FCS 712	300	49 - 52	1425	685	48	527	108	186	46	101	60	157	285	175	104	95	150	25	23	79.7
FCS 713	375	54 - 58	2000	760	55	593	120	210	53	113	66	170	330	185	118	108	165	25	23	108.3

MBL = Minimum Breaking Load | **Mtons =** Metric tonnes | Assembly weights may vary depending on the selected configuration


FINISH Hot-dip galvanised with zinc-nickel plated components | Primer RAL 170 60 45 (for FCS 704 - FCS 713)


GLOBAL ROPE FITTINGS
AQUALLINE PRODUCTS

MOBILE HARBOUR CRANE SOCKETS


MORE PRODUCT INFO


CLOSED VERSION

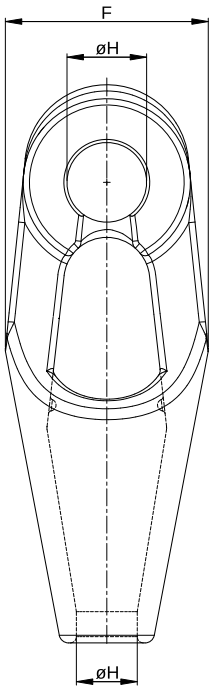

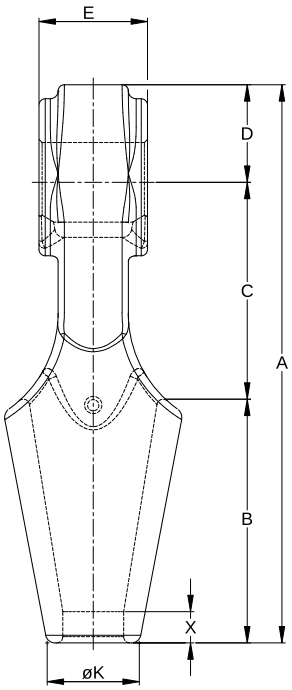

OPEN VERSION WITH BOLT (ROLLER OPTIONAL)

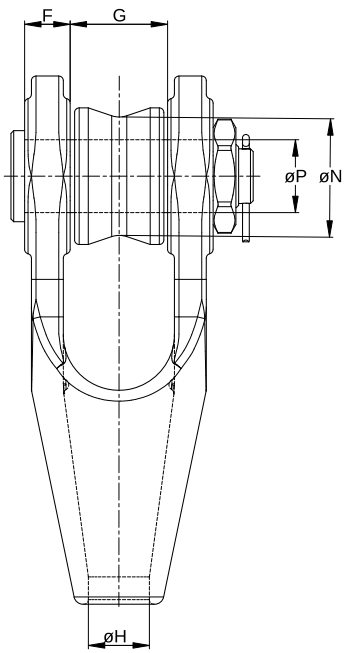

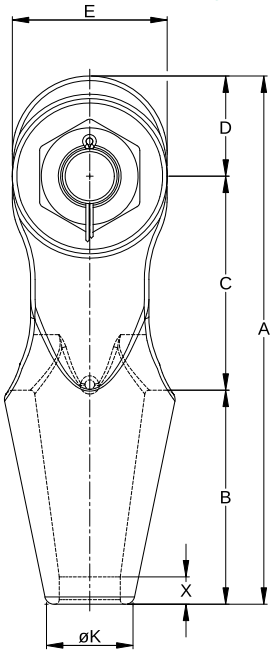

MODEL NUMBER	COMPATIBLE WITH MODEL NUMBER	MBL (MTONS)	WIRE ROPE Ø (MM)	APPROX. RESIN VOLUME (CC)	DIMENSIONS (MM)												WEIGHT (KG)
					A	B	C	D	E	F	G	ØH	ØK	ØN	ØP	X	
CLOSED VERSION																	
MHCS 6-CLOSED	Gottwald 6	125	31 - 34	500	368	155	137	63	67	148	-	42	60	-	-	26	12.5
MHCS 7-CLOSED	Gottwald 7	160	35 - 38	750	415	175	170	70	77	168	-	47	65	-	-	29	19
MHCS 8-CLOSED	Gottwald 8	200	39 - 43	1000	468	198	190	80	87	200	-	52	75	-	-	33	25
MHCS 9-CLOSED	Gottwald 9	280	44 - 54	1500	580	235	235	110	98	215	-	67	95	-	-	30	48
MHCS 10-CLOSED	Gottwald 10	400	55 - 60	2500	630	265	284	120	120	238	-	72	110	-	-	35	65
MHCS 11-CLOSED	Gottwald 11	450	61 - 65	4000	715	312	278	125	139	260	-	78	118	-	-	40	85
OPEN VERSION																	
MHCS 6-OPEN	Gottwald 6	125	31 - 34	500	365	155	150	60	110	37	70	42	60	80	55	20	16.8
MHCS 7-OPEN	Gottwald 7	160	35 - 38	750	415	175	170	75	130	41	80	47	65	95	60	23	25
MHCS 8-OPEN	Gottwald 8	200	39 - 43	1000	476	198	190	88	136	46	90	52	75	100	70	25	34.1
MHCS 9-OPEN	Gottwald 9	280	46 - 54	1500	580	235	235	110	170	50	106	67	95	130	80	30	58.9
MHCS 10-OPEN	Gottwald 10	400	55 - 60	2500	630	265	245	120	190	54	126	72	110	O.R.	90	35	72
MHCS 11-OPEN	Gottwald 11	450	61 - 65	4000	705	312	285	125	200	56	144	78	118	O.R.	100	40	93

METRIC

MBL = Minimum Breaking Load | **Mtons =** Metric tonnes | Assembly weights may vary depending on the selected configuration


FINISH Hot-dip galvanised with zinc-nickel plated components I Primer RAL 170 60 45

GLOBAL ROPE FITTINGS
AQUALLINE PRODUCTS

OPEN DIN SOCKETS

MORE PRODUCT INFO

WITH BOLT

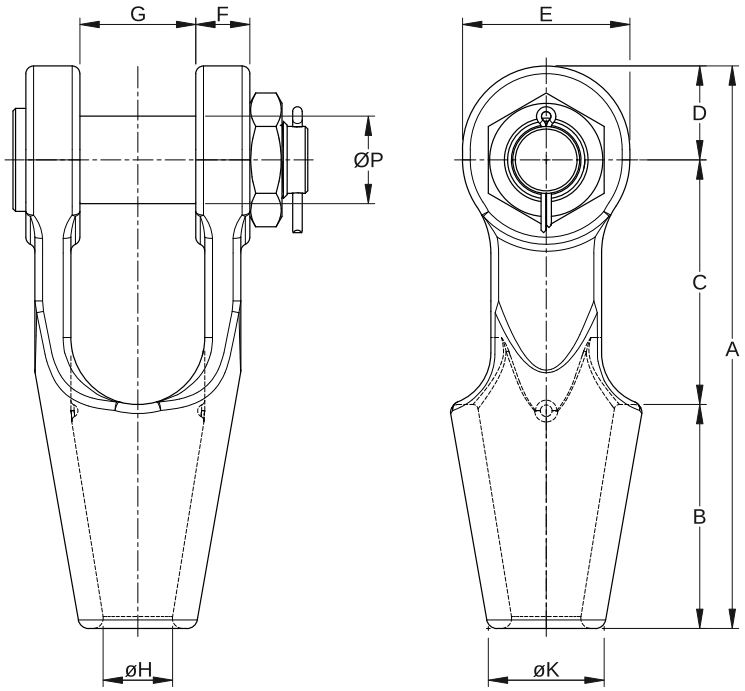

METRIC

MODEL NUMBER	MBL (MTONS)	WIRE ROPE Ø (MM)	APPROX. RESIN VOLUME (CC)	DIMENSIONS (MM)										WEIGHT (KG)
				A	B	C	D	E	F	G	ØH	ØK	ØP	
ODS 1.6	12	12 - 14	30	149	60	65	24	44	14	27	17	32	20	1.2
ODS 2.5	20	14 - 18	50	177	69	79	29	52	16	33	20	38	24	2.1
ODS 3	25	16 - 20	80	198	78	87	33	58	18	38	23	43	27	2.7
ODS 4	30	18 - 22	100	215	84	96	35	62	20	42	25	46	30	3.5
ODS 5	40	20 - 24	125	242	94	106	42	74	23	47	27	50	36	5.1
ODS 6	50	22 - 28	150	265	106	114	45	80	25	53	30	54	39	6.4
ODS 8	60	26 - 30	200	292	115	127	50	90	27	60	33	60	45	8.9
ODS 10	70	28 - 34	270	321	125	140	56	100	29	66	36	65	48	11.8
ODS 12	80	32 - 38	400	354	140	156	58	104	33	73	40	70	52	14.6
ODS 16	120	36 - 42	600	399	159	173	67	120	36	81	45	80	60	21.7
ODS 20	160	40 - 44	750	437	174	190	73	130	42	90	51	90	68	32.2
ODS 25	200	44 - 48	1000	488	190	215	83	150	63	100	55	100	72	47.5
ODS 32	250	50 - 54	1400	525	209	231	95	170	70	110	65	118	80	63.5
ODS 40	320	58 - 64	2000	596	237	263	107	190	79	125	75	132	90	80
ODS 50	400	62 - 68	2700	658	262	288	110	200	84	140	80	150	100	113

MBL = Minimum Breaking Load | **Mtons =** Metric tonnes


FINISH Hot-dip galvanised with zinc-nickel plated components | Primer RAL 170 60 45 (for ODS 10 - ODS 50)

GLOBAL ROPE FITTINGS
AQUALLINE PRODUCTS

OPEN JIS SOCKETS

MORE PRODUCT INFO

WITH BOLT

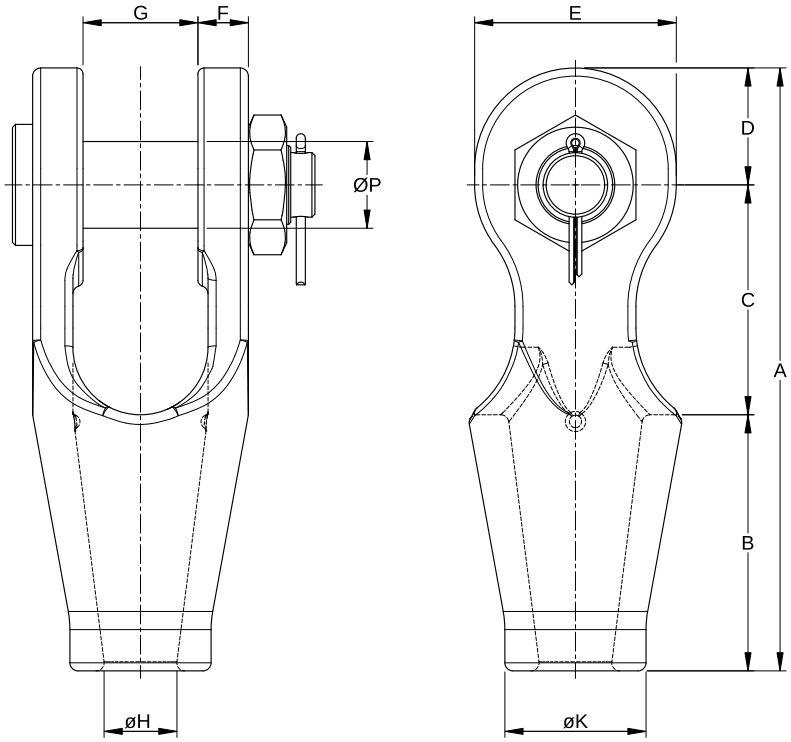

MODEL NUMBER	MBL (MTONS)	WIRE ROPE Ø (MM)	APPROX. RESIN VOLUME (CC)	DIMENSIONS (MM)										WEIGHT (KG)
				A	B	C	D	E	F	G	ØH	ØK	ØP	
OJS 16	24	15 - 16	50	183	76	75	32	56	13	32	20	39	25	1.9
OJS 18	30	17 - 18	80	207	89	80	38	64	15	38	23	45	28	2.8
OJS 20	36	19 - 20	125	220	95	85	40	70	16.5	42	25	48	31	3.6
OJS 22	40	21 - 22	160	235	101	89	45	80	20.5	45	30	58	34	5.2
OJS 24	48	23 - 24	175	264	114	101	49	86	22.5	51	32	62	37	6.7
OJS 25	60	25 - 26	200	276	120	105	51	90	22.5	51	34	65	40	7.4
OJS 28	72	27 - 28	230	299	127	114	58	100	25	57	36	70	43	10.1
OJS 30	80	29 - 30	300	313	135	118	60	104	25	57	38	75	46	11
OJS 32	90	31 - 32	350	331	139	127	65	110	28	63	41	83	49	14.2
OJS 34	100	33 - 34	400	347	150	130	67	114	28	63	43	83	52	15
OJS 36	110	35 - 36	450	370	160	138	72	124	30	70	45	90	55	18.8
OJS 38	120	37 - 38	500	389	170	145	74	128	30	72	47	90	58	20.1
OJS 40	135	39 - 40	600	406	175	155	76	130	33.5	76	50	97	61	25
OJS 42	150	41 - 43	700	430	191	160	79	136	39	80	53	100	65	31

METRIC


MBL = Minimum Breaking Load | **Mtons =** Metric tonnes


FINISH Hot-dip galvanised with zinc-nickel plated components

OPEN SPELTER SOCKETS


MORE PRODUCT INFO


WITH PIN

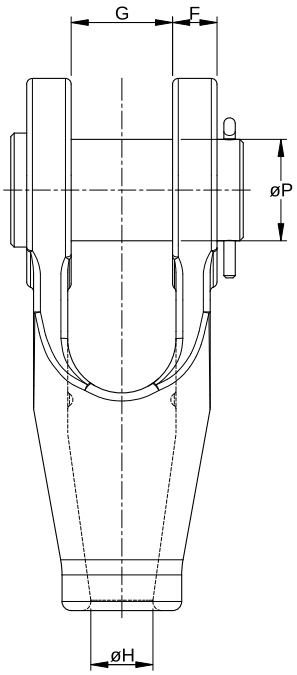

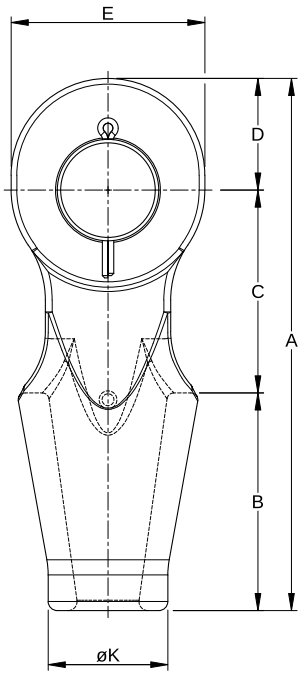

WITH BOLT

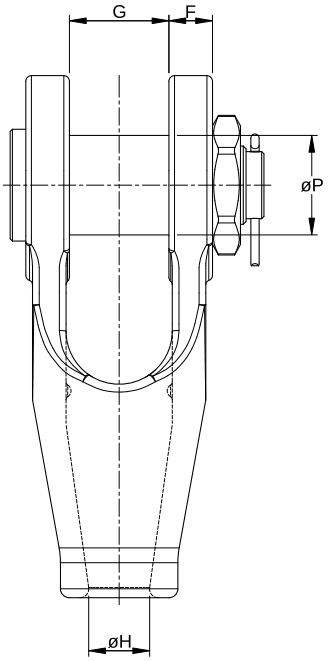

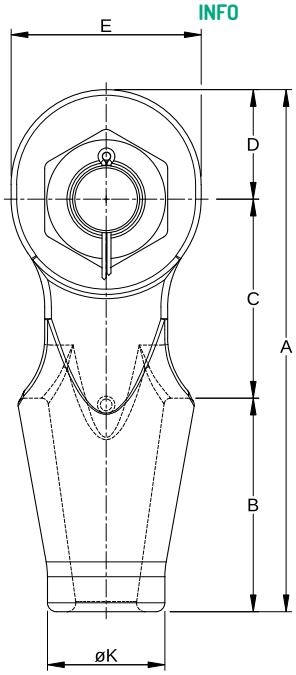

METRIC

MODEL NUMBER	MBL (MTONS)	WIRE ROPE Ø (MM)	STRUCTURAL STRAND Ø (MM)	APPROX. RESIN VOLUME (CC)	DIMENSIONS (MM)										WEIGHT (KG)
					A	B	C	D	E	F	G	ØH	ØK	ØP	
OSS 196	8	6 - 7	-	10	105	46	40	19	34	9	18	10	20	17.5	0.6
OSS 197	12	8 - 10	-	23	122	54	45	23	40	11.2	20.6	13.5	26	20.6	0.9
OSS 198	20	11 - 13	-	37	142	64	51	27	48	12.7	25.6	15	30	25.4	1.3
OSS 199	25	14 - 16	12 - 13	52	171	76	63	32	56	14.5	32	18.5	38.5	30	2
OSS 100	40	18 - 19	14 - 16	91	205	89	76	40	68	16.5	38	22.5	46	35	3.3
OSS 104	55	20 - 22	18 - 19	145	238	101	89	48	80	20.5	45	26.8	55	41	5.4
OSS 108	80	23 - 26	20 - 22	172	273	114	101	58	98	22.5	51	29.5	62	51	8.3
OSS 111	100	27 - 30	24 - 26	224	306	127	114	65	110	25	57	34	70	57	11
OSS 115	130	31 - 36	27 - 28	370	338	139	127	72	124	28	63	40	83	63	16.3
OSS 118	160	37 - 39	30 - 32	462	394	152	162	80	140	30	76	44.5	90	70	23.2
OSS 120	200	40 - 42	33 - 35	549	415	165	165	85	148	33.5	76	48	97	76	28.9
OSS 125	250	43 - 48	36 - 40	783	467	191	178	98	170	39	89	53	112	89	39.3
OSS 128	300	49 - 54	42 - 45	1364	552	216	228	108	186	46	101	58.5	125	95	55.3
OSS 130	375	55 - 60	46 - 48	1538	603	229	254	120	210	53	113	68.5	135	108	76.5
OSS 132	450	61 - 68	50 - 54	2040	654	248	273	133	230	60	127	77.5	150	121	103.9
OSS 135	500	69 - 75	56 - 62	2338	696	279	279	138	240	73	133	83	160	127	134
OSS 138	600	76 - 80	64 - 67	3428	736	305	286	145	250	76	146	89	170	133	157.7
OSS 140	650	81 - 86	70 - 73	4392	790	330	300	160	275	79	159	95	180	140	197.4
OSS 142	750	87 - 93	76 - 80	5554	849	356	318	175	300	82	172	99	200	152	246.8
OSS 144	900	94 - 102	88 - 96	8219	922	381	343	198	336	89	191	110	215	178	335
OSS 145	1000	103 - 108	98 - 102	9000	995	406	381	208	356	95	203	118	240	185	461
OSS 146	1200	108 - 115	104 - 111	10500	1110	440	450	220	370	100	205	128	250	195	529
OSS 150	1400	120 - 138	112 - 121	14000	1185	490	440	255	430	113	225	143	270	220	701.7
OSS 155	1700	135 - 140	124 - 130	23587	1255	535	460	260	440	120	240	158	300	240	778
OSS 160	2000	142 - 153	133 - 143	30657	1365	585	505	275	500	140	250	172	330	255	879
OSS 165	2250	154 - 165	144 - 154	38556	1460	630	530	300	550	150	260	186	360	275	1080
OSS 170	2500	166 - 178	155 - 166	48234	1560	680	570	310	570	150	280	200	400	295	1225
OSS 175	2800	180 - 191	167 - 179	58605	1650	725	600	625	600	155	300	214	440	310	1430
OSS 180	3200	192 - 204	180 - 191	72096	1740	775	620	345	640	160	320	230	485	330	1680


MBL = Minimum Breaking Load | **Mtons =** Metric tonnes | Assembly weights may vary depending on the selected configuration

FINISH Hot-dip galvanised with zinc-nickel plated components | Primer RAL 170 60 45 (for OSS 111 - OSS 180)

GLOBAL ROPE FITTINGS
AQUALLINE PRODUCTS

OPEN STRAND SPELTER SOCKETS

MORE PRODUCT INFO

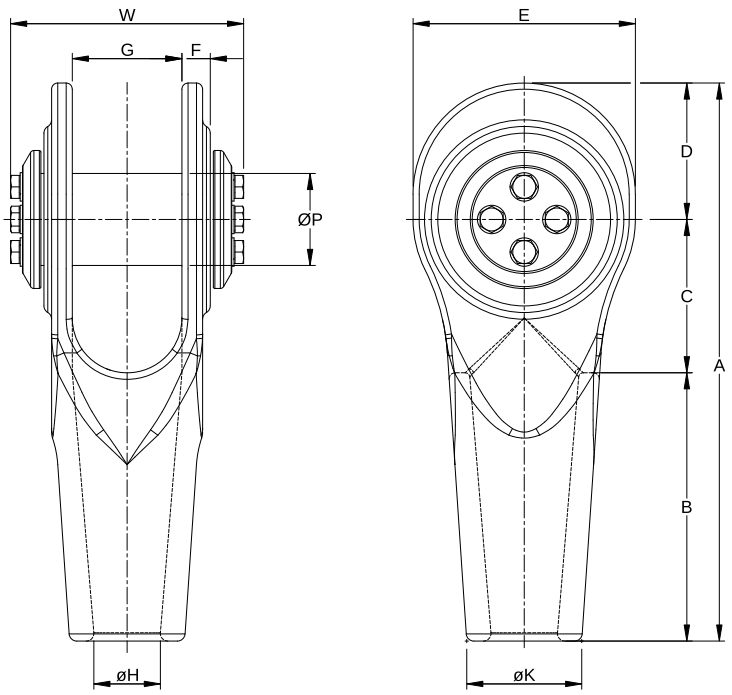

METRIC

MODEL NUMBER	MBL (MTONS)	STRUCTURAL STRAND Ø (MM)	APPROX. RESIN VOLUME (CC)	DIMENSIONS (MM)											WEIGHT (KG)
				A	B	C	D	E	F	G	ØH	ØK	ØP	W	
OSSS 420	50	20	100	225	100	70	55	90	12.5	46	27	48	40	120	3.5
OSSS 425	70	25	160	275	125	80	66	110	14.5	57	32	57	45	135	6
OSSS 430	100	30	220	318	150	90	78	130	17.5	68	37	66	55	160	10
OSSS 435	125	35	400	355	175	95	85	140	19.5	74	44	78	60	175	15
OSSS 440	175	40	800	395	200	105	95	160	22	84	49	86	65	185	18
OSSS 445	225	45	1200	446	225	115	106	176	24	92	57	98	75	210	27
OSSS 450	280	50	1600	503	250	130	123	200	26	104	62	108	85	230	35
OSSS 455	360	55	2000	560	275	150	135	220	28	112	67	116	90	250	52
OSSS 460	450	60	2500	613	300	165	148	240	30	124	74	130	100	265	70
OSSS 465	500	65	3000	675	325	185	165	270	33	132	80	140	110	280	86
OSSS 470	560	70	4000	728	350	200	178	290	37	143	87	150	120	300	110
OSSS 475	600	75	5000	785	375	220	190	310	39	158	92	162	130	340	160
OSSS 480	700	80	6000	838	400	235	203	330	45	168	98	173	140	360	190
OSSS 485	800	85	7000	895	420	260	215	350	51	178	104	188	145	400	230
OSSS 490	900	90	8000	950	440	275	235	380	57	190	111	208	154	425	275
OSSS 495	1000	95	9000	1040	450	330	260	410	62	198	120	255	164	450	350

MBL = Minimum Breaking Load | **Mtons =** Metric tonnes


FINISH Hot-dip galvanised with zinc-nickel plated components | Primer RAL 170 60 45

GLOBAL ROPE FITTINGS
AQUALLINE PRODUCTS

UNIVERSAL CONNECTOR SOCKETS

MORE PRODUCT INFO

WITH BOLT

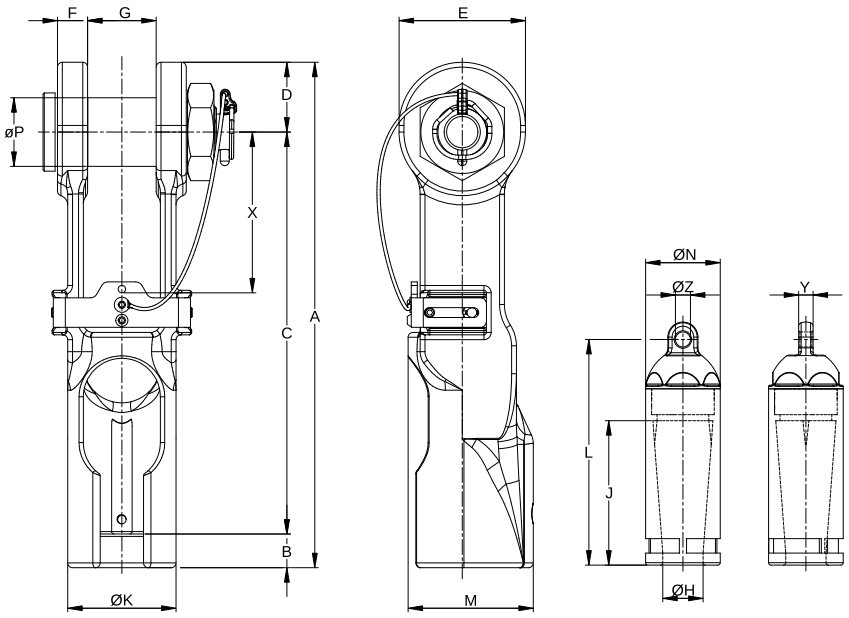

METRIC


MODEL NUMBER	MBL (MTONS)	WIRE ROPE Ø (MM)	APPROX. RESIN VOLUME (CC)	DIMENSIONS (MM)																	WEIGHT (KG)
				A	B	C	D	E	F	G	ØH	J	ØK	L	M	ØN	ØP	X	Y	ØZ	
UCS 902	25	13 -16	50	235	16	189	30	56	14.5	32	19	89	50	113	58	33.5	30	67	8	8	2.7
UCS 903	40	17 - 19	80	273	18	220	36	65	16.5	40	22	100	60	126	70	39	35	85	10	10.5	4.5
UCS 904	55	20 - 22	125	322	22	258	42	78	20.5	48	26.5	112	69	144	80	45	41	104	12	12	7.5
UCS 905	80	23 - 26	160	382	25	305	52	96	22.5	58	29.5	134	80	171	93	53	51	124	12	12	12.1
UCS 906	100	27 - 29	210	420	28	334	58	105	25	65	33.5	147	90	188	104	62	57	145	12	12	16.1


MBL = Minimum Breaking Load | **Mtons =** Metric tonnes

FINISH Zinc-nickel plated with additional primer RAL 170 60 45 on connector tube

CLOSED WEDGE SOCKETS

MORE PRODUCT INFO

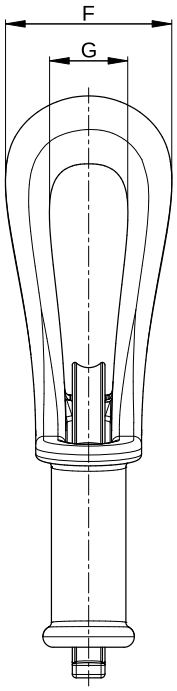

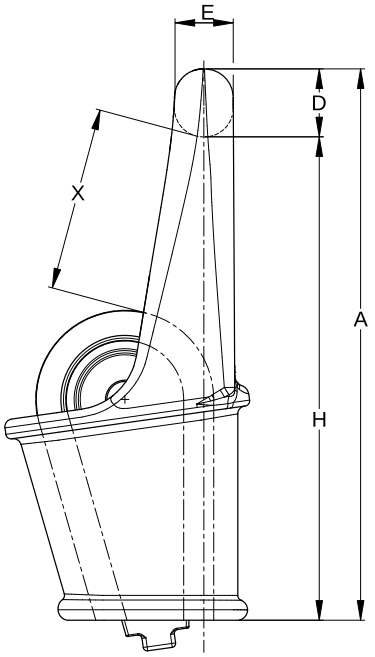

METRIC

MODEL NUMBER	MBL (MTONS)	WIRE ROPE Ø (MM)	DIMENSIONS (MM)							WEIGHT (KG)
			A	D	E	F	G	H	X	
CWS 303	40	17 - 19	317	40	36	100	42	277	100	7.5
CWS 304	55	20 - 22	368	45	40	115	50	323	110	11.5
CWS 305	80	23 - 26	422	52	45	130	60	370	125	17.4
CWS 306	100	27 - 29	473	58	50	150	65	415	140	38.7
CWS 307	120	30 - 32	519	62	55	160	72	457	160	46.2
CWS 308	130	34 - 36	580	66	60	168	76	514	175	38.4
CWS 309	160	37 - 39	620	72	66	175	82	548	190	49
CWS 310	200	40 - 42	665	80	72	195	90	585	210	62.7
CWS 311	250	43 - 48	750	90	80	220	100	660	240	93
CWS 312	300	49 - 52	820	100	90	242	110	720	260	118
CWS 313	375	54 - 58	890	106	95	255	120	784	280	170
CWS 314	450	60 - 68	1045	120	105	280	130	925	330	240
CWS 315	600	72 - 76	1200	140	120	330	150	1060	400	380
CWS 316	650	81 - 86	1340	155	130	375	170	1185	475	490

MBL = Minimum Breaking Load | **Mtons =** Metric tonnes | **X =** Depending on the actual wire rope diameter, rope construction and fill factor


FINISH Hot-dip galvanised | Primer RAL 170 60 45

GLOBAL ROPE FITTINGS
AQUALLINE PRODUCTS


OPEN WEDGE SOCKETS

MORE PRODUCT INFO

WITH PIN

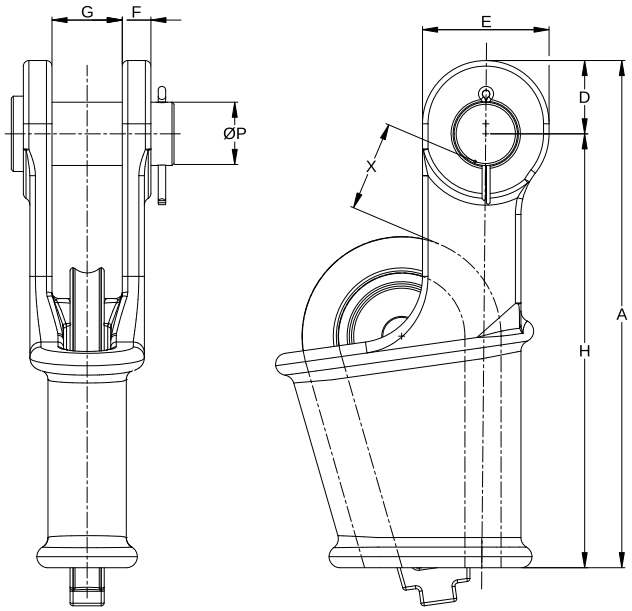

WITH BOLT

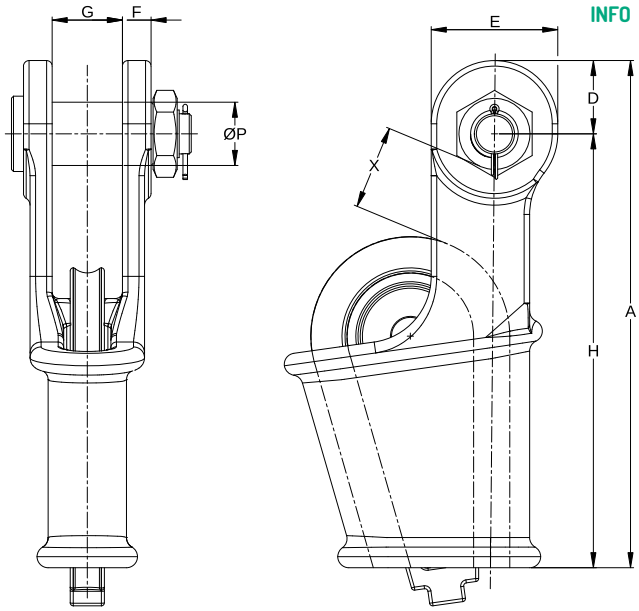

METRIC

MODEL NUMBER	MBL (MTONS)	WIRE ROPE Ø (MM)	DIMENSIONS (MM)								WEIGHT (KG)
			A	D	E	F	G	H	ØP	X	
OWS 0.15	5	5 - 6	101	17	30	8	17	84	16	35	0.4
OWS 0.25	8	7 - 8	130	20	34	9	18	110	17.5	40	0.8
OWS 0.5	12	9 - 10	150	23	40	11	20.5	125	20.6	45	1.4
OWS 1	20	11 - 13	183	27	48	12.7	25.6	156	25.4	60	2.4
OWS 2	25	14 - 16	224	32	56	14.5	32	192	30	65	3.8
OWS 3	40	17 - 19	272	40	68	16.5	38	232	35	70	6.4
OWS 4	55	20 - 22	312	48	80	20.5	45	264	41	80	9.8
OWS 5	80	23 - 26	370	58	100	22.5	51	312	51	90	14.8
OWS 6	100	27 - 29	413	65	110	25	57	348	57	100	21.8
OWS 7	120	30 - 32	455	72	124	28	63	384	63	110	30.5
OWS 8	130	34 - 36	508	76	132	28	70	432	63	125	37.7
OWS 9	160	37 - 39	548	80	140	30	76	468	70	140	49.5
OWS 10	200	40 - 42	589	85	150	33	76	504	76	155	62.5
OWS 11	250	43 - 48	674	98	170	39	89	576	89	175	94.1
OWS 12	300	49 - 52	733	108	186	46	101	625	95	195	121
OWS 13	375	54 - 58	816	120	210	53	113	696	108	220	168
OWS 14	450	60 - 68	950	133	230	60	127	817	121	250	294
OWS 15	600	72 - 76	1057	145	250	76	146	912	133	280	375.8
OWS 16	650	81 - 86	1160	160	275	79	159	1000	140	330	463.6
OWS 17	750	88 - 90	1272	180	310	85	175	1100	155	375	650
OWS 18	900	92 - 95	1400	200	350	90	191	1200	178	426	918

MBL = Minimum Breaking Load | **Mtons =** Metric tonnes | **X =** Depending on the actual wire rope diameter, rope construction and fill factor
Assembly weights may vary depending on the selected configuration


FINISH Hot-dip galvanised with zinc-nickel plated components | Primer RAL 170 60 45 (for OWS 4 - OWS 18)


GLOBAL ROPE FITTINGS
AQUALLINE PRODUCTS

OPEN WEDGE SOCKETS WITH INTEGRATED TAIL CLAMP


MORE PRODUCT INFO


WITH PIN

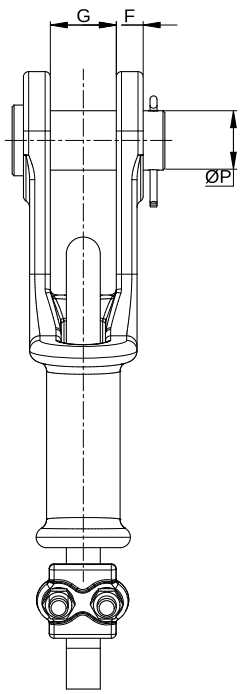

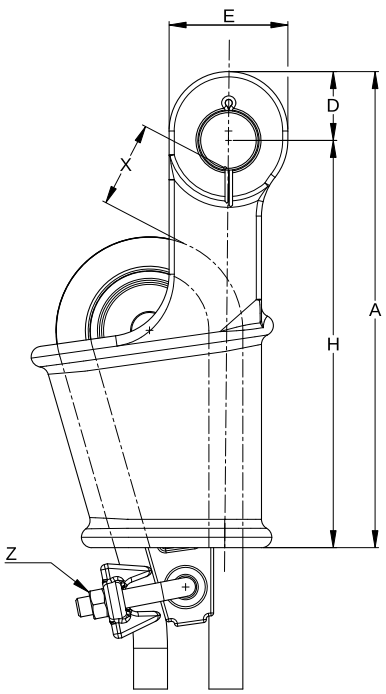

WITH BOLT

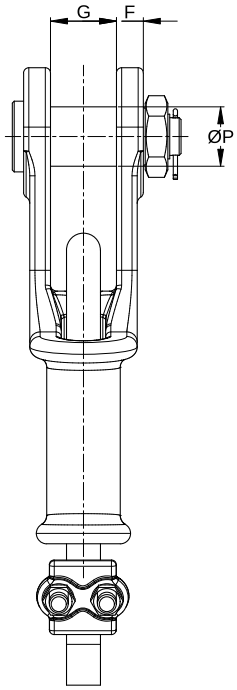

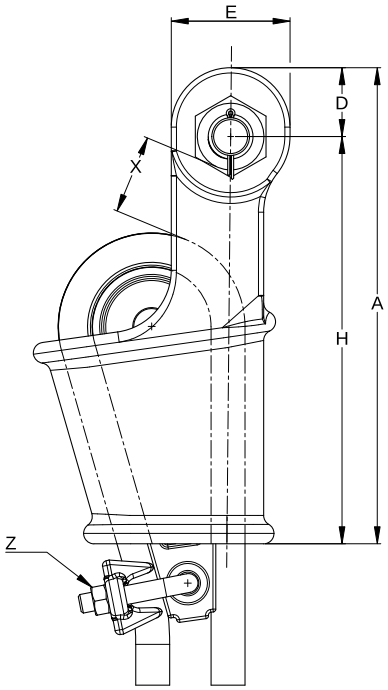

METRIC

MODEL NUMBER	MBL (MTONS)	WIRE ROPE Ø (MM)	DIMENSIONS (MM)								WIRE ROPE CLIP SIZE	WEIGHT (KG)
			A	D	E	F	G	H	ØP	X	Z	
OWS ITC 0.15	5	5 - 6	101	17	30	8	17	84	16	35	WRC 5	0.6
OWS ITC 0.25	8	7 - 8	130	20	34	9	18	110	17.5	40	WRC 8	1
OWS ITC 0.5	12	9 - 10	150	23	40	11	20.5	125	20.6	45	WRC 10	1.7
OWS ITC 1	20	11 - 13	183	27	48	12.7	25.6	156	25.4	60	WRC 13	2.8
OWS ITC 2	25	14 - 16	224	32	56	14.5	32	192	30	65	WRC 16	4.4
OWS ITC 3	40	17 - 19	272	40	68	16.5	38	232	35	70	WRC 19	7.2
OWS ITC 4	55	20 - 22	312	48	80	20.5	45	264	41	80	WRC 22	11
OWS ITC 5	80	23 - 26	370	58	100	22.5	51	312	51	90	WRC 26	16.2
OWS ITC 6	100	27 - 29	413	65	110	25	57	348	57	100	WRC 29	23.1
OWS ITC 7	120	30 - 32	455	72	124	28	63	384	63	110	WRC 32	33.1
OWS ITC 8	130	34 - 36	508	76	132	28	70	432	63	125	WRC 35	40.4


MBL = Minimum Breaking Load | **Mtons =** Metric tonnes | **X =** Depending on the actual wire rope diameter, rope construction and fill factor
Assembly weights may vary depending on the selected configuration

FINISH Hot-dip galvanised with zinc-nickel plated components | Primer RAL 170 60 45 (for OWS ITC 4 - OWS ITC 8)

GLOBAL ROPE FITTINGS
AQUALLINE PRODUCTS

ADJUSTABLE CLOSED TURNBUCKLE SOCKETS

MORE PRODUCT INFO

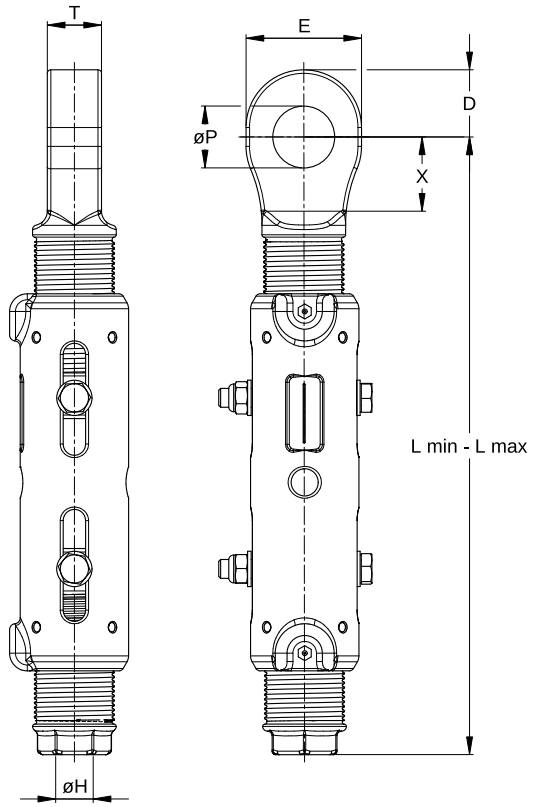

METRIC

MODEL NUMBER	MBL (MTONS)	WIRE ROPE Ø (MM)	APPROX. RESIN VOLUME (CC)	DIMENSIONS (MM)									WEIGHT (KG)
				D	E	ØH	ØP	T	X	L MIN	L MAX	ADJUSTMENT RANGE	
ACTS 800	40	18 - 19	80	40	68	22.5	36.5	34	55	335	445	110	7.7
ACTS 804	55	20 - 22	125	48	80	26.8	42.5	40	60	380	510	130	11
ACTS 808	80	23 - 26	160	58	98	29.5	53	45	75	435	585	150	15.6
ACTS 811	100	27 - 30	210	64	108	34	59	52	85	490	660	170	23.5
ACTS 815	130	31 - 36	350	72	124	40	65	58	100	585	775	190	31.8
ACTS 818	160	37 - 39	425	83	140	44.5	72	76	105	630	830	200	45
ACTS 820	200	40 - 42	500	85	148	48	78	76	115	680	900	220	60
ACTS 825	250	43 - 48	700	98	170	53	91	82	135	810	1060	250	88


MBL = Minimum Breaking Load | **Mtons =** Metric tonnes

FINISH Zinc-nickel plated with additional primer RAL 170 60 45 on connector tube


ADJUSTABLE OPEN TURNBUCKLE SOCKETS

MORE PRODUCT INFO

WITH PIN

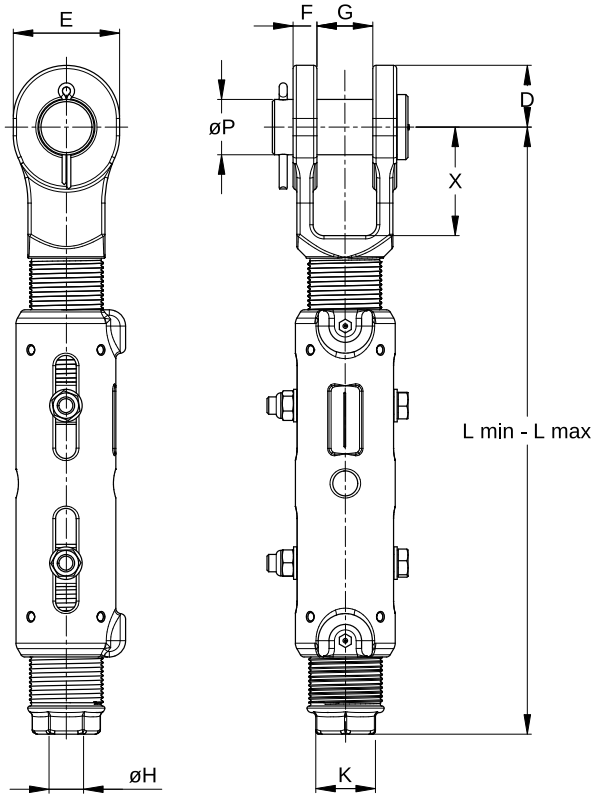

WITH BOLT

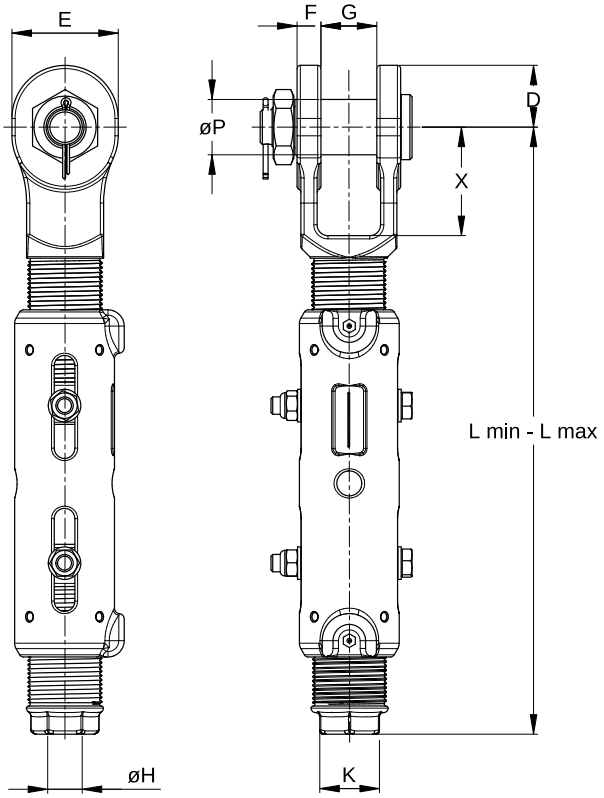

METRIC

MODEL NUMBER	MBL (MTONS)	WIRE ROPE Ø (MM)	APPROX. RESIN VOLUME (CC)	DIMENSIONS (MM)											WEIGHT (KG)
				D	E	F	G	ØH	K	ØP	X	L MIN	L MAX	ADJUSTMENT RANGE	
AOTS 800	40	18 - 19	80	45	74	16.5	38	22.5	41	35	55	340	450	110	8.7
AOTS 804	55	20 - 22	125	53	90	20.5	45	26.8	50	41	62	390	520	130	10.6
AOTS 808	80	23 - 26	160	57	98	22.5	51	29.5	55	51	100	465	640	175	17.3
AOTS 811	100	27 - 30	210	67	114	25	57	34	65	57	85	505	705	200	23.22
AOTS 815	130	31 - 36	350	77	135	28	63	40	75	63	95	600	790	190	38.4
AOTS 818	160	37 - 39	425	83	146	30	76	44.5	80	70	105	650	850	200	46
AOTS 820	200	40 - 42	500	89	156	33	76	48	90	76	115	700	920	220	58
AOTS 825	250	43 - 48	700	102	178	39	89	53	100	89	135	825	1075	250	86

MBL = Minimum Breaking Load | **Mtons =** Metric tonnes | Assembly weights may vary depending on the selected configuration


FINISH Zinc-nickel plated with additional primer RAL 170 60 45 on connector tube

GLOBAL ROPE FITTINGS
AQUALLINE PRODUCTS


ADJUSTABLE OPEN SPELTER SOCKETS

MORE PRODUCT INFO

WITH PIN

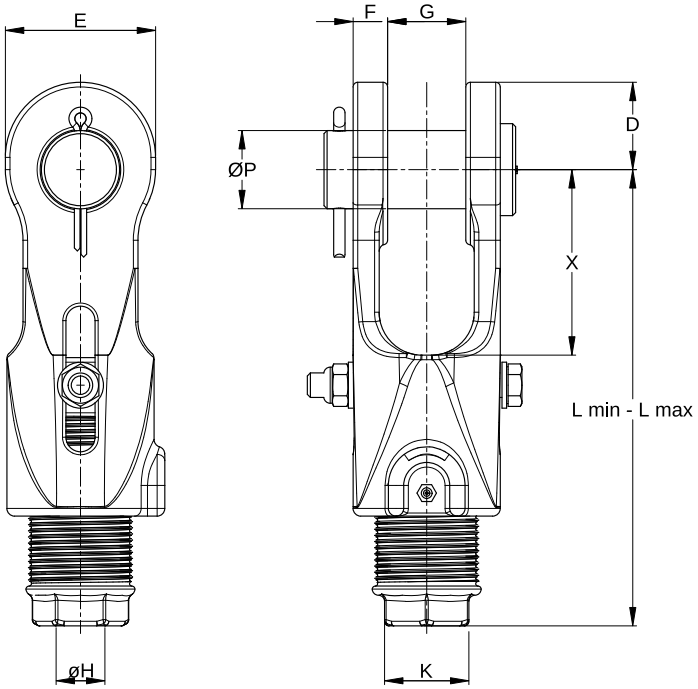

WITH BOLT

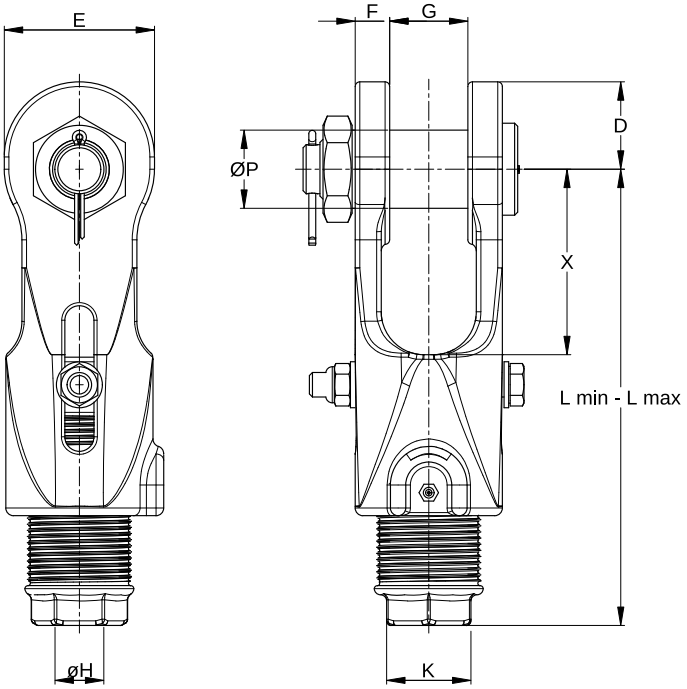

METRIC

MODEL NUMBER	MBL (MTONS)	WIRE ROPE Ø (MM)	APPROX. RESIN VOLUME (CC)	DIMENSIONS (MM)											WEIGHT (KG)
				D	E	F	G	ØH	K	ØP	X	L MIN	L MAX	ADJUSTMENT RANGE	
AOSS 800	40	18 - 19	80	45	74	16.5	38	22.5	41	35	90	185	240	55	5
AOSS 804	55	20 - 22	125	53	90	20.5	45	26.8	50	41	100	207	272	65	8
AOSS 808	80	23 - 26	160	57	98	22.5	51	29.5	55	51	120	245	320	75	12
AOSS 811	100	27 - 30	210	67	114	25	57	34	65	57	130	280	380	100	17
AOSS 815	130	31 - 36	350	77	135	28	63	40	75	63	150	325	415	90	23
AOSS 818	160	37 - 39	425	83	146	30	76	44.5	80	70	170	370	470	100	33
AOSS 820	200	40 - 42	500	89	156	33	76	48	90	76	180	400	510	110	40
AOSS 825	250	43 - 48	700	102	178	39	89	53	100	89	215	485	605	120	60


MBL = Minimum Breaking Load | **Mtons =** Metric tonnes | Assembly weights may vary depending on the selected configuration

FINISH Hot-dip galvanised with zinc-nickel plated components

GLOBAL ROPE FITTINGS
AQUALLINE PRODUCTS

TURNBUCKLES
EYE-EYE

MORE PRODUCT INFO

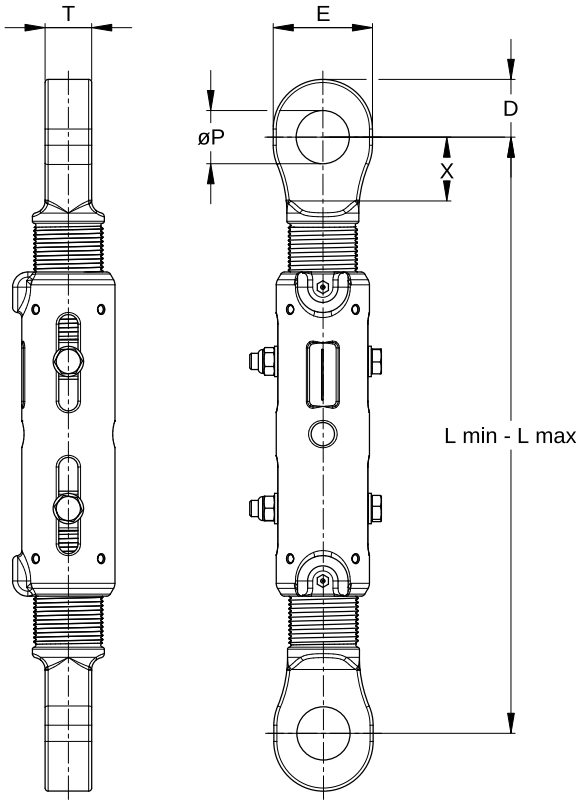

METRIC

MODEL NUMBER	WLL (MTONS)	MBL (MTONS)	DIMENSIONS (MM)								WEIGHT (KG)
			D	E	L MIN	L MAX	ADJUSTMENT RANGE	ØP	T	X	
TBL 800-EE	8	40	40	68	390	500	110	35	34	55	8.7
TBL 804-EE	11	55	48	80	435	565	130	41	40	60	13
TBL 808-EE	16	80	58	98	500	650	150	51	45	75	19.1
TBL 811-EE	20	100	64	108	550	750	200	57	52	85	28
TBL 815-EE	26	130	72	124	660	850	190	63	63	100	38
TBL 818-EE	32	160	83	140	720	920	200	70	76	105	48
TBL 820-EE	40	200	85	148	775	995	220	76	76	115	60
TBL 825-EE	50	250	98	170	920	1170	250	89	82	135	85


WLL = Working Load Limit | **MBL =** Minimum Breaking Load | **Mtons =** Metric tonnes

FINISH Zinc-nickel plated with additional primer RAL 170 60 45 on connector tube


TURNBUCKLES
EYE-JAW

MORE PRODUCT INFO

WITH PIN

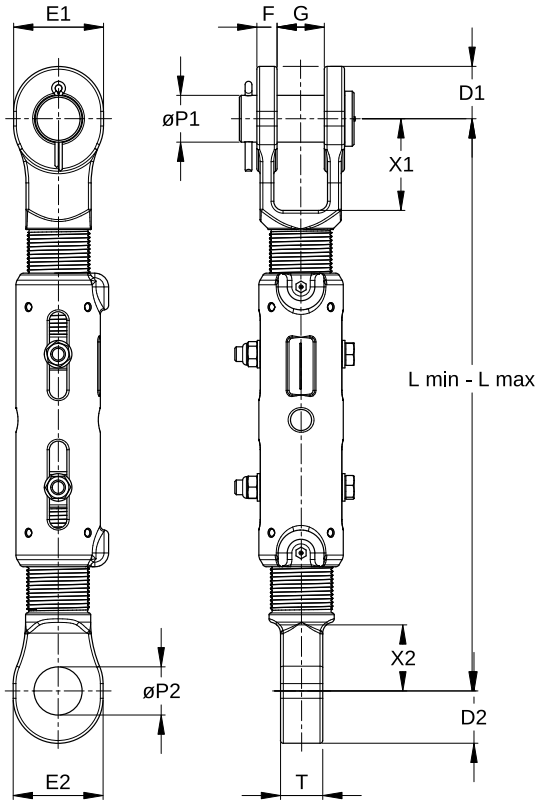

WITH BOLT

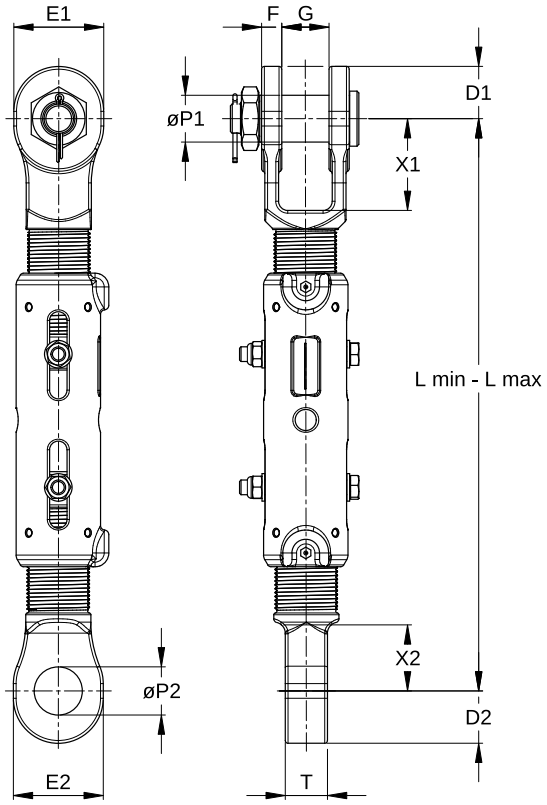

METRIC

MODEL NUMBER	WLL (MTONS)	MBL (MTONS)	DIMENSIONS (MM)														WEIGHT (KG)
			D1	E1	F	G	ØP1	X1	L MIN	L MAX	ADJUSTMENT RANGE	D2	E2	ØP2	X2	T	
TBL 800-EJ	8	40	45	74	16.5	38	35	55	410	520	110	40	68	35	55	34	9
TBL 804-EJ	11	55	53	90	20.5	45	41	62	460	590	130	48	80	41	60	40	15
TBL 808-EJ	16	80	64	108	22.5	51	51	100	530	680	150	58	98	51	75	45	19.7
TBL 811-EJ	20	100	67	114	25	57	57	85	600	800	200	64	108	57	85	52	28.4
TBL 815-EJ	26	130	77	135	28	63	63	95	670	860	190	72	124	63	100	63	41
TBL 818-EJ	32	160	83	146	30	76	70	105	735	935	200	83	140	70	105	76	55
TBL 820-EJ	40	200	89	156	33	76	76	115	790	1010	220	85	148	76	115	76	70
TBL 825-EJ	50	250	102	178	39	89	89	135	935	1185	250	98	170	89	135	82	95

WLL = Working Load Limit | **MBL =** Minimum Breaking Load | **Mtons =** Metric tonnes
Assembly weights may vary depending on the selected configuration


FINISH Zinc-nickel plated with additional primer RAL 170 60 45 on connector tube

GLOBAL ROPE FITTINGS
AQUALLINE PRODUCTS


TURNBUCKLES
JAW-JAW

MORE PRODUCT INFO

WITH PIN

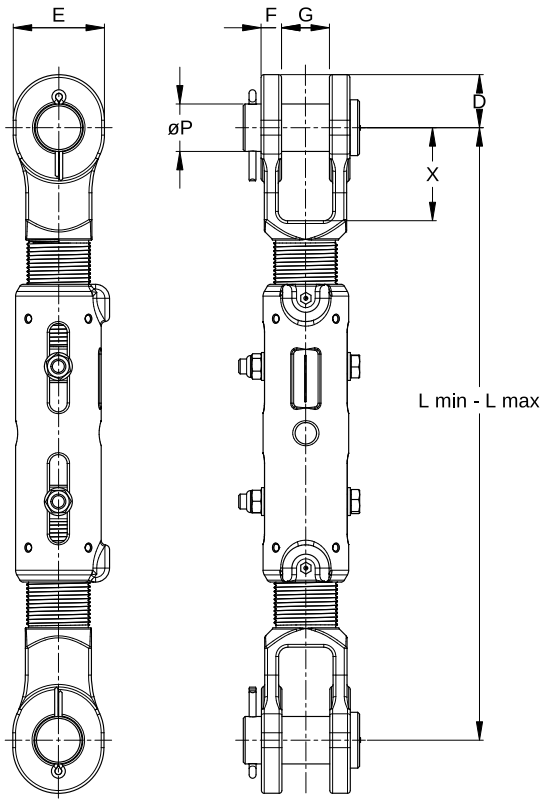

WITH BOLT

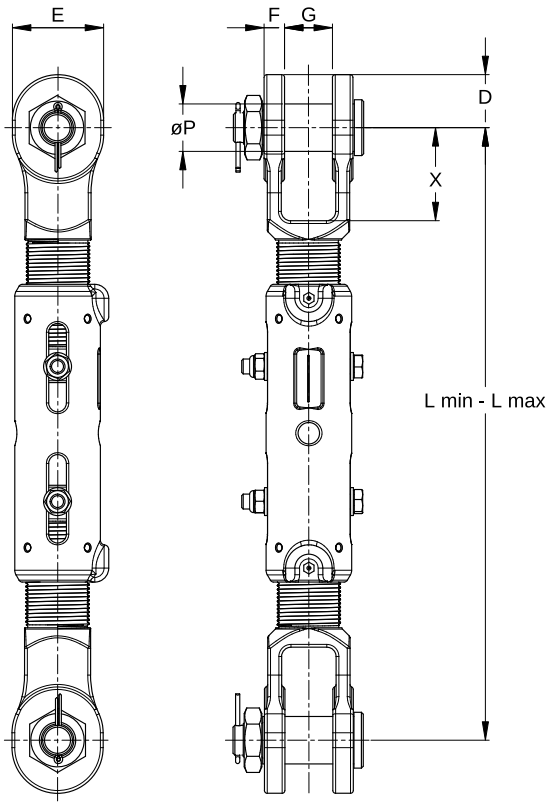

METRIC

MODEL NUMBER	WLL (MTONS)	MBL (MTONS)	DIMENSIONS (MM)									WEIGHT (KG)
			D	E	F	G	L MIN	L MAX	ADJUSTMENT RANGE	ØP	X	
TBL 800-JJ	8	40	45	74	16.5	38	430	540	110	35	55	9.3
TBL 804-JJ	11	55	53	90	20.5	45	480	610	130	41	62	16
TBL 808-JJ	16	80	64	108	22.5	51	565	715	150	51	100	18.8
TBL 811-JJ	20	100	67	114	25	57	650	850	200	57	85	27.9
TBL 815-JJ	26	130	77	135	28	63	700	890	190	63	95	42.6
TBL 818-JJ	32	160	83	146	30	76	750	950	200	70	105	55
TBL 820-JJ	40	200	89	156	33	76	810	1030	220	76	115	70
TBL 825-JJ	50	250	102	178	39	89	950	1200	250	89	135	95


WLL = Working Load Limit | **MBL =** Minimum Breaking Load | **Mtons =** Metric tonnes
Assembly weights may vary depending on the selected configuration


FINISH Zinc-nickel plated with additional primer RAL 170 60 45 on connector tube

GLOBAL ROPE FITTINGS
AQUALLINE PRODUCTS

HEAVY DUTY TRIANGLE PLATES

MORE PRODUCT INFO

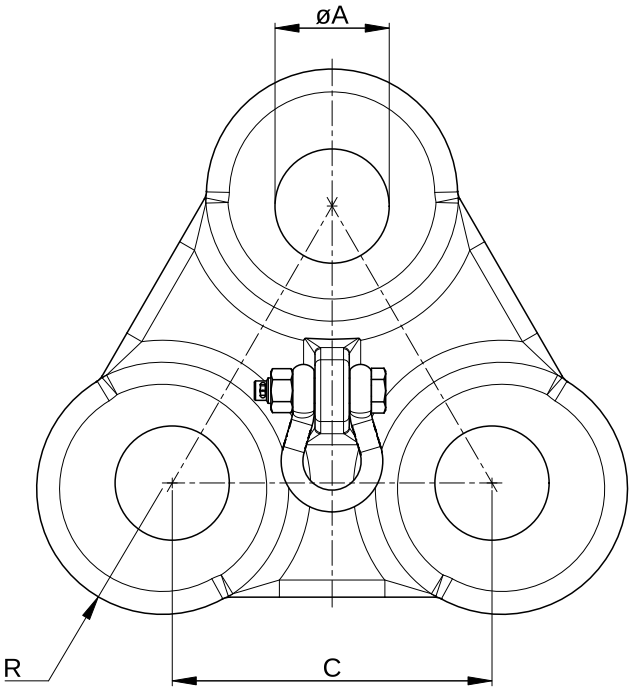

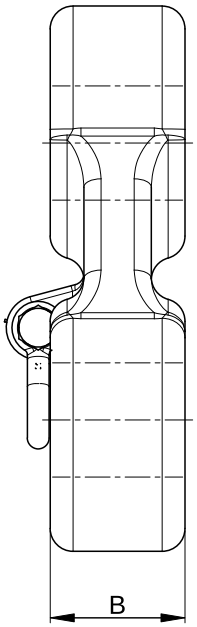

METRIC


MODEL NUMBER	WLL (MTONS)	MBL (MTONS)	DIMENSIONS (MM)				WEIGHT (KG)
			ØA	B	C	R	
HDTP 9.5	9.5	50	35	40	110	45	5
HDTP 12	12	70	38	42	120	48	7.5
HDTP 13.5	13.5	80	41	48	130	50	8
HDTP 17	17	100	46	52	140	55	12.7
HDTP 25	25	125	54	60	155	65	16.4
HDTP 35	35	175	62	70	175	75	25.4
HDTP 55	55	275	76	90	210	90	46
HDTP 85	85	425	88	100	240	105	69
HDTP 120	120	600	100	118	280	120	106
HDTP 150	150	750	115	142	310	135	164
HDTP 200	200	1000	140	150	380	170	261
HDTP 250	250	1250	150	160	425	180	345
HDTP 300	300	1500	160	178	450	193	435
HDTP 400	400	2000	186	205	480	215	680
HDTP 500	500	2500	200	225	510	240	860

WLL = Working Load Limit | **MBL =** Minimum Breaking Load | **Mtons =** Metric tonnes

FINISH Hot-dip galvanised | Primer RAL 170 60 45

SOLID WIRE ROPE THIMBLES

MORE PRODUCT INFO

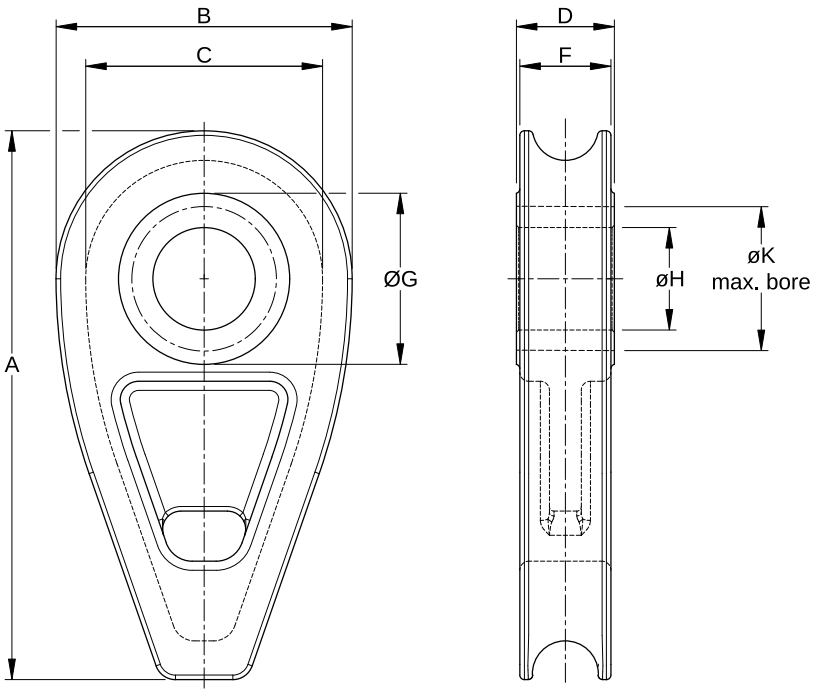

METRIC

MODEL NUMBER	WIRE ROPE Ø (MM)	DIMENSIONS (MM)								WEIGHT (KG)
		A	B	C	D	F	ØG	ØH	ØK	
SWRT 8	7 - 8	74	40	32	15.5	14	28	14	22	0.2
SWRT 10	9 - 10	92	50	40	18	16.5	32	18	27	0.4
SWRT 12	11 - 12	110	60	48	20.5	19	40	21	34	0.6
SWRT 14	13 - 14	128	70	56	24	22.5	45	25	38	0.9
SWRT 16	15 - 16	146	80	64	27	25	50	28	43	1.2
SWRT 18	17 - 18	167	90	72	29	27	54	31	49	1.4
SWRT 20	19 - 20	181	100	80	32	30	58	35	52	2
SWRT 22	21 - 22	204	110	88	34	32	65	40	59	2.4
SWRT 24	23 - 24	222	120	96	37	35	70	42	62	3.3
SWRT 26	25 - 26	235	130	104	40	37	75	45	68	4
SWRT 28	27 - 28	259	140	112	43	40	80	48	72	5
SWRT 32	30 - 32	297	160	128	47	44	90	53	82	6.5
SWRT 36	34 - 36	334	180	144	54	51	100	60	90	10
SWRT 40	38 - 40	366	200	160	60	56	118	65	105	12.5
SWRT 44	42 - 44	403	220	176	64	60	125	70	112	16.5
SWRT 48	46 - 48	440	240	192	70	66	140	76	125	25.2
SWRT 52	50 - 52	476	260	208	75	71	150	82	135	27
SWRT 56	54 - 56	514	280	224	82	78	160	88	145	38.8
SWRT 64	58 - 64	586	320	256	92	88	180	95	165	50
SWRT 72	68 - 72	659	360	288	103	98	200	105	180	70
SWRT 80	76 - 80	720	400	320	115	109	220	115	200	100


K = Maximum machined diameter

FINISH Hot-dip galvanised | Primer RAL 170 60 45 (for SWRT 22 - SWRT 80)

GLOBAL ROPE FITTINGS
AQUALLINE PRODUCTS

WIRE ROPE CLIPS

MORE PRODUCT INFO

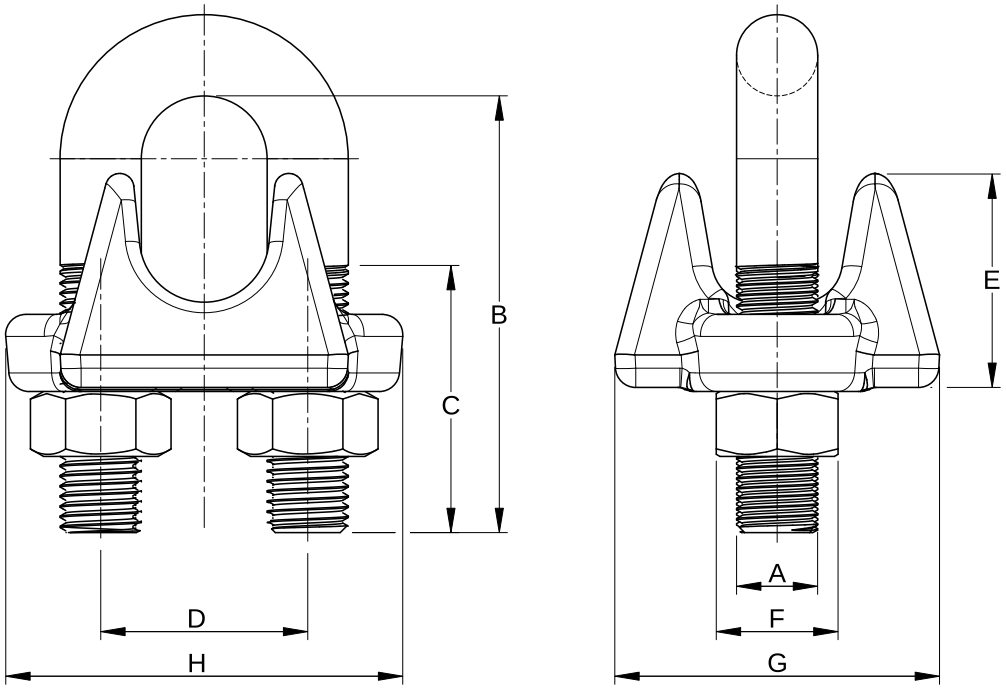

METRIC

MODEL NUMBER	WIRE ROPE Ø (MM)	TORQUE (NM)	DIMENSIONS (MM)								WEIGHT (KG)
			A	B	C	D	E	F	G	H	
WRC 4	3 - 4	6.1	5.5	18.3	11.2	12	10.4	9.7	20.6	23.9	<0.1
WRC 5	5	10	6.4	24.6	14.2	15	12.7	11.2	23.9	29.5	0.1
WRC 6	6 - 7	20.5	7.9	26.2	14.2	19.1	16.8	14.22	30.3	36.6	0.1
WRC 8	8	41	9.7	35	19	22.4	18.3	17.53	33.3	43	0.1
WRC 10	9 - 10	61	11.2	38.1	19	25.4	23.1	19.1	41.4	49.3	0.2
WRC 11	11	88	12.7	47.8	25.4	30.2	26.2	22.4	46	58	0.3
WRC 13	12 - 13	88	12.7	47.8	25.4	30.2	28.7	22.4	48.5	58	0.3
WRC 14	14 - 15	130	14.2	57.2	32	33.3	31	23.9	52.3	63.5	0.5
WRC 16	16	130	14.2	60.5	32	33.3	34	23.9	52.3	63.5	0.5
WRC 19	18 - 20	177	15.8	69.9	36.6	38.1	35.8	26.9	57.2	72.1	0.6
WRC 22	22	306	19	79.3	41.1	44.5	40.4	31.8	62	80.3	1
WRC 26	24 - 26	306	19	89	46	47.8	45.2	31.8	66.8	88.1	1.1
WRC 29	28 - 30	306	19	98.5	50.8	51	48.5	31.8	71.4	91.2	1.3
WRC 32	32 - 34	490	22.3	108	54.1	58.5	55.6	36.6	79.5	105	1.9
WRC 35	36	490	22.3	117.6	58.7	60.5	58.7	36.6	79.5	106	2
WRC 38	38 - 40	490	22.3	125.5	60.5	66	62	36.6	86.6	113	2.4
WRC 42	41 - 42	585	25.4	135	66.6	70	67.6	41.4	92.2	121	3.1
WRC 44	44 - 46	800	28.7	146	70	78	75	46	96.8	134	4.2
WRC 52	48 - 52	1000	31.8	164	76	86	81	50.8	113	149	5.8
WRC 57	56 - 58	1000	31.8	181	81	99.5	83	50.8	114	162	7.3
WRC 64	62 - 65	1000	31.8	195	87	105	94	50.8	118	168	8.3
WRC 70	68 - 72	1000	31.8	211	90	111	124	50.8	127	175	10.5
WRC 76	75 - 78	1630	38.1	233	99	120	126	60.5	149	194	14.2
WRC 89	85 - 90	1630	38.1	273	114	140	152	60.5	157	213	17.1

FINISH Hot-dip galvanised

GLOBAL ROPE FITTINGS
AQUALLINE PRODUCTS