
ADJUSTABLE CLOSED TURNBUCKLE SOCKETS

MORE PRODUCT INFO

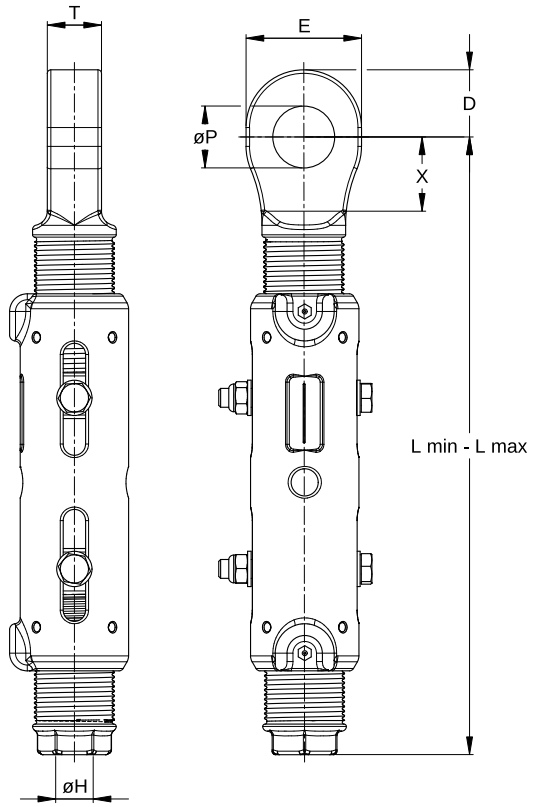

METRIC

MODEL NUMBER	MBL (MTONS)	WIRE ROPE Ø (MM)	APPROX. RESIN VOLUME (CC)	DIMENSIONS (MM)									WEIGHT (KG)
				D	E	ØH	ØP	T	X	L MIN	L MAX	ADJUSTMENT RANGE	
ACTS 800	40	18 - 19	80	40	68	22.5	36.5	34	55	335	445	110	7.7
ACTS 804	55	20 - 22	125	48	80	26.8	42.5	40	60	380	510	130	11
ACTS 808	80	23 - 26	160	58	98	29.5	53	45	75	435	585	150	15.6
ACTS 811	100	27 - 30	210	64	108	34	59	52	85	490	660	170	23.5
ACTS 815	130	31 - 36	350	72	124	40	65	58	100	585	775	190	31.8
ACTS 818	160	37 - 39	425	83	140	44.5	72	76	105	630	830	200	45
ACTS 820	200	40 - 42	500	85	148	48	78	76	115	680	900	220	60
ACTS 825	250	43 - 48	700	98	170	53	91	82	135	810	1060	250	88


MBL = Minimum Breaking Load | **Mtons =** Metric tonnes

FINISH Zinc-nickel plated with additional primer RAL 170 60 45 on connector tube


ADJUSTABLE OPEN TURNBUCKLE SOCKETS

MORE PRODUCT INFO

WITH PIN

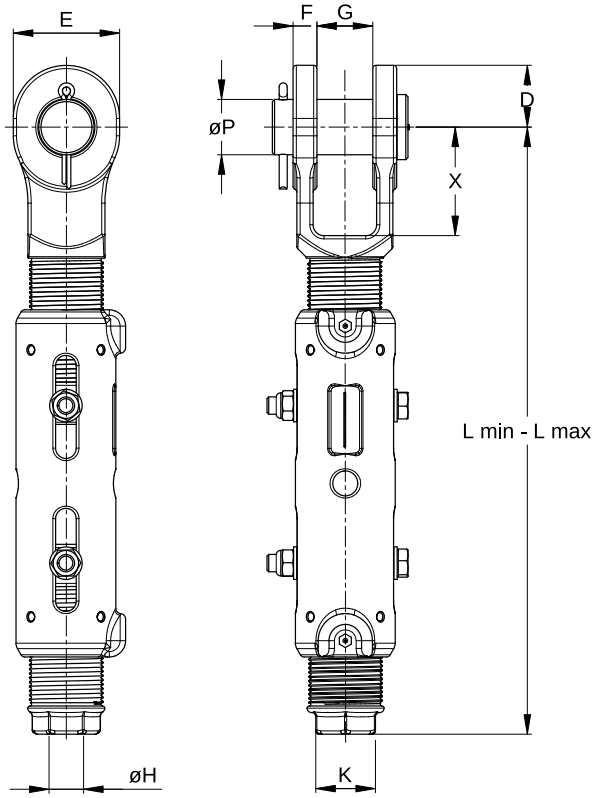

WITH BOLT

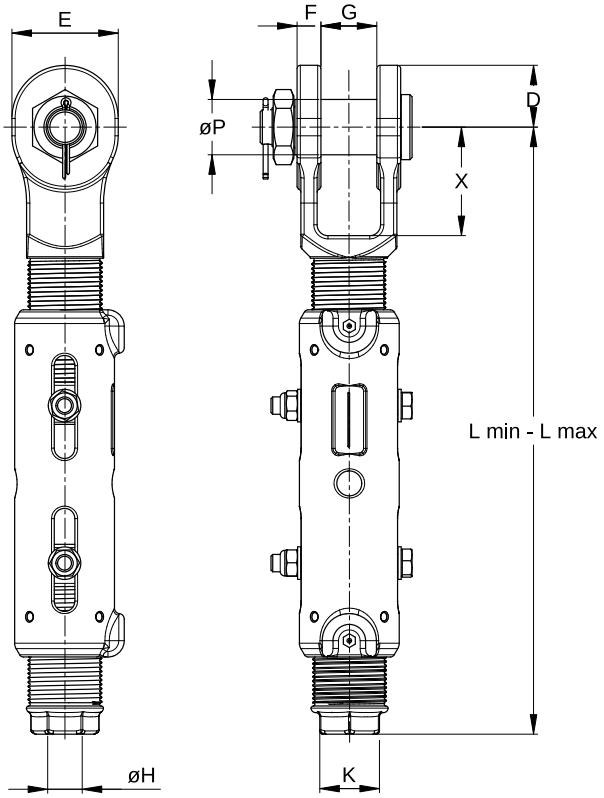

METRIC

MODEL NUMBER	MBL (MTONS)	WIRE ROPE Ø (MM)	APPROX. RESIN VOLUME (CC)	DIMENSIONS (MM)											WEIGHT (KG)
				D	E	F	G	ØH	K	ØP	X	L MIN	L MAX	ADJUSTMENT RANGE	
AOTS 800	40	18 - 19	80	45	74	16.5	38	22.5	41	35	55	340	450	110	8.7
AOTS 804	55	20 - 22	125	53	90	20.5	45	26.8	50	41	62	390	520	130	10.6
AOTS 808	80	23 - 26	160	57	98	22.5	51	29.5	55	51	100	465	640	175	17.3
AOTS 811	100	27 - 30	210	67	114	25	57	34	65	57	85	505	705	200	23.22
AOTS 815	130	31 - 36	350	77	135	28	63	40	75	63	95	600	790	190	38.4
AOTS 818	160	37 - 39	425	83	146	30	76	44.5	80	70	105	650	850	200	46
AOTS 820	200	40 - 42	500	89	156	33	76	48	90	76	115	700	920	220	58
AOTS 825	250	43 - 48	700	102	178	39	89	53	100	89	135	825	1075	250	86

MBL = Minimum Breaking Load | **Mtons =** Metric tonnes | Assembly weights may vary depending on the selected configuration


FINISH Zinc-nickel plated with additional primer RAL 170 60 45 on connector tube

GLOBAL ROPE FITTINGS
AQUALLINE PRODUCTS


ADJUSTABLE OPEN SPELTER SOCKETS

MORE PRODUCT INFO

WITH PIN

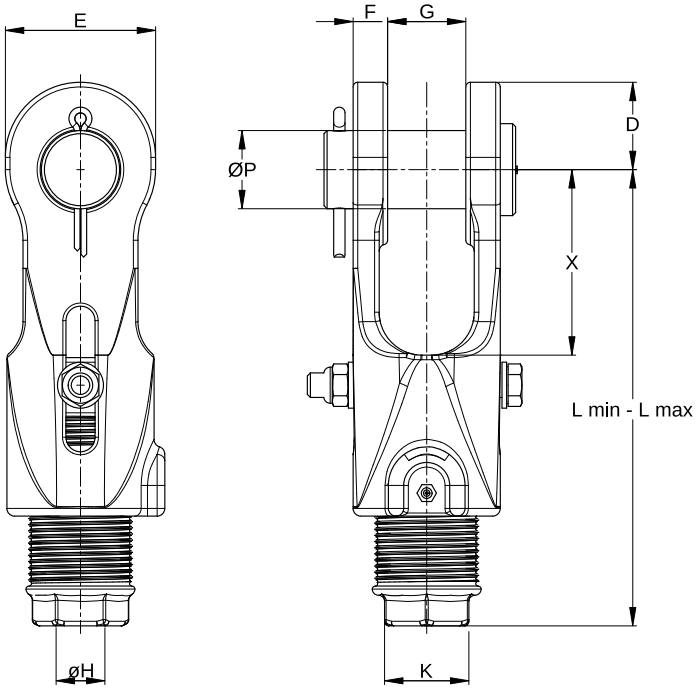

WITH BOLT

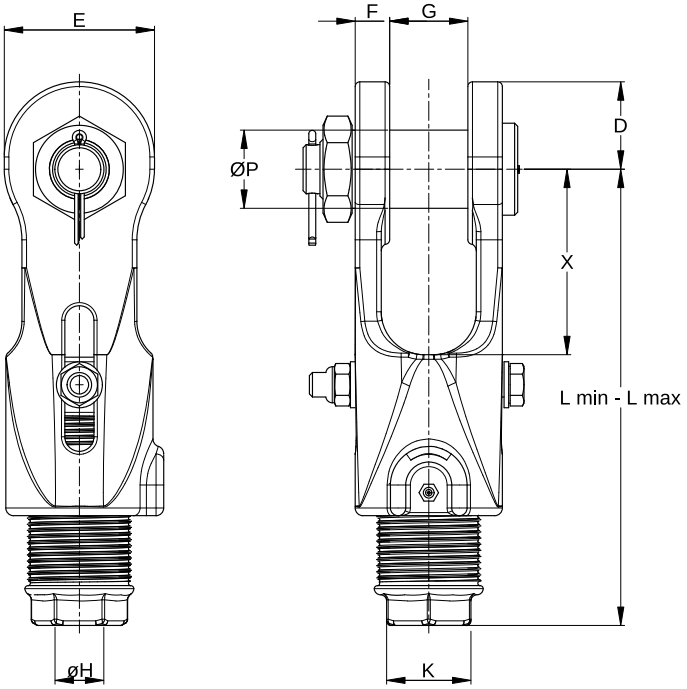

METRIC

MODEL NUMBER	MBL (MTONS)	WIRE ROPE Ø (MM)	APPROX. RESIN VOLUME (CC)	DIMENSIONS (MM)											WEIGHT (KG)
				D	E	F	G	ØH	K	ØP	X	L MIN	L MAX	ADJUSTMENT RANGE	
AOSS 800	40	18 - 19	80	45	74	16.5	38	22.5	41	35	90	185	240	55	5
AOSS 804	55	20 - 22	125	53	90	20.5	45	26.8	50	41	100	207	272	65	8
AOSS 808	80	23 - 26	160	57	98	22.5	51	29.5	55	51	120	245	320	75	12
AOSS 811	100	27 - 30	210	67	114	25	57	34	65	57	130	280	380	100	17
AOSS 815	130	31 - 36	350	77	135	28	63	40	75	63	150	325	415	90	23
AOSS 818	160	37 - 39	425	83	146	30	76	44.5	80	70	170	370	470	100	33
AOSS 820	200	40 - 42	500	89	156	33	76	48	90	76	180	400	510	110	40
AOSS 825	250	43 - 48	700	102	178	39	89	53	100	89	215	485	605	120	60

MBL = Minimum Breaking Load | **Mtons =** Metric tonnes | Assembly weights may vary depending on the selected configuration

FINISH Hot-dip galvanised with zinc-nickel plated components

GLOBAL ROPE FITTINGS
AQUALLINE PRODUCTS