
TURNBUCKLES
EYE-EYE

MORE PRODUCT INFO

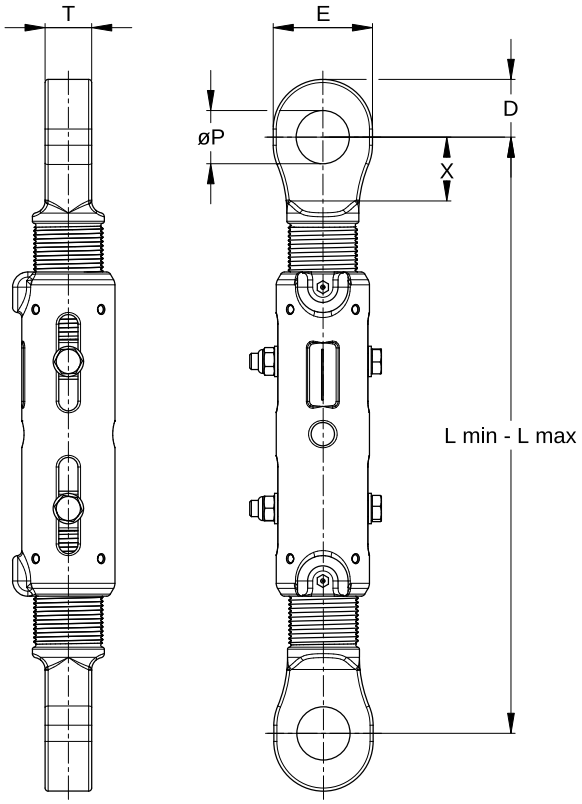

METRIC

MODEL NUMBER	WLL (MTONS)	MBL (MTONS)	DIMENSIONS (MM)								WEIGHT (KG)
			D	E	L MIN	L MAX	ADJUSTMENT RANGE	ØP	T	X	
TBL 800-EE	8	40	40	68	390	500	110	35	34	55	8.7
TBL 804-EE	11	55	48	80	435	565	130	41	40	60	13
TBL 808-EE	16	80	58	98	500	650	150	51	45	75	19.1
TBL 811-EE	20	100	64	108	550	750	200	57	52	85	28
TBL 815-EE	26	130	72	124	660	850	190	63	63	100	38
TBL 818-EE	32	160	83	140	720	920	200	70	76	105	48
TBL 820-EE	40	200	85	148	775	995	220	76	76	115	60
TBL 825-EE	50	250	98	170	920	1170	250	89	82	135	85


WLL = Working Load Limit | **MBL =** Minimum Breaking Load | **Mtons =** Metric tonnes

FINISH Zinc-nickel plated with additional primer RAL 170 60 45 on connector tube


TURNBUCKLES
EYE-JAW

MORE PRODUCT INFO

WITH PIN

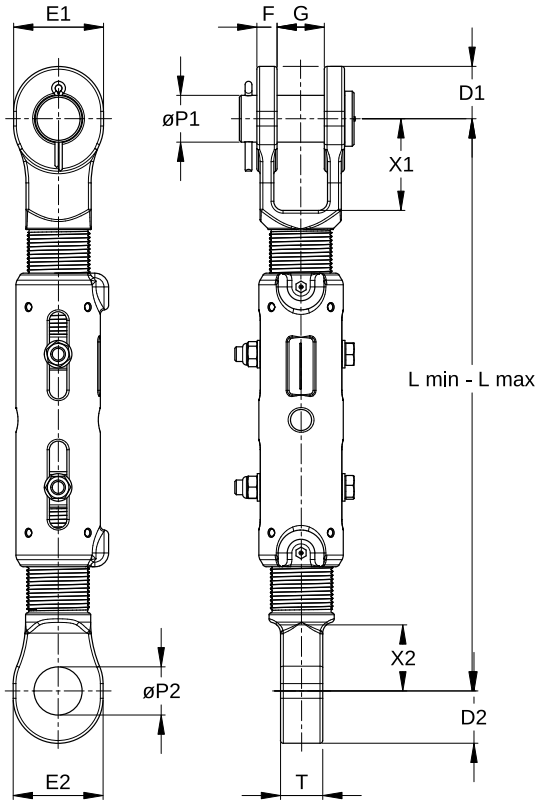

WITH BOLT

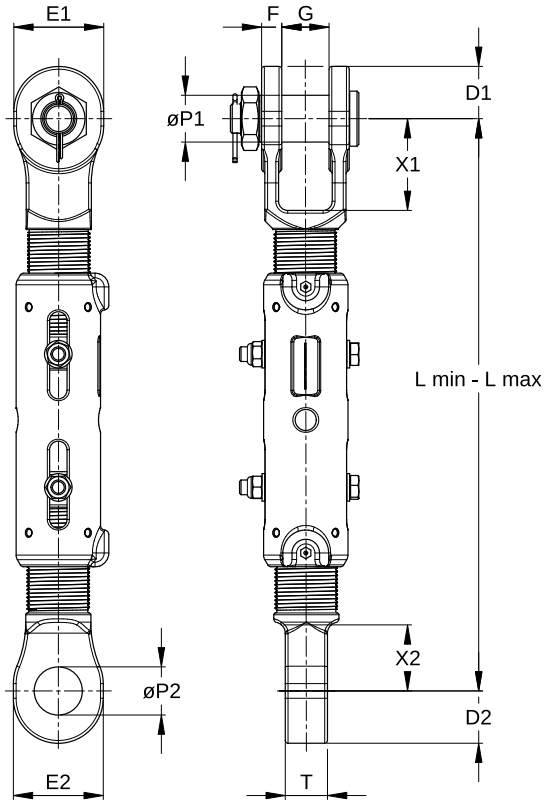

METRIC

MODEL NUMBER	WLL (MTONS)	MBL (MTONS)	DIMENSIONS (MM)														WEIGHT (KG)
			D1	E1	F	G	ØP1	X1	L MIN	L MAX	ADJUSTMENT RANGE	D2	E2	ØP2	X2	T	
TBL 800-EJ	8	40	45	74	16.5	38	35	55	410	520	110	40	68	35	55	34	9
TBL 804-EJ	11	55	53	90	20.5	45	41	62	460	590	130	48	80	41	60	40	15
TBL 808-EJ	16	80	64	108	22.5	51	51	100	530	680	150	58	98	51	75	45	19.7
TBL 811-EJ	20	100	67	114	25	57	57	85	600	800	200	64	108	57	85	52	28.4
TBL 815-EJ	26	130	77	135	28	63	63	95	670	860	190	72	124	63	100	63	41
TBL 818-EJ	32	160	83	146	30	76	70	105	735	935	200	83	140	70	105	76	55
TBL 820-EJ	40	200	89	156	33	76	76	115	790	1010	220	85	148	76	115	76	70
TBL 825-EJ	50	250	102	178	39	89	89	135	935	1185	250	98	170	89	135	82	95

WLL = Working Load Limit | **MBL =** Minimum Breaking Load | **Mtons =** Metric tonnes
Assembly weights may vary depending on the selected configuration


FINISH Zinc-nickel plated with additional primer RAL 170 60 45 on connector tube

GLOBAL ROPE FITTINGS
AQUALLINE PRODUCTS


TURNBUCKLES
JAW-JAW

MORE PRODUCT INFO

WITH PIN

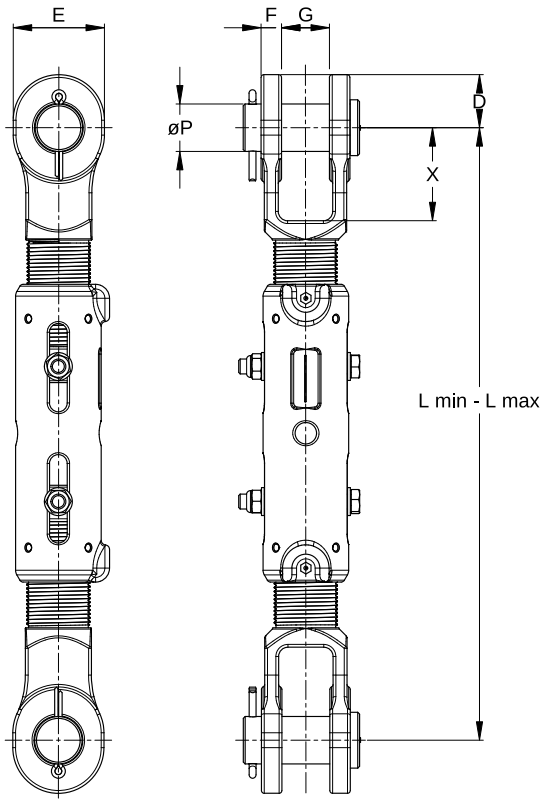

WITH BOLT

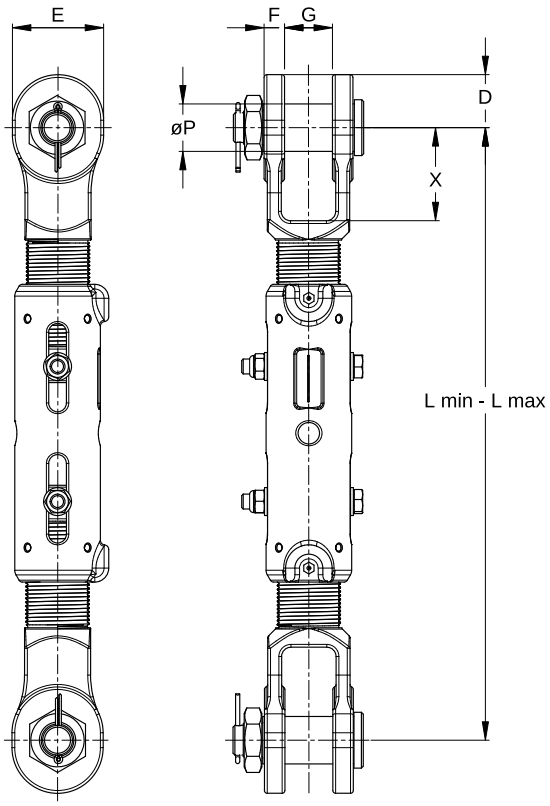

METRIC

MODEL NUMBER	WLL (MTONS)	MBL (MTONS)	DIMENSIONS (MM)									WEIGHT (KG)
			D	E	F	G	L MIN	L MAX	ADJUSTMENT RANGE	ØP	X	
TBL 800-JJ	8	40	45	74	16.5	38	430	540	110	35	55	9.3
TBL 804-JJ	11	55	53	90	20.5	45	480	610	130	41	62	16
TBL 808-JJ	16	80	64	108	22.5	51	565	715	150	51	100	18.8
TBL 811-JJ	20	100	67	114	25	57	650	850	200	57	85	27.9
TBL 815-JJ	26	130	77	135	28	63	700	890	190	63	95	42.6
TBL 818-JJ	32	160	83	146	30	76	750	950	200	70	105	55
TBL 820-JJ	40	200	89	156	33	76	810	1030	220	76	115	70
TBL 825-JJ	50	250	102	178	39	89	950	1200	250	89	135	95

WLL = Working Load Limit | **MBL =** Minimum Breaking Load | **Mtons =** Metric tonnes
Assembly weights may vary depending on the selected configuration

FINISH Zinc-nickel plated with additional primer RAL 170 60 45 on connector tube

GLOBAL ROPE FITTINGS
AQUALLINE PRODUCTS