
TURNBUCKLES
EYE-EYE

MORE PRODUCT INFO

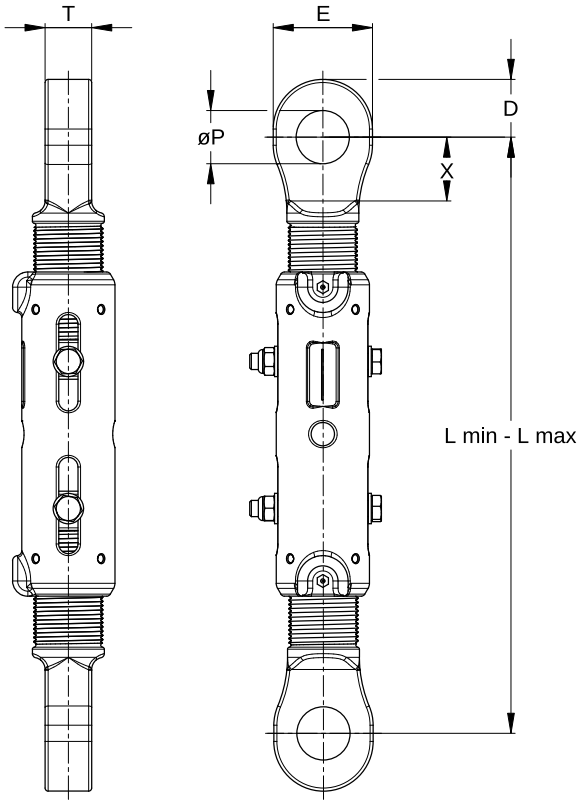

IMPERIAL

MODEL NUMBER	WLL (MTONS)	MBL (MTONS)	DIMENSIONS (INCH)								WEIGHT (LBS)
			D	E	L MIN	L MAX	ADJUSTMENT RANGE	ØP	T	X	
TBL 800-EE	8	40	1.57	2.68	15.35	19.69	4.34	1.38	1.34	2.17	19.2
TBL 804-EE	11	55	1.89	3.15	17.13	22.24	5.11	1.61	1.57	2.36	28.7
TBL 808-EE	16	80	2.28	3.86	19.69	25.59	5.90	2.01	1.77	2.95	42.1
TBL 811-EE	20	100	2.52	4.25	21.65	29.53	7.88	2.24	2.05	3.35	61.7
TBL 815-EE	26	130	2.83	4.88	25.98	33.46	7.48	2.48	2.48	3.94	83.8
TBL 818-EE	32	160	3.27	5.51	28.35	36.22	7.87	2.76	2.99	4.13	105.8
TBL 820-EE	40	200	3.35	5.83	30.51	39.17	8.66	2.99	2.99	4.53	132.3
TBL 825-EE	50	250	3.86	6.69	36.22	46.06	9.84	3.50	3.23	5.31	187.4


WLL = Working Load Limit | **MBL =** Minimum Breaking Load | **Mtons =** Metric tonnes

FINISH Zinc-nickel plated with additional primer RAL 170 60 45 on connector tube


TURNBUCKLES
EYE-JAW

MORE PRODUCT INFO

WITH PIN

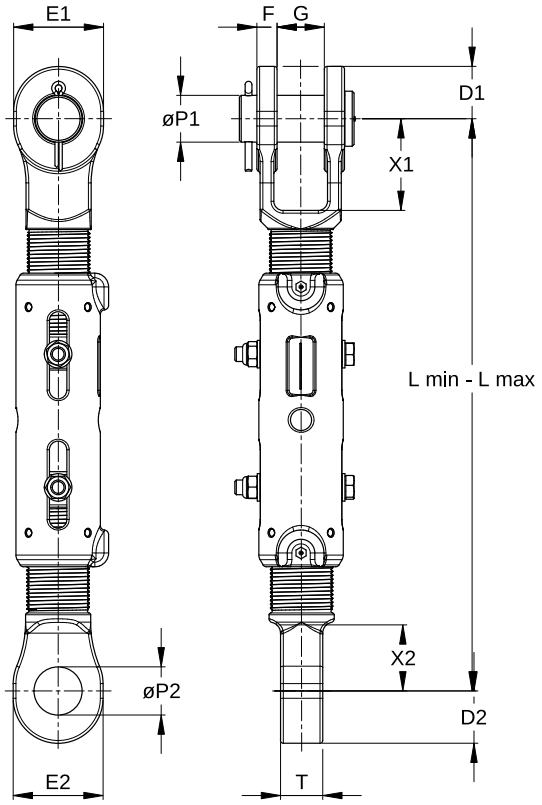

WITH BOLT

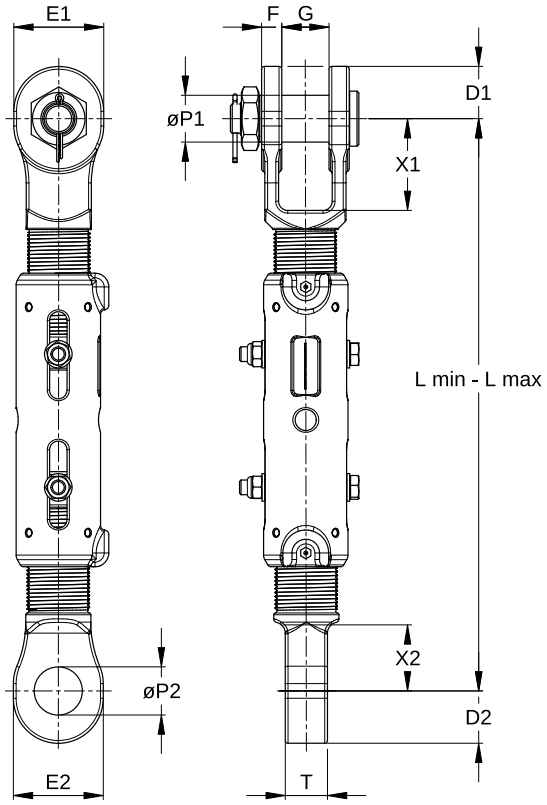

IMPERIAL

"MODEL NUMBER"	WLL (MTONS)	MBL (MTONS)	DIMENSIONS (INCH)														WEIGHT (LBS)
			D1	E1	F	G	ØP1	X1	L MIN	L MAX	ADJUSTMENT RANGE	D2	E2	ØP2	X2	T	
TBL 800-EJ	8	40	1.77	2.91	0.65	1.50	1.38	2.17	16.14	20.47	4.33	1.57	2.68	1.38	2.17	1.34	19.8
TBL 804-EJ	11	55	2.09	3.54	0.81	1.77	1.61	2.44	18.11	23.23	5.12	1.89	3.15	1.61	2.36	1.57	33.1
TBL 808-EJ	16	80	2.52	4.25	0.89	2.01	2.01	3.94	20.87	26.77	5.90	2.28	3.86	2.01	2.95	1.77	43.4
TBL 811-EJ	20	100	2.64	4.49	0.98	2.24	2.24	3.35	23.62	31.50	7.88	2.52	4.25	2.24	3.35	2.05	62.6
TBL 815-EJ	26	130	3.03	5.31	1.10	2.48	2.48	3.74	26.38	33.86	7.48	2.83	4.88	2.48	3.94	2.48	90.4
TBL 818-EJ	32	160	3.27	5.75	1.18	2.99	2.76	4.13	28.94	36.81	7.87	3.27	5.51	2.76	4.13	2.99	121.3
TBL 820-EJ	40	200	3.50	6.14	1.30	2.99	2.99	4.53	31.10	39.76	8.66	3.35	5.83	2.99	4.53	2.99	154.3
TBL 825-EJ	50	250	4.02	7.01	1.54	3.50	3.50	5.31	36.81	46.65	9.84	3.86	6.69	3.50	5.31	3.23	209.4


WLL = Working Load Limit | **MBL =** Minimum Breaking Load | **Mtons =** Metric tonnes
Assembly weights may vary depending on the selected configuration

FINISH Zinc-nickel plated with additional primer RAL 170 60 45 on connector tube


TURNBUCKLES
JAW-JAW

MORE PRODUCT INFO

WITH PIN

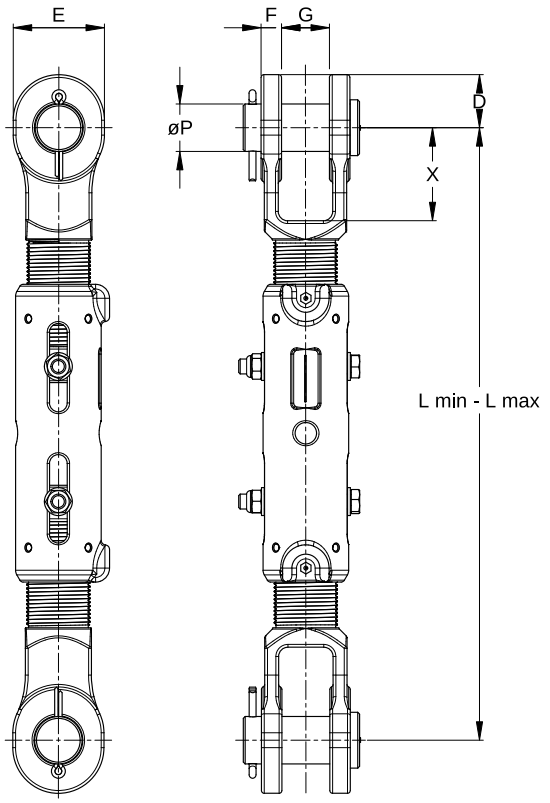

WITH BOLT

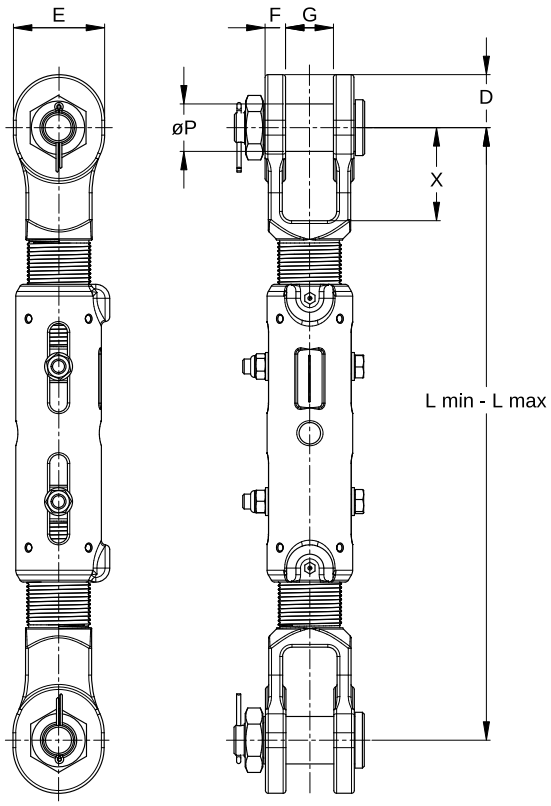

IMPERIAL

MODEL NUMBER	WLL (MTONS)	MBL (MTONS)	DIMENSIONS (INCH)									WEIGHT (LBS)
			D	E	F	G	L MIN	L MAX	ADJUSTMENT RANGE	ØP	X	
TBL 800-JJ	8	40	1.77	2.91	0.65	1.50	16.93	21.26	4.33	1.38	2.17	20.5
TBL 804-JJ	11	55	2.09	3.54	0.81	1.77	18.90	24.02	5.12	1.61	2.44	35.3
TBL 808-JJ	16	80	2.52	4.25	0.89	2.01	22.24	28.15	5.91	2.01	3.94	41.4
TBL 811-JJ	20	100	2.64	4.49	0.98	2.24	25.59	33.46	7.87	2.24	3.35	61.5
TBL 815-JJ	26	130	3.03	5.31	1.10	2.48	27.56	35.04	7.48	2.48	3.74	93.9
TBL 818-JJ	32	160	3.27	5.75	1.18	2.99	29.53	37.40	7.87	2.76	4.13	121.3
TBL 820-JJ	40	200	3.50	6.14	1.30	2.99	31.89	40.55	8.66	2.99	4.53	154.3
TBL 825-JJ	50	250	4.02	7.01	1.54	3.50	37.40	47.24	9.84	3.50	5.31	209.4

WLL = Working Load Limit | **MBL =** Minimum Breaking Load | **Mtons =** Metric tonnes
Assembly weights may vary depending on the selected configuration

FINISH Zinc-nickel plated with additional primer RAL 170 60 45 on connector tube