
ANCHOR PENDANT SOCKETS

MORE PRODUCT INFO

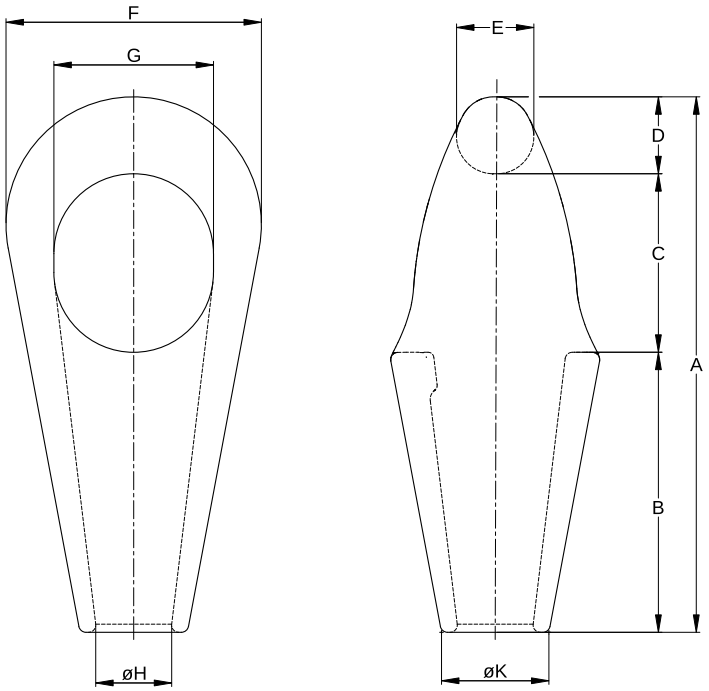

IMPERIAL

MODEL NUMBER	MBL (MTONS)	WIRE ROPE Ø (INCH)	APPROX. RESIN VOLUME (CC)	DIMENSIONS (INCH)									WEIGHT (LBS)
				A	B	C	D	E	F	G	ØH	ØK	
APS 512	130	1 1/4 - 1 3/8	350	10.63	5.55	3.46	1.57	1.42	5.51	3.23	1.61	2.36	16.8
APS 517	160	1 1/2 - 1 5/8	500	12.17	6.38	4.06	1.73	1.57	5.98	3.62	1.81	2.64	23.1
APS 519	200	1 3/4 - 1 7/8	700	14.53	7.60	4.84	2.09	1.89	6.93	4.33	2.09	2.91	35.3
APS 522	250	2 - 2 1/8	1250	16.06	8.27	5.51	2.28	2.05	7.87	4.92	2.30	3.27	47.4
APS 524	320	2 1/4 - 2 3/8	1425	17.80	9.06	6.18	2.56	2.28	8.90	5.51	2.68	3.78	68.3
APS 526	400	2 1/2 - 2 5/8	1850	19.65	9.84	6.85	2.95	2.60	9.84	6.14	2.99	4.21	91.9
APS 527	500	2 3/4 - 2 7/8	2300	21.69	11.02	7.52	3.15	2.76	10.83	6.73	3.15	4.53	121.3
APS 528	600	3 - 3 1/8	3400	23.27	12.17	7.72	3.39	2.99	11.42	7.09	3.50	4.92	153.2
APS 529	700	3 1/4 - 3 3/8	4100	25.31	13.07	8.31	3.94	3.54	11.97	7.40	3.70	5.24	184.7
APS 530	800	3 1/2 - 3 5/8	5200	26.97	14.17	8.66	4.13	3.74	13.07	8.27	3.90	5.59	240.3
APS 531	900	3 3/4 - 4	7700	28.43	14.76	9.25	4.41	3.98	14.41	8.66	4.33	6.18	299.8
APS 533	1000	4 1/4 - 4 1/2	10500	32.20	16.54	10.63	4.96	4.41	15.94	9.45	5.04	7.09	496.3
APS 540	1200	4 3/4 - 5	14000	36.22	19.29	11.42	5.51	4.96	17.72	10.87	5.51	7.87	705.5


MBL = Minimum Breaking Load | **Mtons =** Metric tonnes

FINISH Hot-dip galvanised | Primer RAL 170 60 45 (for APS 522 - APS 540)

GLOBAL ROPE FITTINGS
AQUALLINE PRODUCTS

CLOSED SPELTER SOCKETS

MORE PRODUCT INFO

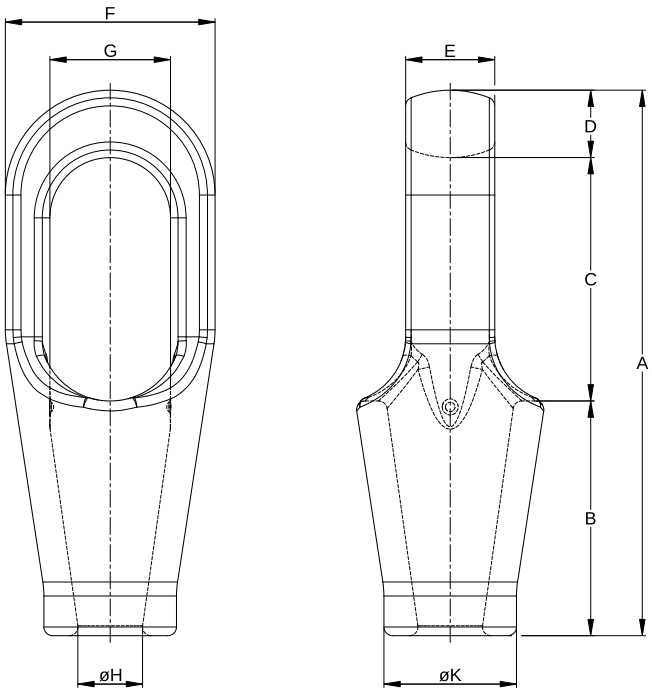

IMPERIAL

MODEL NUMBER	MBL (MTONS)	WIRE ROPE Ø (INCH)	STRUCTURAL STRAND Ø (INCH)	APPROX. RESIN VOLUME (CC)	DIMENSIONS (INCH)									WEIGHT (LBS)
					A	B	C	D	E	F	G	ØH	ØK	
CSS 296	8	1/4	-	10	4.02	1.81	1.77	0.43	0.55	1.50	0.87	0.39	0.79	0.7
CSS 297	12	5/16 - 3/8	-	22	4.72	2.13	2.05	0.55	0.69	1.73	0.94	0.53	1.02	0.9
CSS 298	20	7/16 - 1/2	-	37	5.51	2.52	2.32	0.67	0.91	2.09	1.18	0.59	1.18	1.5
CSS 299	25	9/16 - 5/8	1/2	54	6.38	2.99	2.56	0.83	1.02	2.64	1.42	0.73	1.52	2.9
CSS 200	40	3/4	9/16 - 5/8	91	7.64	3.50	3.07	1.06	1.26	3.03	1.65	0.89	1.81	4.6
CSS 201	55	7/8	1 1/16 - 3/4	145	8.82	3.98	3.54	1.30	1.50	3.62	1.97	1.06	2.17	7.7
CSS 204	80	1	1 3/16 - 7/8	172	9.96	4.49	4.06	1.42	1.77	3.98	2.24	1.16	2.44	11.2
CSS 207	100	1 1/8	15/16 - 1	224	11.10	5.00	4.57	1.54	2.01	4.49	2.56	1.34	2.76	15.7
CSS 212	130	1 1/4 - 1 3/8	1 1/16 - 1 1/8	370	12.28	5.47	5.12	1.69	2.24	5.00	2.80	1.57	3.27	22
CSS 215	160	1 1/2	1 3/16 - 1 1/4	463	14.09	5.98	6.10	2.01	2.48	5.51	3.15	1.75	3.54	31.7
CSS 217	200	1 5/8	1 5/16 - 1 3/8	549	15.35	6.50	6.73	2.13	2.76	5.83	3.31	1.89	3.82	39.9
CSS 219	250	1 3/4 - 1 7/8	1 7/16 - 1 5/8	772	17.44	7.48	7.80	2.17	2.99	6.73	3.74	2.09	4.41	60
CSS 222	300	2 - 2 1/8	1 11/16 - 1 3/4	1364	19.76	8.50	8.82	2.44	3.23	7.60	4.37	2.30	4.92	71
CSS 224	375	2 1/4 - 2 3/8	1 13/16 - 1 7/8	1589	21.65	9.02	9.76	2.87	3.62	8.62	4.92	2.70	5.31	100.3
CSS 226	450	2 1/2 - 2 5/8	1 15/16 - 2 1/8	2040	23.50	9.76	10.63	3.11	4.02	9.49	5.51	3.05	5.91	126.3
CSS 227	500	2 3/4 - 2 7/8	2 3/16 - 2 7/16	2338	25.35	10.98	11.26	3.11	4.88	10.75	6.26	3.27	6.30	173.1
CSS 228	600	3 - 3 1/8	2 1/2 - 2 5/8	3428	27.13	12.01	11.73	3.39	5.24	11.50	6.73	3.50	6.69	255.7
CSS 229	650	3 1/4 - 3 3/8	2 3/4 - 2 7/8	4392	28.98	12.99	12.24	3.74	5.75	12.24	7.24	3.74	7.09	311.7
CSS 230	750	3 1/2 - 3 5/8	3 - 3 1/8	5586	31.02	14.02	12.99	4.02	6.26	12.99	7.76	3.90	7.87	378.1
CSS 231	900	3 3/4 - 4	3 1/4 - 3 3/8	8187	33.27	15.00	14.02	4.25	7.01	14.25	8.50	4.33	8.46	496
CSS 233	1200	4 1/4 - 4 1/2	3 3/4 - 4 1/4	10500	37.99	17.32	15.75	4.92	7.48	15.94	9.25	5.04	9.84	683.4
CSS 240	1400	4 3/4 - 5	4 7/16 - 4 3/4	14000	42.13	19.29	17.72	5.12	8.07	17.72	10.24	5.63	10.63	860.2
CSS 245	1750	5 5/16 - 5 1/2	4 7/8 - 5 1/8	23370	45.87	21.06	18.90	6.50	8.86	18.90	10.63	6.22	11.81	1102.3
CSS 250	2000	5 9/16 - 6	5 1/4 - 5 5/8	29930	54.33	22.64	20.87	7.09	9.45	20.87	11.81	6.73	12.60	1488.1
CSS 260	2500	6 9/16 - 7	6 1/8 - 6 5/16	48694	57.87	26.77	23.23	7.87	10.63	23.62	13.39	7.83	14.17	1929
CSS 265	2800	7 1/16 - 7 1/2	6 9/16 - 7 1/16	58605	61.61	28.54	24.41	8.66	11.42	24.80	14.17	8.43	17.32	2204.6
CSS 270	3200	7 9/16 - 8	7 1/16 - 7 1/2	72096	65.75	30.51	25.59	9.65	12.01	27.17	15.75	9.06	19.09	2788.8

MBL = Minimum Breaking Load | **Mtons =** Metric tonnes


FINISH Hot-dip galvanised | Primer RAL 170 60 45 (for CSS 207 - CSS 270)

GLOBAL ROPE FITTINGS
AQUALLINE PRODUCTS


FAST CONNECTOR SOCKETS


MORE PRODUCT INFO

WITH PIN

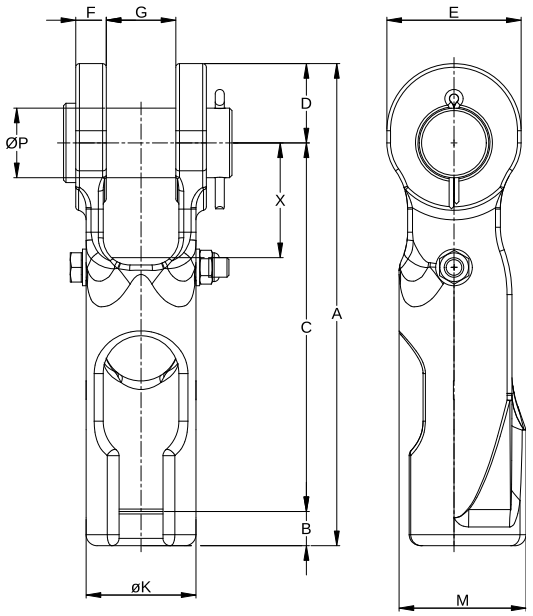

WITH BOLT

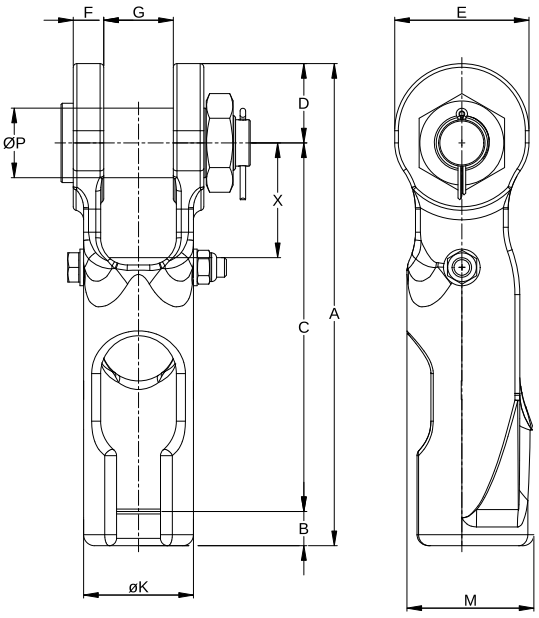

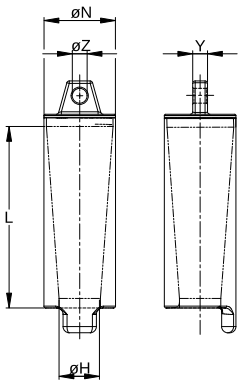

IMPERIAL

MODEL NUMBER	MBL (MTONS)	WIRE ROPE Ø (INCH)	APPROX. RESIN VOLUME (CC)	DIMENSIONS (INCH)															WEIGHT (LBS)
				A	B	C	D	E	F	G	ØH	ØK	L	M	ØN	ØP	X	Y	ØZ	
FCS 701	20	7/16 - 1/2	35	7.48	0.51	5.87	1.10	1.89	0.49	1.02	0.59	1.57	2.76	1.85	1.02	0.98	1.77	0.31	0.31	3.7
FCS 702	25	9/16 - 5/8	50	8.94	0.63	7.05	1.26	2.20	0.57	1.26	0.75	1.97	3.31	2.28	1.26	1.18	2.28	0.31	0.31	6.6
FCS 703	40	2/3 - 3/4	80	10.24	0.71	7.95	1.57	2.68	0.65	1.50	0.87	2.36	3.86	2.76	1.54	1.38	2.52	0.39	0.41	10.1
FCS 704	55	7/8	125	11.93	0.87	9.17	1.89	3.15	0.81	1.77	1.04	2.72	4.61	3.15	1.77	1.61	3.23	0.47	0.47	16.1
FCS 705	80	1	160	14.37	0.98	11.10	2.28	3.86	0.89	2.01	1.16	3.15	5.43	3.66	2.05	2.01	3.74	0.47	0.47	25.8
FCS 706	100	1 1/8	210	15.75	1.10	11.89	2.56	4.33	0.98	2.24	1.32	3.54	6.18	4.09	2.28	2.24	3.82	0.47	0.47	33.5
FCS 707	120	1 1/4	350	16.77	1.18	12.76	2.83	4.88	1.10	2.48	1.44	3.86	6.69	4.37	2.52	2.48	3.94	0.55	0.47	44.1
FCS 708	130	1 3/8	425	18.31	1.34	14.02	2.99	5.20	1.10	2.76	1.57	4.02	7.20	4.61	2.68	2.48	4.33	0.63	0.55	49.8
FCS 709	160	1 1/2	500	19.76	1.46	15.16	3.15	5.51	1.18	2.99	1.69	4.33	8.15	4.92	2.99	2.76	4.53	0.67	0.69	67.9
FCS 710	200	1 5/8	700	21.65	1.57	16.73	3.35	5.83	1.30	2.99	1.89	4.96	9.06	5.59	3.35	2.99	4.92	0.79	0.79	110.2
FCS 711	250	1 3/4 - 1 7/8	1250	24.41	1.77	18.78	3.86	6.69	1.54	3.50	2.20	5.51	10.24	6.18	3.74	3.50	5.31	0.79	0.79	143.3
FCS 712	300	2	1425	26.97	1.89	20.75	4.25	7.32	1.81	3.98	2.36	6.18	11.22	6.89	4.09	3.74	5.91	0.98	0.91	175.7
FCS 713	375	2 1/4	2000	29.92	2.17	23.35	4.72	8.27	2.09	4.45	2.60	6.69	12.99	7.28	4.65	4.25	6.50	0.98	0.91	238.8

MBL = Minimum Breaking Load | **Mtons =** Metric tonnes | Assembly weights may vary depending on the selected configuration


FINISH Hot-dip galvanised with zinc-nickel plated components | Primer RAL 170 60 45 (for FCS 704 - FCS 713)


GLOBAL ROPE FITTINGS
AQUALLINE PRODUCTS

MOBILE HARBOUR CRANE SOCKETS


MORE PRODUCT INFO


CLOSED VERSION

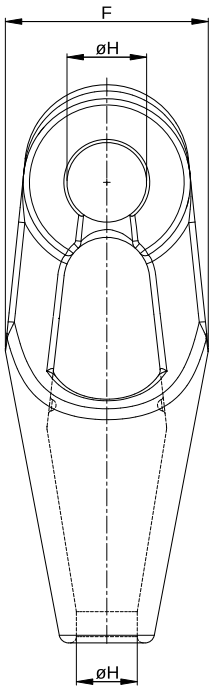

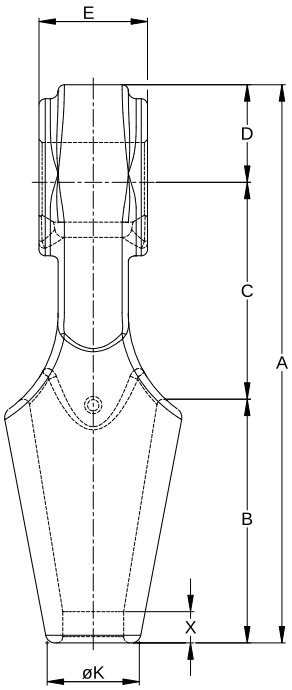

OPEN VERSION WITH BOLT (ROLLER OPTIONAL)

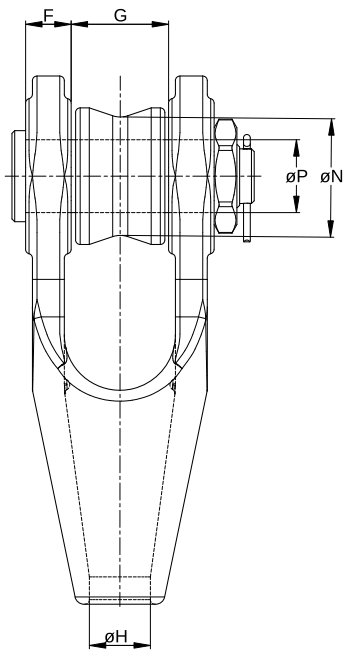

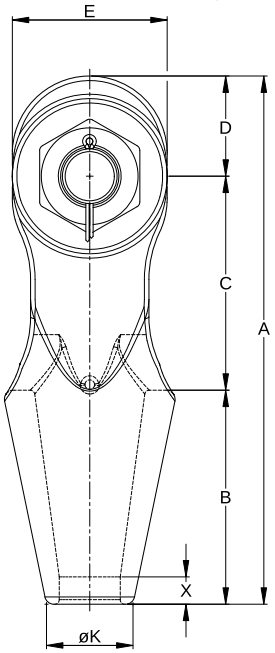

IMPERIAL

MODEL NUMBER	COMPATIBLE WITH MODEL NUMBER	MBL (MTONS)	WIRE ROPE Ø (INCH)	APPROX. RESIN VOLUME (CC)	DIMENSIONS (INCH)												WEIGHT (LBS)
					A	B	C	D	E	F	G	ØH	ØK	ØN	ØP	X	
CLOSED VERSION																	
MHCS 6-CLOSED	Gottwald 6	125	$1^{1}/_{4}$-$1^{5}/_{16}$	500	14.49	6.10	5.39	2.48	2.64	5.83	-	1.65	2.36	-	-	1.02	27.6
MHCS 7-CLOSED	Gottwald 7	160	$1^{3}/_{8}$-$1^{1}/_{2}$	750	16.34	6.89	6.69	2.76	3.03	6.61	-	1.85	2.56	-	-	1.14	41.9
MHCS 8-CLOSED	Gottwald 8	200	$1^{9}/_{16}$-$1^{11}/_{16}$	1000	18.43	7.80	7.48	3.15	3.43	7.87	-	2.05	2.95	-	-	1.30	55.1
MHCS 9-CLOSED	Gottwald 9	280	$1^{3}/_{4}$-$2^{1}/_{8}$	1500	22.83	9.25	9.25	4.33	3.86	8.46	-	2.64	3.74	-	-	1.18	105.8
MHCS 10-CLOSED	Gottwald 10	400	$2^{3}/_{16}$-$2^{3}/_{8}$	2500	24.80	10.43	11.18	4.72	4.72	9.37	-	2.83	4.33	-	-	1.38	143.3
MHCS 11-CLOSED	Gottwald 11	450	$2^{3}/_{8}$-$2^{9}/_{16}$	4000	28.15	12.28	10.94	4.92	5.47	10.24	-	3.07	4.65	-	-	1.57	187.4
OPEN VERSION																	
MHCS 6-OPEN	Gottwald 6	125	$1^{1}/_{4}$-$1^{5}/_{16}$	500	14.37	6.10	5.91	2.36	4.33	1.46	2.76	1.65	2.36	3.15	2.17	0.79	37
MHCS 7-OPEN	Gottwald 7	160	$1^{3}/_{8}$-$1^{1}/_{2}$	750	16.34	6.89	6.69	2.95	5.12	1.61	3.15	1.85	2.56	3.74	2.36	0.91	55.1
MHCS 8-OPEN	Gottwald 8	200	$1^{9}/_{16}$-$1^{11}/_{16}$	1000	18.74	7.80	7.48	3.46	5.35	1.81	3.54	2.05	2.95	3.94	2.76	0.98	75.2
MHCS 9-OPEN	Gottwald 9	280	$1^{3}/_{4}$-$2^{1}/_{8}$	1500	22.83	9.25	9.25	4.33	6.69	1.97	4.17	2.64	3.74	5.12	3.15	1.18	129.9
MHCS 10-OPEN	Gottwald 10	400	$2^{3}/_{16}$-$2^{3}/_{8}$	2500	24.80	10.43	9.65	4.72	7.48	2.13	4.96	2.83	4.33	O.R.	3.54	1.38	158.7
MHCS 11-OPEN	Gottwald 11	450	$2^{3}/_{8}$-$2^{9}/_{16}$	4000	27.76	12.28	11.22	4.92	7.87	2.20	5.67	3.07	4.65	O.R.	3.94	1.57	205

MBL = Minimum Breaking Load | **Mtons =** Metric tonnes | Assembly weights may vary depending on the selected configuration


FINISH Hot-dip galvanised with zinc-nickel plated components I Primer RAL 170 60 45

GLOBAL ROPE FITTINGS
AQUALLINE PRODUCTS

OPEN DIN SOCKETS

MORE PRODUCT INFO

WITH BOLT

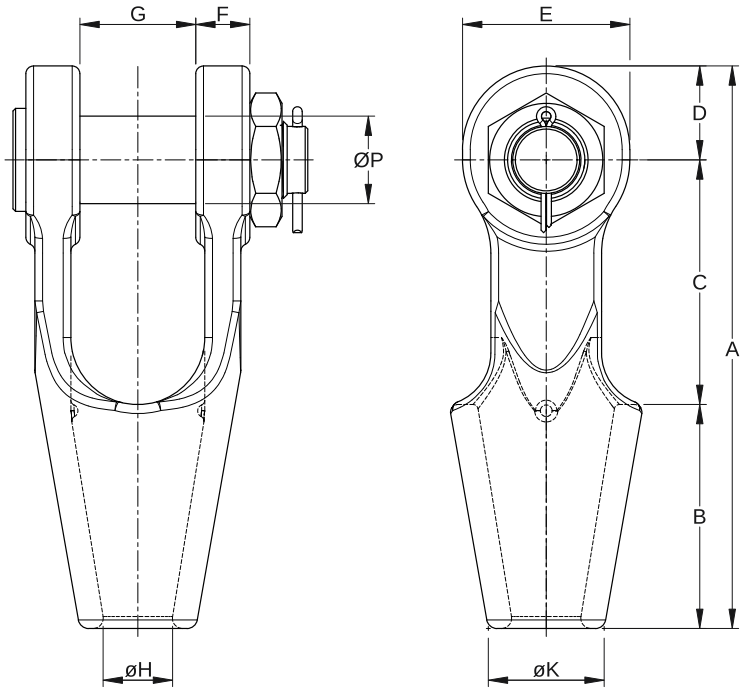

IMPERIAL

MODEL NUMBER	MBL (MTONS)	WIRE ROPE Ø (INCH)	APPROX. RESIN VOLUME (CC)	DIMENSIONS (INCH)										WEIGHT (LBS)
				A	B	C	D	E	F	G	ØH	ØK	ØP	
ODS 1.6	12	1/2 - 7/16	30	5.87	2.36	2.56	0.94	1.73	0.55	1.06	0.67	1.26	0.79	2.6
ODS 2.5	20	7/16 - 9/16	50	6.97	2.72	3.11	1.14	2.05	0.63	1.30	0.79	1.50	0.94	4.6
ODS 3	25	5/8 - 3/4	80	7.80	3.07	3.43	1.30	2.28	0.71	1.50	0.91	1.69	1.06	6
ODS 4	30	9/16 - 7/8	100	8.46	3.31	3.78	1.38	2.44	0.79	1.65	0.98	1.81	1.18	7.7
ODS 5	40	3/4 - 1	125	9.53	3.70	4.17	1.65	2.91	0.91	1.85	1.06	1.97	1.42	11.2
ODS 6	50	7/8 - 1 1/8	150	10.43	4.17	4.49	1.77	3.15	0.98	2.09	1.18	2.13	1.54	14.1
ODS 8	60	1 - 1 3/16	200	11.50	4.53	5.00	1.97	3.54	1.06	2.36	1.30	2.36	1.77	19.6
ODS 10	70	1 1/8 - 1 5/16	270	12.64	4.92	5.51	2.20	3.94	1.14	2.60	1.42	2.56	1.89	26
ODS 12	80	1 1/4 - 1 1/2	400	13.94	5.51	6.14	2.28	4.09	1.30	2.87	1.57	2.76	2.05	32.2
ODS 16	120	1 3/8 - 1 5/8	600	15.71	6.26	6.81	2.64	4.72	1.42	3.19	1.77	3.15	2.36	47.8
ODS 20	160	1 5/8 - 1 3/4	750	17.20	6.85	7.48	2.87	5.12	1.65	3.54	2.01	3.54	2.68	71
ODS 25	200	1 3/4 - 1 7/8	1000	19.21	7.48	8.46	3.27	5.91	2.48	3.94	2.17	3.94	2.83	104.7
ODS 32	250	1 15/16 - 2 1/4	1400	20.67	8.23	9.09	3.74	6.69	2.76	4.33	2.56	4.65	3.15	140
ODS 40	320	2 1/4 - 2 1/2	2000	23.46	9.33	10.35	4.21	7.48	3.11	4.92	2.95	5.20	3.54	176.4
ODS 50	400	2 7/16 - 2 5/8	2700	25.91	10.31	11.34	4.33	7.87	3.31	5.51	3.15	5.91	3.94	249.1


MBL = Minimum Breaking Load | **Mtons =** Metric tonnes

FINISH Hot-dip galvanised with zinc-nickel plated components | Primer RAL 170 60 45 (for ODS 10 - ODS 50)

OPEN JIS SOCKETS

MORE PRODUCT INFO

WITH BOLT

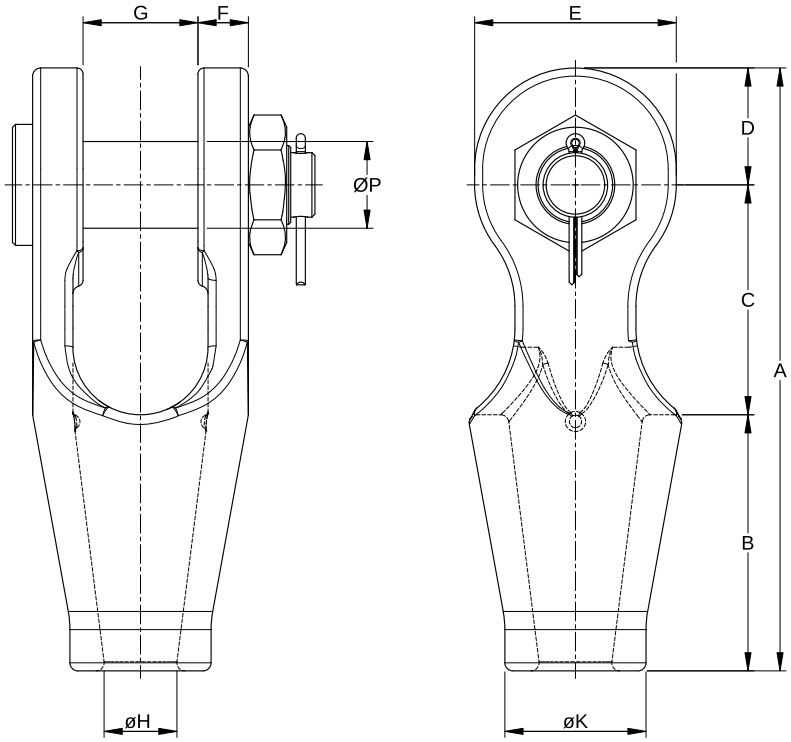

IMPERIAL

MODEL NUMBER	MBL (MTONS)	WIRE ROPE Ø (INCH)	APPROX. RESIN VOLUME (CC)	DIMENSIONS (INCH)										WEIGHT (LBS)
				A	B	C	D	E	F	G	ØH	ØK	ØP	
OJS 16	24	5/8	50	7.20	2.99	2.95	1.26	2.20	0.51	1.26	0.79	1.54	0.98	4.2
OJS 18	30	11/16	80	8.15	3.50	3.15	1.50	2.52	0.59	1.50	0.91	1.77	1.10	6.2
OJS 20	36	3/4	125	8.66	3.74	3.35	1.57	2.76	0.65	1.65	0.98	1.89	1.22	7.9
OJS 22	40	7/8	160	9.25	3.98	3.50	1.77	3.15	0.81	1.77	1.18	2.28	1.34	11.5
OJS 24	48	15/16	175	10.39	4.49	3.98	1.93	3.39	0.89	2.01	1.26	2.44	1.46	14.8
OJS 25	60	1	200	10.87	4.72	4.13	2.01	3.54	0.89	2.01	1.34	2.56	1.57	16.3
OJS 28	72	1 1/8	230	11.77	5.00	4.49	2.28	3.94	0.98	2.24	1.42	2.76	1.69	22.3
OJS 30	80	1 3/16	300	12.32	5.31	4.65	2.36	4.09	0.98	2.24	1.50	2.95	1.81	24.3
OJS 32	90	1 1/4	350	13.03	5.47	5.00	2.56	4.33	1.10	2.48	1.61	3.27	1.93	31.3
OJS 34	100	1 5/16	400	13.66	5.91	5.12	2.64	4.49	1.10	2.48	1.69	3.27	2.05	33.1
OJS 36	110	1 3/8	450	14.57	6.30	5.43	2.83	4.88	1.18	2.76	1.77	3.54	2.17	41.4
OJS 38	120	1 1/2	500	15.31	6.69	5.71	2.91	5.04	1.18	2.83	1.85	3.54	2.28	44.3
OJS 40	135	1 9/16	600	15.98	6.89	6.10	2.99	5.12	1.31	2.99	1.97	3.82	2.40	55.1
OJS 42	150	1 5/8	700	16.93	7.52	6.30	3.11	5.35	1.54	3.15	2.09	3.94	2.56	68.3


MBL = Minimum Breaking Load | **Mtons =** Metric tonnes


FINISH Hot-dip galvanised with zinc-nickel plated components

OPEN SPELTER SOCKETS


MORE PRODUCT INFO


WITH PIN

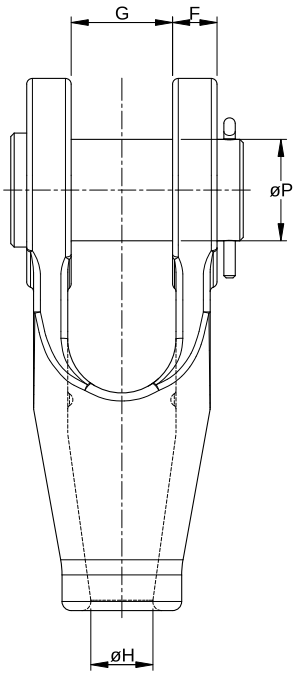

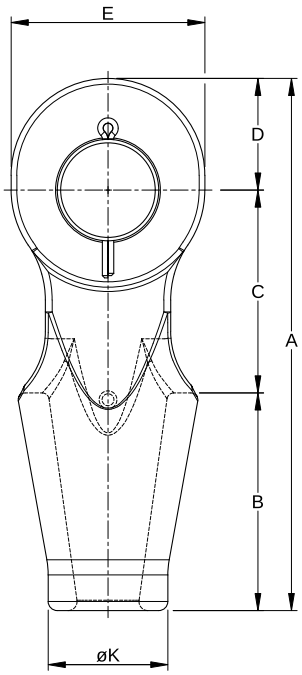

WITH BOLT

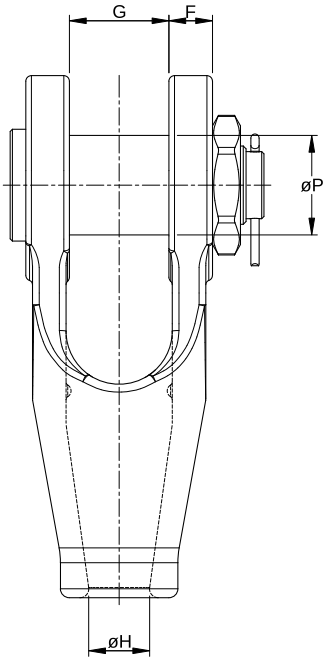

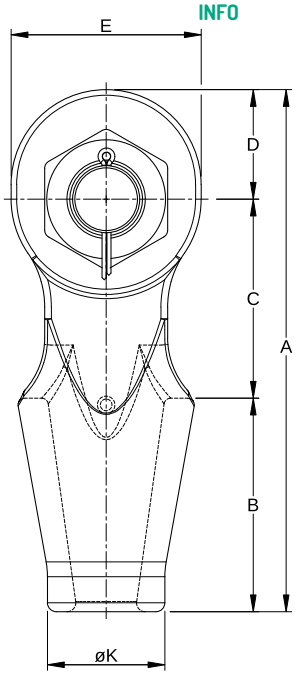

IMPERIAL

MODEL NUMBER	MBL (MTONS)	WIRE ROPE Ø (INCH)	STRUCTURAL STRAND Ø (INCH)	APPROX. RESIN VOLUME (CC)	DIMENSIONS (INCH)										WEIGHT (LBS)
					A	B	C	D	E	F	G	ØH	ØK	ØP	
OSS 196	8	1/4	-	10	4.13	1.81	1.57	0.75	1.34	0.35	0.71	0.39	0.79	0.69	1.3
OSS 197	12	5/16 - 3/8	-	23	4.80	2.13	1.77	0.91	1.57	0.44	0.81	0.53	1.02	0.81	2
OSS 198	20	7/16 - 1/2	-	37	5.59	2.52	2.01	1.06	1.89	0.50	1.01	0.59	1.18	1.00	2.9
OSS 199	25	9/16 - 5/8	1/2	52	6.73	2.99	2.48	1.26	2.20	0.57	1.26	0.73	1.52	1.18	4.4
OSS 100	40	3/4	9/16 - 5/8	91	8.07	3.50	2.99	1.57	2.68	0.65	1.50	0.89	1.81	1.38	7.3
OSS 104	55	7/8	11/16 - 3/4	145	9.37	3.98	3.50	1.89	3.15	0.81	1.77	1.06	2.17	1.61	11.9
OSS 108	80	1	13/16 - 7/8	172	10.75	4.49	3.98	2.28	3.86	0.89	2.01	1.16	2.44	2.01	18.3
OSS 111	100	1 1/8	15/16 - 1	224	12.05	5.00	4.49	2.56	4.33	0.98	2.24	1.34	2.76	2.24	24.3
OSS 115	130	1 1/4 - 1 3/8	1 1/16 - 1 1/8	370	13.31	5.47	5.00	2.83	4.88	1.10	2.48	1.57	3.27	2.48	35.9
OSS 118	160	1 1/2	1 3/16 - 1 1/4	462	15.51	5.98	6.38	3.15	5.51	1.18	2.99	1.75	3.54	2.76	51.1
OSS 120	200	1 5/8	1 5/16 - 1 3/8	549	16.34	6.50	6.50	3.35	5.83	1.32	2.99	1.89	3.82	2.99	63.7
OSS 125	250	1 3/4 - 1 7/8	1 7/16 - 1 5/8	783	18.39	7.52	7.01	3.86	6.69	1.54	3.50	2.09	4.41	3.50	86.6
OSS 128	300	2 - 2 1/8	1 11/16 - 1 3/4	1364	21.73	8.50	8.98	4.25	7.32	1.81	3.98	2.30	4.92	3.74	121.9
OSS 130	375	2 1/4 - 2 3/8	1 13/16 - 1 7/8	1538	23.74	9.02	10.00	4.72	8.27	2.09	4.45	2.70	5.31	4.25	168.7
OSS 132	450	2 1/2 - 2 5/8	1 15/16 - 2 1/8	2040	25.75	9.76	10.75	5.24	9.06	2.36	5.00	3.05	5.91	4.76	229.1
OSS 135	500	2 3/4 - 2 7/8	2 3/16 - 2 7/16	2338	27.40	10.98	10.98	5.43	9.45	2.87	5.24	3.27	6.30	5.00	295.4
OSS 138	600	3 - 3 1/8	2 1/2 - 2 5/8	3428	28.98	12.01	11.26	5.71	9.84	2.99	5.75	3.50	6.69	5.24	347.7
OSS 140	650	3 1/4 - 3 3/8	2 3/4 - 2 7/8	4392	31.10	12.99	11.81	6.30	10.83	3.11	6.26	3.74	7.09	5.51	435.2
OSS 142	750	3 1/2 - 3 5/8	3 - 3 1/8	5554	33.43	14.02	12.52	6.89	11.81	3.23	6.77	3.90	7.87	5.98	544.1
OSS 144	900	3 3/4 - 4	3 1/2 - 3 3/4	8219	36.30	15.00	13.50	7.80	13.23	3.50	7.52	4.33	8.46	7.01	738.5
OSS 145	1000	4 1/8 - 4 1/4	3 7/8 - 4	9000	39.17	15.98	15.00	8.19	14.02	3.74	7.99	4.65	9.45	7.28	1016.3
OSS 146	1200	4 1/4 - 4 1/2	4 1/8 - 4 3/8	10500	43.70	17.32	17.72	8.66	14.57	3.94	8.07	5.04	9.84	7.68	1166.2
OSS 150	1400	4 3/4 - 5	4 7/16 - 4 3/4	14000	46.65	19.29	17.32	10.04	16.93	4.45	8.86	5.63	10.63	8.66	1547.6
OSS 155	1700	5 5/16 - 5 1/2	4 7/8 - 5 1/8	23587	49.41	21.06	18.11	10.24	17.32	4.72	9.45	6.22	11.81	9.45	1715.2
OSS 160	2000	5 9/16 - 6	5 1/4 - 5 5/8	30657	53.74	23.03	19.88	10.83	19.69	5.51	9.84	6.77	12.99	10.04	1937.9
OSS 165	2250	6 1/16 - 6 1/2	5 11/16 - 6 1/16	38556	57.48	24.80	20.87	11.81	21.65	5.91	10.24	7.32	14.17	10.83	2381
OSS 170	2500	6 9/16 - 7	6 1/8 - 6 9/16	48234	61.42	26.77	22.44	12.20	22.44	5.91	11.02	7.87	15.75	11.61	2700.7
OSS 175	2800	7 1/16 - 7 1/2	6 9/16 - 7 1/16	58605	64.96	28.54	23.62	24.61	23.62	6.10	11.81	8.43	17.32	12.20	3152.6
OSS 180	3200	7 9/16 - 8	7 1/16 - 7 1/2	72096	68.50	30.51	24.80	13.58	25.20	6.30	12.60	9.06	19.09	12.99	3703.8


MBL = Minimum Breaking Load | **Mtons =** Metric tonnes | Assembly weights may vary depending on the selected configuration

FINISH Hot-dip galvanised with zinc-nickel plated components | Primer RAL 170 60 45 (for OSS 111 - OSS 180)

GLOBAL ROPE FITTINGS
AQUALLINE PRODUCTS

OPEN STRAND SPELTER SOCKETS

MORE PRODUCT INFO

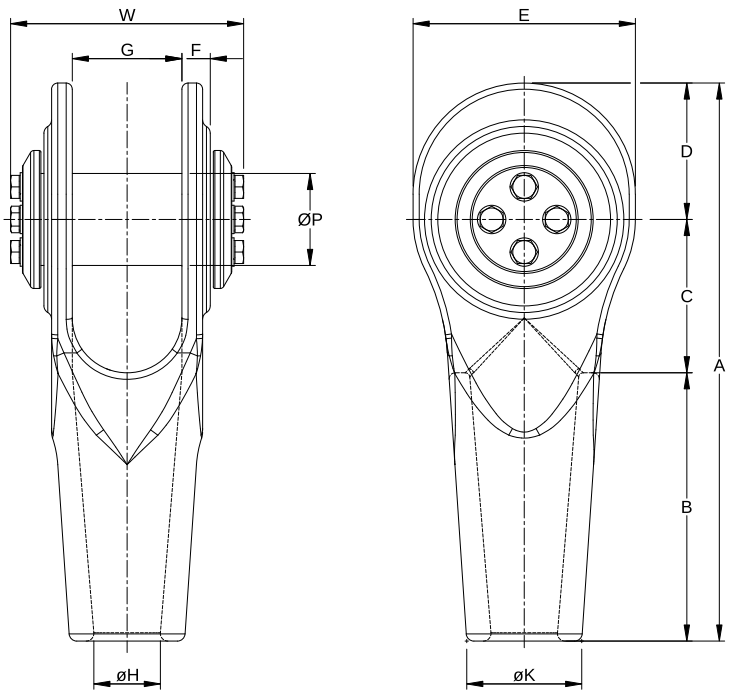

IMPERIAL

MODEL NUMBER	MBL (MTONS)	STRUCTURAL STRAND Ø (INCH)	APPROX. RESIN VOLUME (CC)	DIMENSIONS (INCH)											WEIGHT (LBS)
				A	B	C	D	E	F	G	ØH	ØK	ØP	W	
OSSS 420	50	3/4	100	8.86	3.94	2.76	2.17	3.54	0.49	1.81	1.06	1.89	1.57	4.72	7.7
OSSS 425	70	1	160	10.83	4.92	3.15	2.60	4.33	0.57	2.24	1.26	2.24	1.77	5.31	13.2
OSSS 430	100	1 1/8	220	12.52	5.91	3.54	3.07	5.12	0.69	2.68	1.46	2.60	2.17	6.30	22
OSSS 435	125	1 3/8	400	13.98	6.89	3.74	3.35	5.51	0.77	2.91	1.73	3.07	2.36	6.89	33.1
OSSS 440	175	1 5/8	800	15.55	7.87	4.13	3.74	6.30	0.87	3.31	1.93	3.39	2.56	7.28	39.7
OSSS 445	225	1 3/4	1200	17.56	8.86	4.53	4.17	6.93	0.94	3.62	2.24	3.86	2.95	8.27	59.5
OSSS 450	280	2	1600	19.80	9.84	5.12	4.84	7.87	1.02	4.09	2.44	4.25	3.35	9.06	77.2
OSSS 455	360	2 1/8	2000	22.05	10.83	5.91	5.31	8.66	1.10	4.41	2.64	4.57	3.54	9.84	114.6
OSSS 460	450	2 3/8	2500	24.13	11.81	6.50	5.83	9.45	1.18	4.88	2.91	5.12	3.94	10.43	154.3
OSSS 465	500	2 1/2	3000	26.57	12.80	7.28	6.50	10.63	1.30	5.20	3.15	5.51	4.33	11.02	189.6
OSSS 470	560	2 3/4	4000	28.66	13.78	7.87	7.01	11.42	1.46	5.63	3.43	5.91	4.72	11.81	242.5
OSSS 475	600	3	5000	30.91	14.76	8.66	7.48	12.20	1.54	6.22	3.62	6.38	5.12	13.39	352.7
OSSS 480	700	3 1/4	6000	32.99	15.75	9.25	7.99	12.99	1.77	6.61	3.86	6.81	5.51	14.17	418.9
OSSS 485	800	3 1/3	7000	35.24	16.54	10.24	8.46	13.78	2.01	7.01	4.09	7.40	5.71	15.75	507.1
OSSS 490	900	3 1/2	8000	37.40	17.32	10.83	9.25	14.96	2.24	7.48	4.37	8.19	6.06	16.73	606.3
OSSS 495	1000	3 3/4	9000	40.94	17.72	12.99	10.24	16.14	2.44	7.80	4.72	10.04	6.46	17.72	771.6

MBL = Minimum Breaking Load | **Mtons =** Metric tonnes


FINISH Hot-dip galvanised with zinc-nickel plated components | Primer RAL 170 60 45

GLOBAL ROPE FITTINGS
AQUALLINE PRODUCTS

UNIVERSAL CONNECTOR SOCKETS

MORE PRODUCT INFO

WITH BOLT

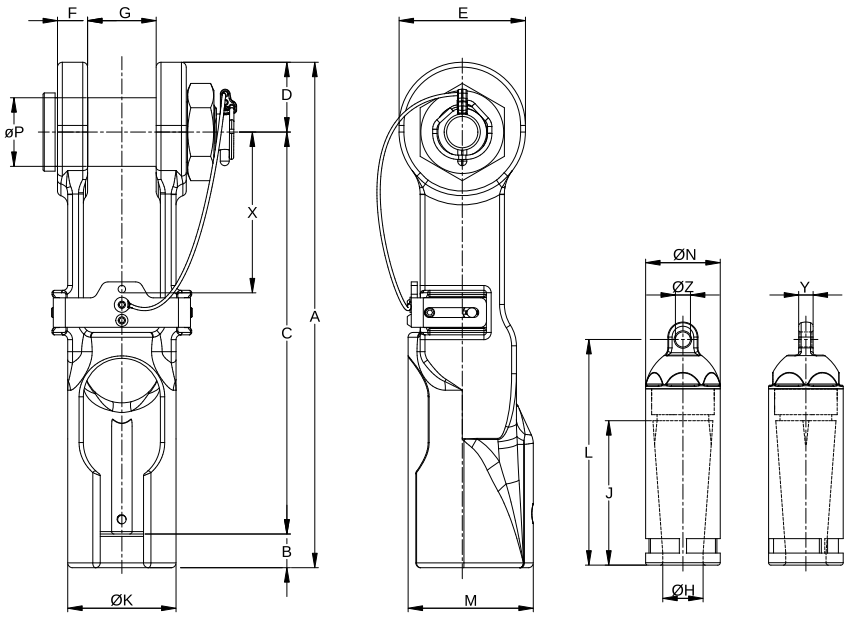

IMPERIAL


MODEL NUMBER	MBL (MTONS)	WIRE ROPE Ø (INCH)	APPROX. RESIN VOLUME (CC)	DIMENSIONS (INCH)																	WEIGHT (LBS)
				A	B	C	D	E	F	G	ØH	J	ØK	L	M	ØN	ØP	X	Y	ØZ	
UCS 902	25	1/2 - 5/8	50	9.25	0.63	7.44	1.18	2.20	0.57	1.26	0.75	3.50	1.97	4.45	2.28	1.32	1.18	2.64	0.31	0.31	6
UCS 903	40	2/3 - 3/4	80	10.75	0.71	8.66	1.42	2.56	0.65	1.57	0.87	3.94	2.36	4.96	2.76	1.54	1.38	3.35	0.39	0.41	9.9
UCS 904	55	7/8	125	12.68	0.87	10.16	1.65	3.07	0.81	1.89	1.04	4.41	2.72	5.67	3.15	1.77	1.61	4.09	0.47	0.47	16.5
UCS 905	80	1	160	15.04	0.98	12.01	2.05	3.78	0.89	2.28	1.16	5.28	3.15	6.73	3.66	2.09	2.01	4.88	0.47	0.47	26.7
UCS 906	100	1 1/8	210	16.54	1.10	13.15	2.28	4.13	0.98	2.56	1.32	5.79	3.54	7.40	4.09	2.44	2.24	5.71	0.47	0.47	35.5


MBL = Minimum Breaking Load | **Mtons =** Metric tonnes

FINISH Zinc-nickel plated with additional primer RAL 170 60 45 on connector tube

CLOSED WEDGE SOCKETS

MORE PRODUCT INFO

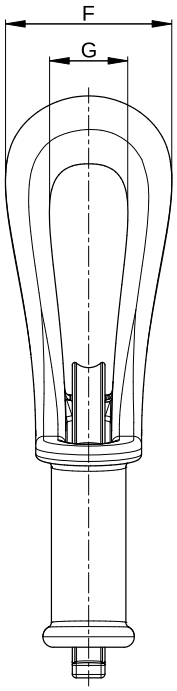

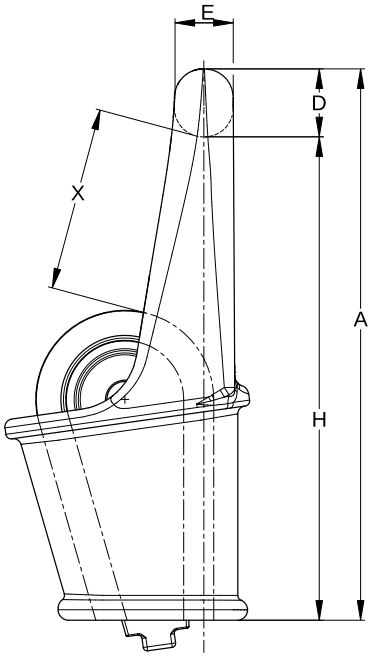

IMPERIAL

MODEL NUMBER	MBL (MTONS)	WIRE ROPE Ø (INCH)	DIMENSIONS (INCH)							WEIGHT (LBS)
			A	D	E	F	G	H	X	
CWS 303	40	3/4	12.48	1.57	1.42	3.94	1.65	10.91	3.94	16.5
CWS 304	55	7/8	14.49	1.77	1.57	4.53	1.97	12.72	4.33	25.4
CWS 305	80	1	16.61	2.05	1.77	5.12	2.36	14.57	4.92	38.4
CWS 306	100	1 1/8	18.62	2.28	1.97	5.91	2.56	16.34	5.51	85.3
CWS 307	120	1 1/4	20.43	2.44	2.17	6.30	2.83	17.99	6.30	101.9
CWS 308	130	1 3/8	22.83	2.60	2.36	6.61	2.99	20.24	6.89	84.7
CWS 309	160	1 1/2	24.41	2.83	2.60	6.89	3.23	21.57	7.48	108
CWS 310	200	1 5/8	26.18	3.15	2.83	7.68	3.54	23.03	8.27	138.2
CWS 311	250	1 3/4 - 1 7/8	29.53	3.54	3.15	8.66	3.94	25.98	9.45	205
CWS 312	300	2	32.28	3.94	3.54	9.53	4.33	28.35	10.24	260.1
CWS 313	375	2 1/4	35.04	4.17	3.74	10.04	4.72	30.87	11.02	374.8
CWS 314	450	2 1/2	41.14	4.72	4.13	11.02	5.12	36.42	12.99	529.1
CWS 315	600	3	47.24	5.51	4.72	12.99	5.91	41.73	15.75	837.8
CWS 316	650	3 1/4 - 3 3/8	52.76	6.10	5.12	14.76	6.69	46.65	18.70	1080.3

MBL = Minimum Breaking Load | **Mtons =** Metric tonnes | **X =** Depending on the actual wire rope diameter, rope construction and fill factor


FINISH Hot-dip galvanised | Primer RAL 170 60 45

GLOBAL ROPE FITTINGS
AQUALLINE PRODUCTS


OPEN WEDGE SOCKETS

MORE PRODUCT INFO

WITH PIN

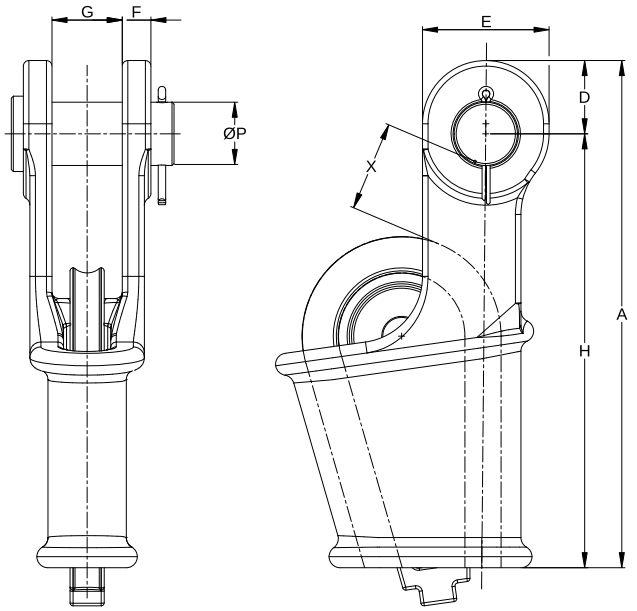

WITH BOLT

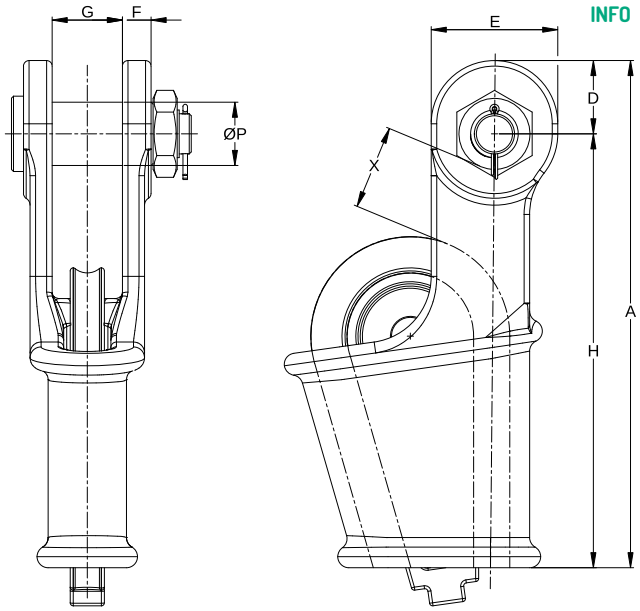

IMPERIAL

MODEL NUMBER	MBL (MTONS)	WIRE ROPE Ø (INCH)	DIMENSIONS (INCH)								WEIGHT (LBS)
			A	D	E	F	G	H	ØP	X	
OWS 0.15	5	3/16 - 1/4	3.98	0.67	1.18	0.31	0.67	3.31	0.63	1.38	0.9
OWS 0.25	8	5/16	5.12	0.79	1.34	0.35	0.71	4.33	0.69	1.57	1.8
OWS 0.5	12	3/8	5.91	0.91	1.57	0.43	0.81	4.92	0.81	1.77	3.1
OWS 1	20	7/16 - 1/2	7.20	1.06	1.89	0.50	1.01	6.14	1.00	2.36	5.3
OWS 2	25	9/16 - 5/8	8.82	1.26	2.20	0.57	1.26	7.56	1.18	2.56	8.4
OWS 3	40	3/4	10.71	1.57	2.68	0.65	1.50	9.13	1.38	2.76	14.1
OWS 4	55	7/8	12.28	1.89	3.15	0.81	1.77	10.39	1.61	3.15	21.6
OWS 5	80	1	14.57	2.28	3.94	0.89	2.01	12.28	2.01	3.54	32.6
OWS 6	100	1 1/8	16.26	2.56	4.33	0.98	2.24	13.70	2.24	3.94	48.1
OWS 7	120	1 1/4	17.91	2.83	4.88	1.10	2.48	15.12	2.48	4.33	67.2
OWS 8	130	1 3/8	20.00	2.99	5.20	1.10	2.76	17.01	2.48	4.92	83.1
OWS 9	160	1 1/2	21.57	3.15	5.51	1.18	2.99	18.43	2.76	5.51	109.1
OWS 10	200	1 5/8	23.19	3.35	5.91	1.42	2.99	19.84	2.99	6.10	137.8
OWS 11	250	1 3/4 - 1 7/8	26.54	3.86	6.69	1.54	3.50	22.68	3.50	6.89	207.5
OWS 12	300	2	28.86	4.25	7.32	1.81	3.98	24.61	3.74	7.68	266.8
OWS 13	375	2 1/4	32.13	4.72	8.27	2.09	4.45	27.40	4.25	8.66	370.4
OWS 14	450	2 1/2	37.40	5.24	9.06	2.36	5.00	32.17	4.76	9.84	648.2
OWS 15	600	3	41.61	5.71	9.84	2.99	5.75	35.91	5.24	11.02	828.5
OWS 16	650	3 1/4 - 3 3/8	45.67	6.30	10.83	3.11	6.26	39.37	5.51	12.99	1022.1
OWS 17	750	3 1/2 - 3 5/8	50.08	7.09	12.20	3.35	6.89	43.31	6.10	14.76	1433
OWS 18	900	3 5/8 - 3 3/4	55.12	7.87	13.78	3.54	7.52	47.24	7.01	16.77	2023.8

MBL = Minimum Breaking Load | **Mtons =** Metric tonnes | **X =** Depending on the actual wire rope diameter, rope construction and fill factor
Assembly weights may vary depending on the selected configuration


FINISH Hot-dip galvanised with zinc-nickel plated components | Primer RAL 170 60 45 (for OWS 4 - OWS 18)


GLOBAL ROPE FITTINGS
AQUALLINE PRODUCTS

OPEN WEDGE SOCKETS WITH INTEGRATED TAIL CLAMP


MORE PRODUCT INFO


WITH PIN

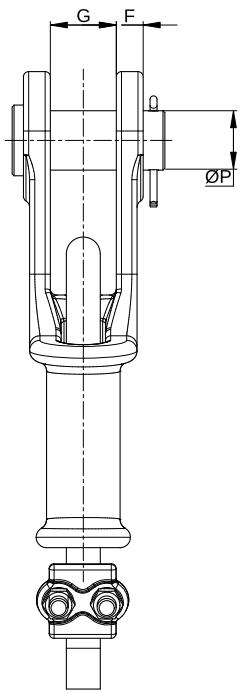

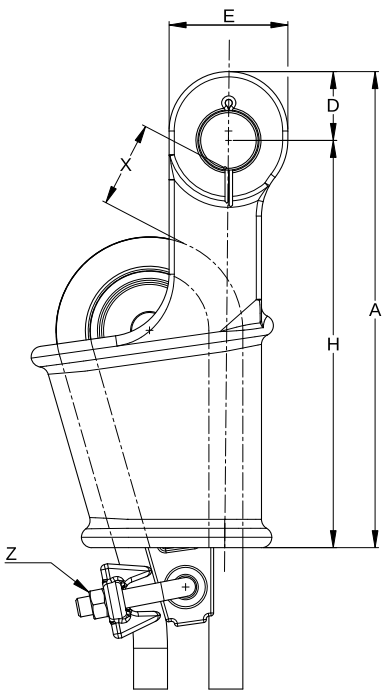

WITH BOLT

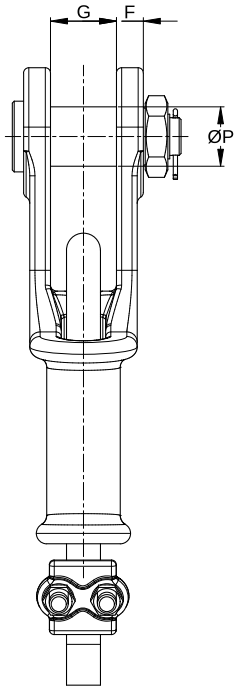

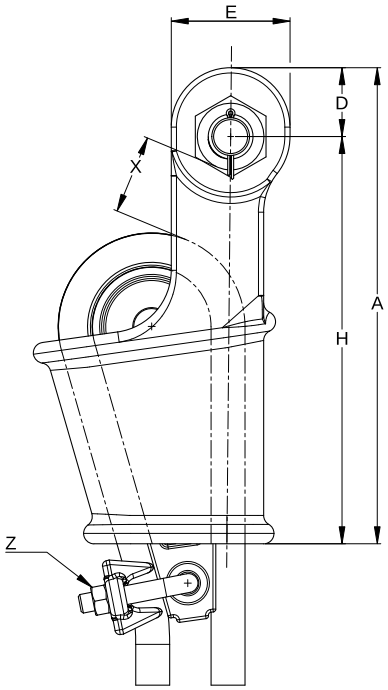

IMPERIAL

MODEL NUMBER	MBL (MTONS)	WIRE ROPE Ø (INCH)	DIMENSIONS (INCH)								WIRE ROPE CLIP SIZE	WEIGHT (LBS)
			A	D	E	F	G	H	ØP	X	Z	
OWS ITC 0.15	5	3/16 - 1/4	3.98	0.67	1.18	0.31	0.67	3.31	0.63	1.38	WRC 5	1.3
OWS ITC 0.25	8	5/16	5.12	0.79	1.34	0.35	0.71	4.33	0.69	1.57	WRC 8	2.2
OWS ITC 0.5	12	3/8	5.91	0.91	1.57	0.43	0.81	4.92	0.81	1.77	WRC 10	3.7
OWS ITC 1	20	7/16 - 1/2	7.20	1.06	1.89	0.50	1.01	6.14	1.00	2.36	WRC 13	6.2
OWS ITC 2	25	9/16 - 5/8	8.82	1.26	2.20	0.57	1.26	7.56	1.18	2.56	WRC 16	9.7
OWS ITC 3	40	3/4	10.71	1.57	2.68	0.65	1.50	9.13	1.38	2.76	WRC 19	15.9
OWS ITC 4	55	7/8	12.28	1.89	3.15	0.81	1.77	10.39	1.61	3.15	WRC 22	24.3
OWS ITC 5	80	1	14.57	2.28	3.94	0.89	2.01	12.28	2.01	3.54	WRC 26	35.7
OWS ITC 6	100	1 1/8	16.26	2.56	4.33	0.98	2.24	13.70	2.24	3.94	WRC 29	50.9
OWS ITC 7	120	1 1/4	17.91	2.83	4.88	1.10	2.48	15.12	2.48	4.33	WRC 32	73
OWS ITC 8	130	1 3/8	20.00	2.99	5.20	1.10	2.76	17.01	2.48	4.92	WRC 35	89.1


MBL = Minimum Breaking Load | **Mtons =** Metric tonnes | **X =** Depending on the actual wire rope diameter, rope construction and fill factor
Assembly weights may vary depending on the selected configuration

FINISH Hot-dip galvanised with zinc-nickel plated components | Primer RAL 170 60 45 (for OWS ITC 4 - OWS ITC 8)

GLOBAL ROPE FITTINGS
AQUALLINE PRODUCTS

ADJUSTABLE CLOSED TURNBUCKLE SOCKETS

MORE PRODUCT INFO

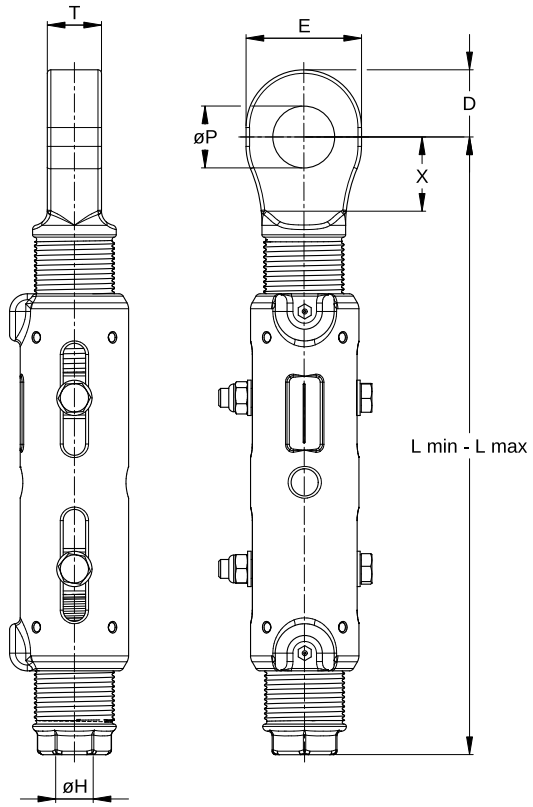

IMPERIAL

MODEL NUMBER	MBL (MTONS)	WIRE ROPE Ø (INCH)	APPROX. RESIN VOLUME (CC)	DIMENSIONS (INCH)									WEIGHT (LBS)
				D	E	ØH	ØP	T	X	L MIN	L MAX	ADJUSTMENT RANGE	
ACTS 800	40	3/4	80	1.57	2.68	0.89	1.44	1.34	2.17	13.19	17.52	4.33	17
ACTS 804	55	7/8	125	1.89	3.15	1.06	1.67	1.57	2.36	14.96	20.08	5.12	24.3
ACTS 808	80	1	160	2.28	3.86	1.16	2.09	1.77	2.95	17.13	23.03	5.90	34.4
ACTS 811	100	1 1/8	210	2.52	4.25	1.34	2.32	2.05	3.35	19.29	25.98	6.69	51.8
ACTS 815	130	1 1/4 - 1 3/8	350	2.83	4.88	1.57	2.56	2.28	3.94	23.03	30.51	7.48	70.1
ACTS 818	160	1 1/2	425	3.27	5.51	1.75	2.83	2.99	4.13	24.80	32.68	7.88	99.2
ACTS 820	200	1 5/8	500	3.35	5.83	1.89	3.07	2.99	4.53	26.77	35.43	8.66	132.3
ACTS 825	250	1 3/4 - 1 7/8	700	3.86	6.69	2.09	3.58	3.23	5.31	31.89	41.73	9.84	194


MBL = Minimum Breaking Load | **Mtons =** Metric tonnes

FINISH Zinc-nickel plated with additional primer RAL 170 60 45 on connector tube


ADJUSTABLE OPEN TURNBUCKLE SOCKETS

MORE PRODUCT INFO

WITH PIN

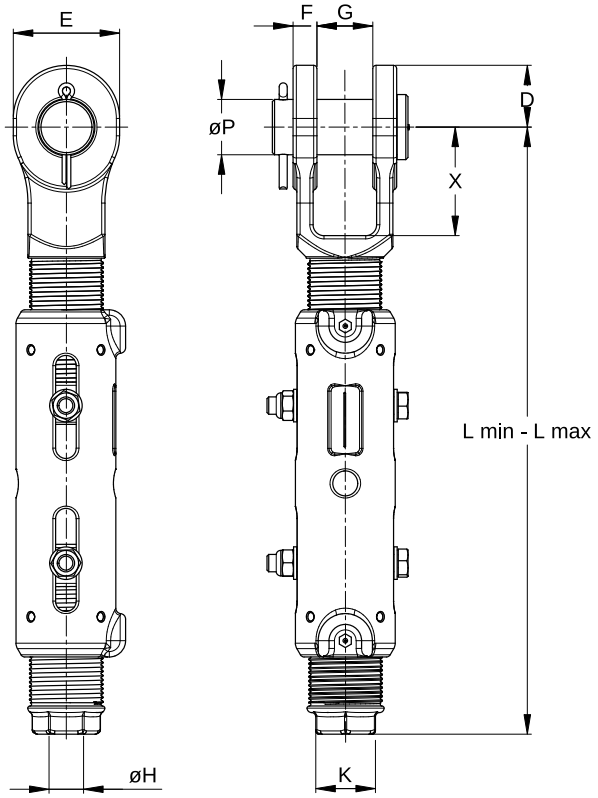

WITH BOLT

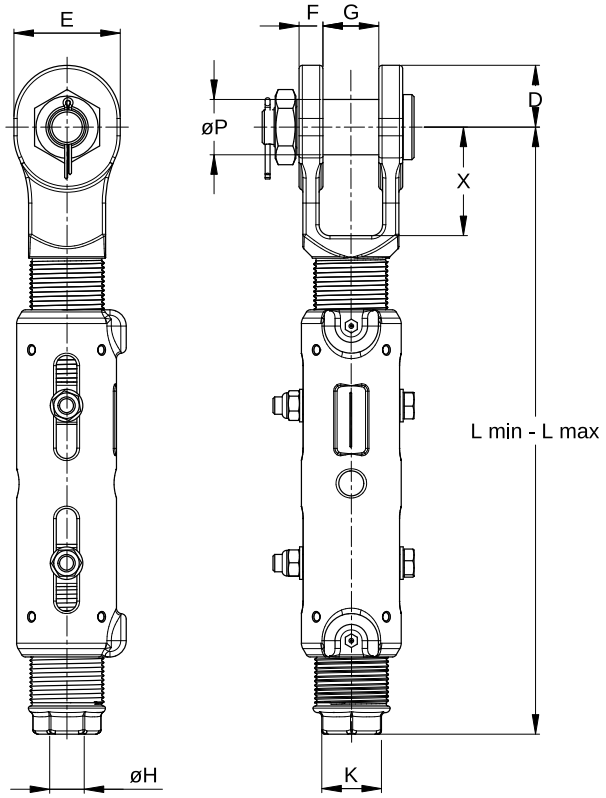

IMPERIAL

MODEL NUMBER	MBL (MTONS)	WIRE ROPE Ø (INCH)	APPROX. RESIN VOLUME (CC)	DIMENSIONS (INCH)											WEIGHT (LBS)
				D	E	F	G	ØH	K	ØP	X	L MIN	L MAX	ADJUSTMENT RANGE	
AOTS 800	40	3/4	80	1.77	2.91	0.65	1.50	0.89	1.61	1.38	2.17	13.39	17.72	4.33	19.2
AOTS 804	55	7/8	125	2.09	3.54	0.81	1.77	1.06	1.97	1.61	2.44	15.35	20.47	5.12	23.4
AOTS 808	80	1	160	2.24	3.86	0.89	2.01	1.16	2.17	2.01	3.94	18.31	25.20	6.89	38.1
AOTS 811	100	1 1/8	210	2.64	4.49	0.98	2.24	1.34	2.56	2.24	3.35	19.88	27.76	7.88	51.2
AOTS 815	130	1 1/4 - 1 3/8	350	3.03	5.31	1.10	2.48	1.57	2.95	2.48	3.74	23.62	31.10	7.48	84.7
AOTS 818	160	1 1/2	425	3.27	5.75	1.18	2.99	1.75	3.15	2.76	4.13	25.59	33.46	7.87	101.4
AOTS 820	200	1 5/8	500	3.50	6.14	1.30	2.99	1.89	3.54	2.99	4.53	27.56	36.22	8.66	127.9
AOTS 825	250	1 3/4 - 1 7/8	700	4.02	7.01	1.54	3.50	2.09	3.94	3.50	5.31	32.48	42.32	9.84	189.6

MBL = Minimum Breaking Load | **Mtons =** Metric tonnes | Assembly weights may vary depending on the selected configuration


FINISH Zinc-nickel plated with additional primer RAL 170 60 45 on connector tube

GLOBAL ROPE FITTINGS
AQUALLINE PRODUCTS


ADJUSTABLE OPEN SPELTER SOCKETS

MORE PRODUCT INFO

WITH PIN

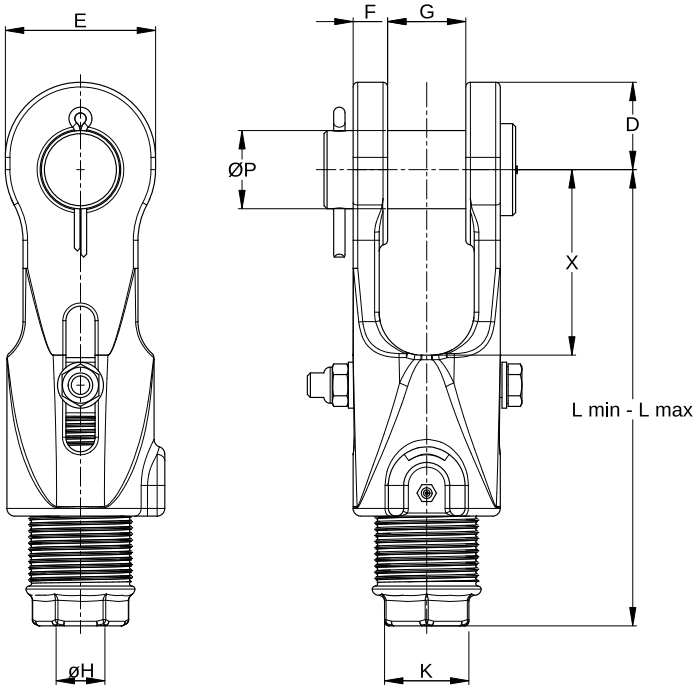

WITH BOLT

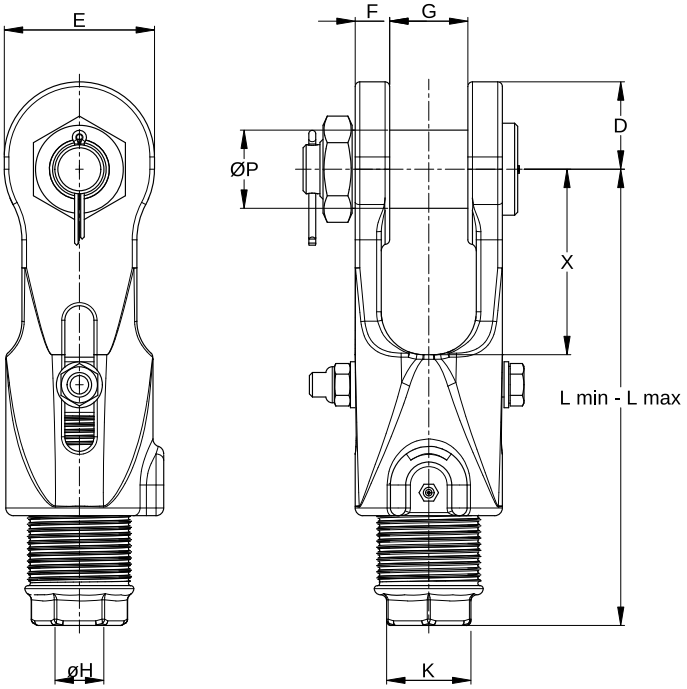

IMPERIAL

MODEL NUMBER	MBL (MTONS)	WIRE ROPE Ø (INCH)	APPROX. RESIN VOLUME (CC)	DIMENSIONS (INCH)											WEIGHT (LBS)
				D	E	F	G	ØH	K	ØP	X	L MIN	L MAX	ADJUSTMENT RANGE	
AOSS 800	40	3/4	80	1.77	2.91	0.65	1.50	0.89	1.61	1.38	3.54	7.28	9.45	2.17	11
AOSS 804	55	7/8	125	2.09	3.54	0.81	1.77	1.06	1.97	1.61	3.94	8.15	10.71	2.56	17.6
AOSS 808	80	1	160	2.24	3.86	0.89	2.01	1.16	2.17	2.01	4.72	9.65	12.60	2.95	26.5
AOSS 811	100	1 1/8	210	2.64	4.49	0.98	2.24	1.34	2.56	2.24	5.12	11.02	14.96	3.94	37.5
AOSS 815	130	1 1/4 - 1 3/8	350	3.03	5.31	1.10	2.48	1.57	2.95	2.48	5.91	12.80	16.34	3.54	50.7
AOSS 818	160	1 1/2	425	3.27	5.75	1.18	2.99	1.75	3.15	2.76	6.69	14.57	18.50	3.93	72.8
AOSS 820	200	1 5/8	500	3.50	6.14	1.30	2.99	1.89	3.54	2.99	7.09	15.75	20.08	4.33	88.2
AOSS 825	250	1 3/4 - 1 7/8	700	4.02	7.01	1.54	3.50	2.09	3.94	3.50	8.46	19.09	23.82	4.73	132.3


MBL = Minimum Breaking Load | **Mtons =** Metric tonnes | Assembly weights may vary depending on the selected configuration

FINISH Hot-dip galvanised with zinc-nickel plated components

GLOBAL ROPE FITTINGS
AQUALLINE PRODUCTS

TURNBUCKLES
EYE-EYE

MORE PRODUCT INFO

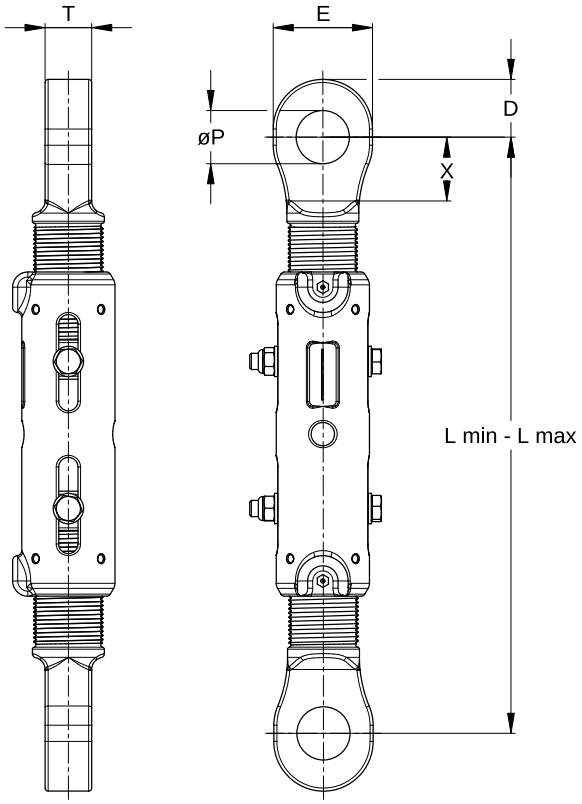

IMPERIAL

MODEL NUMBER	WLL (MTONS)	MBL (MTONS)	DIMENSIONS (INCH)								WEIGHT (LBS)
			D	E	L MIN	L MAX	ADJUSTMENT RANGE	ØP	T	X	
TBL 800-EE	8	40	1.57	2.68	15.35	19.69	4.34	1.38	1.34	2.17	19.2
TBL 804-EE	11	55	1.89	3.15	17.13	22.24	5.11	1.61	1.57	2.36	28.7
TBL 808-EE	16	80	2.28	3.86	19.69	25.59	5.90	2.01	1.77	2.95	42.1
TBL 811-EE	20	100	2.52	4.25	21.65	29.53	7.88	2.24	2.05	3.35	61.7
TBL 815-EE	26	130	2.83	4.88	25.98	33.46	7.48	2.48	2.48	3.94	83.8
TBL 818-EE	32	160	3.27	5.51	28.35	36.22	7.87	2.76	2.99	4.13	105.8
TBL 820-EE	40	200	3.35	5.83	30.51	39.17	8.66	2.99	2.99	4.53	132.3
TBL 825-EE	50	250	3.86	6.69	36.22	46.06	9.84	3.50	3.23	5.31	187.4


WLL = Working Load Limit | **MBL =** Minimum Breaking Load | **Mtons =** Metric tonnes

FINISH Zinc-nickel plated with additional primer RAL 170 60 45 on connector tube


TURNBUCKLES
EYE-JAW

MORE PRODUCT INFO

WITH PIN

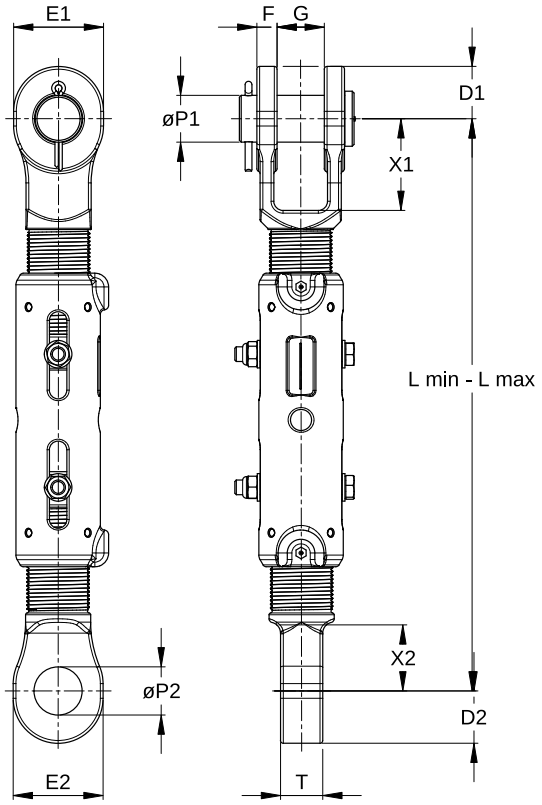

WITH BOLT

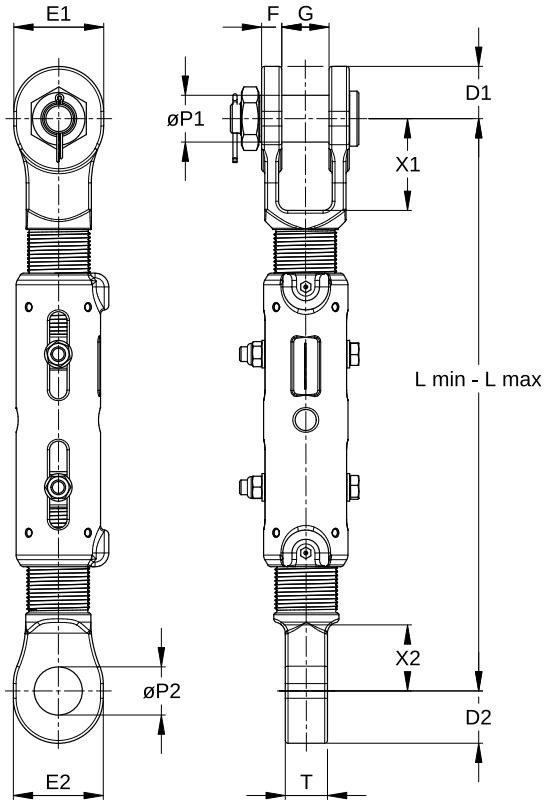

IMPERIAL

"MODEL NUMBER"	WLL (MTONS)	MBL (MTONS)	DIMENSIONS (INCH)														WEIGHT (LBS)
			D1	E1	F	G	ØP1	X1	L MIN	L MAX	ADJUSTMENT RANGE	D2	E2	ØP2	X2	T	
TBL 800-EJ	8	40	1.77	2.91	0.65	1.50	1.38	2.17	16.14	20.47	4.33	1.57	2.68	1.38	2.17	1.34	19.8
TBL 804-EJ	11	55	2.09	3.54	0.81	1.77	1.61	2.44	18.11	23.23	5.12	1.89	3.15	1.61	2.36	1.57	33.1
TBL 808-EJ	16	80	2.52	4.25	0.89	2.01	2.01	3.94	20.87	26.77	5.90	2.28	3.86	2.01	2.95	1.77	43.4
TBL 811-EJ	20	100	2.64	4.49	0.98	2.24	2.24	3.35	23.62	31.50	7.88	2.52	4.25	2.24	3.35	2.05	62.6
TBL 815-EJ	26	130	3.03	5.31	1.10	2.48	2.48	3.74	26.38	33.86	7.48	2.83	4.88	2.48	3.94	2.48	90.4
TBL 818-EJ	32	160	3.27	5.75	1.18	2.99	2.76	4.13	28.94	36.81	7.87	3.27	5.51	2.76	4.13	2.99	121.3
TBL 820-EJ	40	200	3.50	6.14	1.30	2.99	2.99	4.53	31.10	39.76	8.66	3.35	5.83	2.99	4.53	2.99	154.3
TBL 825-EJ	50	250	4.02	7.01	1.54	3.50	3.50	5.31	36.81	46.65	9.84	3.86	6.69	3.50	5.31	3.23	209.4


WLL = Working Load Limit | **MBL =** Minimum Breaking Load | **Mtons =** Metric tonnes
Assembly weights may vary depending on the selected configuration

FINISH Zinc-nickel plated with additional primer RAL 170 60 45 on connector tube


TURNBUCKLES
JAW-JAW

MORE PRODUCT INFO

WITH PIN

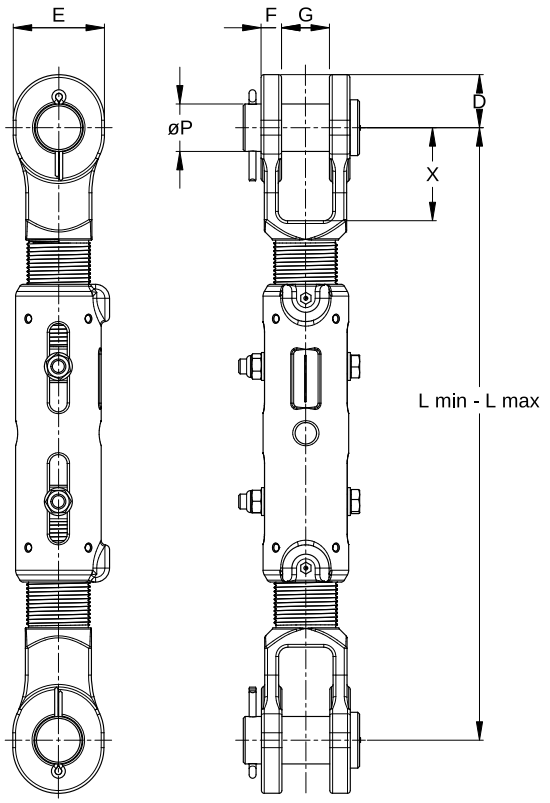

WITH BOLT

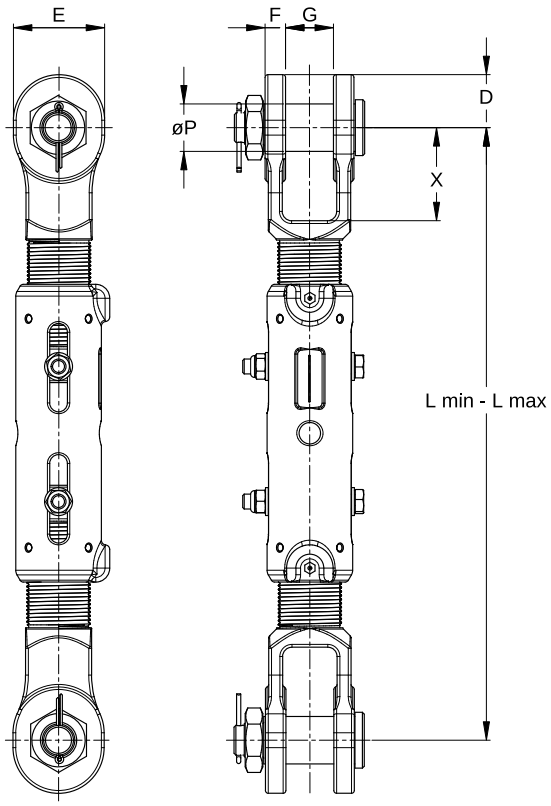

IMPERIAL


MODEL NUMBER	WLL (MTONS)	MBL (MTONS)	DIMENSIONS (INCH)									WEIGHT (LBS)
			D	E	F	G	L MIN	L MAX	ADJUSTMENT RANGE	ØP	X	
TBL 800-JJ	8	40	1.77	2.91	0.65	1.50	16.93	21.26	4.33	1.38	2.17	20.5
TBL 804-JJ	11	55	2.09	3.54	0.81	1.77	18.90	24.02	5.12	1.61	2.44	35.3
TBL 808-JJ	16	80	2.52	4.25	0.89	2.01	22.24	28.15	5.91	2.01	3.94	41.4
TBL 811-JJ	20	100	2.64	4.49	0.98	2.24	25.59	33.46	7.87	2.24	3.35	61.5
TBL 815-JJ	26	130	3.03	5.31	1.10	2.48	27.56	35.04	7.48	2.48	3.74	93.9
TBL 818-JJ	32	160	3.27	5.75	1.18	2.99	29.53	37.40	7.87	2.76	4.13	121.3
TBL 820-JJ	40	200	3.50	6.14	1.30	2.99	31.89	40.55	8.66	2.99	4.53	154.3
TBL 825-JJ	50	250	4.02	7.01	1.54	3.50	37.40	47.24	9.84	3.50	5.31	209.4


WLL = Working Load Limit | **MBL =** Minimum Breaking Load | **Mtons =** Metric tonnes
Assembly weights may vary depending on the selected configuration

FINISH Zinc-nickel plated with additional primer RAL 170 60 45 on connector tube

HEAVY DUTY TRIANGLE PLATES

MORE PRODUCT INFO

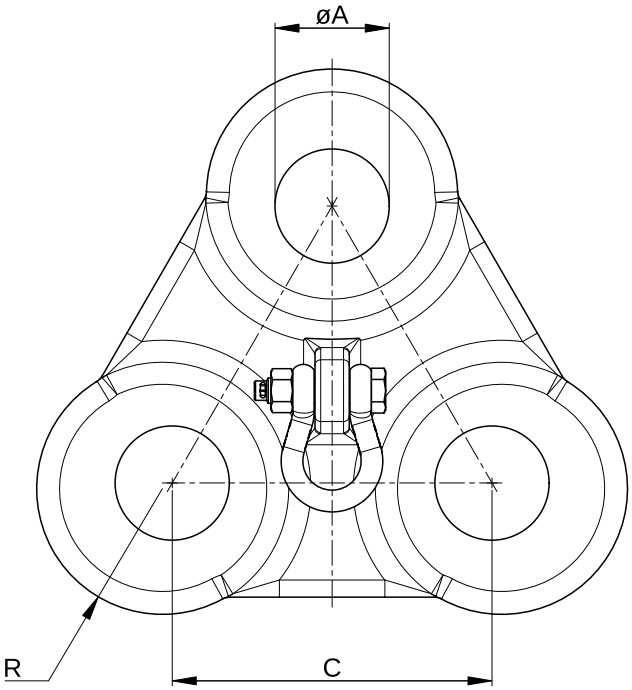

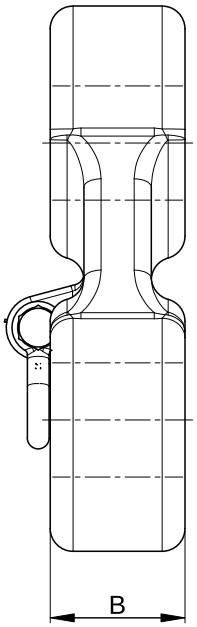

IMPERIAL


MODEL NUMBER	WLL (MTONS)	MBL (MTONS)	DIMENSIONS (INCH)				WEIGHT (LBS)
			ØA	B	C	R	
HDTP 9.5	9.5	50	1.38	1.57	4.33	1.77	11
HDTP 12	12	70	1.50	1.65	4.72	1.89	16.5
HDTP 13.5	13.5	80	1.61	1.89	5.12	1.97	17.6
HDTP 17	17	100	1.81	2.05	5.51	2.17	28
HDTP 25	25	125	2.13	2.36	6.10	2.56	36.2
HDTP 35	35	175	2.44	2.76	6.89	2.95	56
HDTP 55	55	275	2.99	3.54	8.27	3.54	101.4
HDTP 85	85	425	3.46	3.94	9.45	4.13	152.1
HDTP 120	120	600	3.94	4.65	11.02	4.72	233.7
HDTP 150	150	750	4.53	5.59	12.20	5.31	361.6
HDTP 200	200	1000	5.51	5.91	14.96	6.69	575.4
HDTP 250	250	1250	5.91	6.30	16.73	7.09	760.6
HDTP 300	300	1500	6.30	7.01	17.72	7.60	959
HDTP 400	400	2000	7.32	8.07	18.90	8.46	1499.1
HDTP 500	500	2500	7.87	8.86	20.08	9.45	1896

WLL = Working Load Limit | **MBL =** Minimum Breaking Load | **Mtons =** Metric tonnes

FINISH Hot-dip galvanised | Primer RAL 170 60 45

SOLID WIRE ROPE THIMBLES

MORE PRODUCT INFO

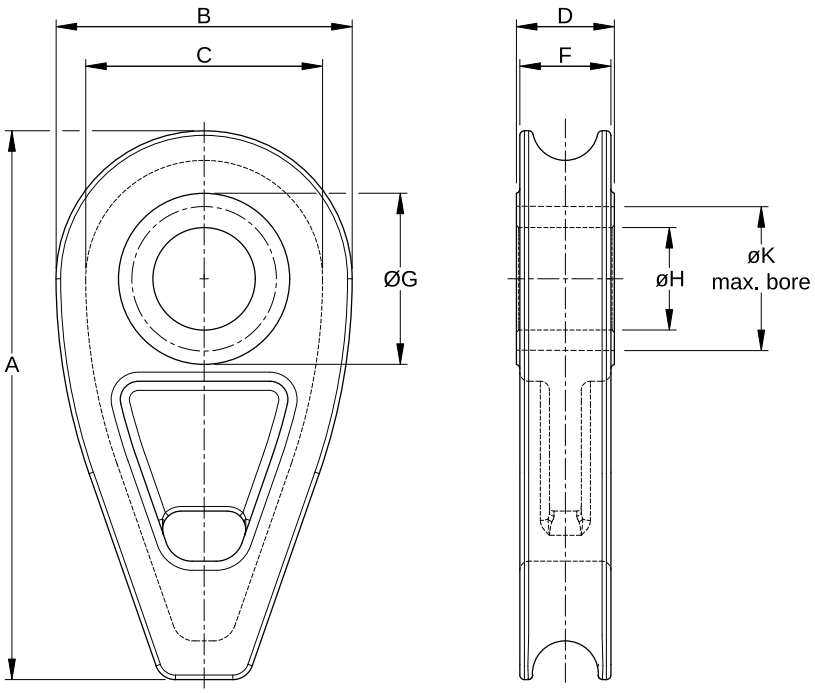

IMPERIAL

MODEL NUMBER	WIRE ROPE Ø (INCH)	DIMENSIONS (INCH)								WEIGHT (LBS)
		A	B	C	D	F	ØG	ØH	ØK	
SWRT 8	5/16	2.91	1.57	1.26	0.61	0.55	1.10	0.55	0.87	0.4
SWRT 10	3/8	3.62	1.97	1.57	0.71	0.65	1.26	0.71	1.06	0.9
SWRT 12	1/2	4.33	2.36	1.89	0.81	0.75	1.57	0.83	1.34	1.3
SWRT 14	9/16	5.04	2.76	2.20	0.94	0.89	1.77	0.98	1.50	2
SWRT 16	5/8	5.75	3.15	2.52	1.06	0.98	1.97	1.10	1.69	2.6
SWRT 18	11/16	6.57	3.54	2.83	1.14	1.06	2.13	1.22	1.93	3.1
SWRT 20	3/4	7.13	3.94	3.15	1.26	1.18	2.28	1.38	2.05	4.4
SWRT 22	7/8	8.03	4.33	3.46	1.34	1.26	2.56	1.57	2.32	5.3
SWRT 24	15/16	8.74	4.72	3.78	1.46	1.38	2.76	1.65	2.44	7.3
SWRT 26	1	9.25	5.12	4.09	1.57	1.46	2.95	1.77	2.68	8.8
SWRT 28	1 1/8	10.20	5.51	4.41	1.69	1.57	3.15	1.89	2.83	11
SWRT 32	1 1/4	11.69	6.30	5.04	1.85	1.73	3.54	2.09	3.23	14.3
SWRT 36	1 3/8	13.15	7.09	5.67	2.13	2.01	3.94	2.36	3.54	22
SWRT 40	1 1/2	14.41	7.87	6.30	2.36	2.20	4.65	2.56	4.13	27.6
SWRT 44	1 3/4	15.87	8.66	6.93	2.52	2.36	4.92	2.76	4.41	36.4
SWRT 48	1 7/8	17.32	9.45	7.56	2.76	2.60	5.51	2.99	4.92	55.6
SWRT 52	2	18.74	10.24	8.19	2.95	2.80	5.91	3.23	5.31	59.5
SWRT 56	2 1/4	20.24	11.02	8.82	3.23	3.07	6.30	3.46	5.71	85.5
SWRT 64	2 1/2	23.07	12.60	10.08	3.62	3.46	7.09	3.74	6.50	110.2
SWRT 72	2 3/4	25.94	14.17	11.34	4.06	3.86	7.87	4.13	7.09	154.3
SWRT 80	3	28.35	15.75	12.60	4.53	4.29	8.66	4.53	7.87	220.5


K = Maximum machined diameter

FINISH Hot-dip galvanised | Primer RAL 170 60 45 (for SWRT 22 - SWRT 80)

GLOBAL ROPE FITTINGS
AQUALLINE PRODUCTS

WIRE ROPE CLIPS

MORE PRODUCT INFO

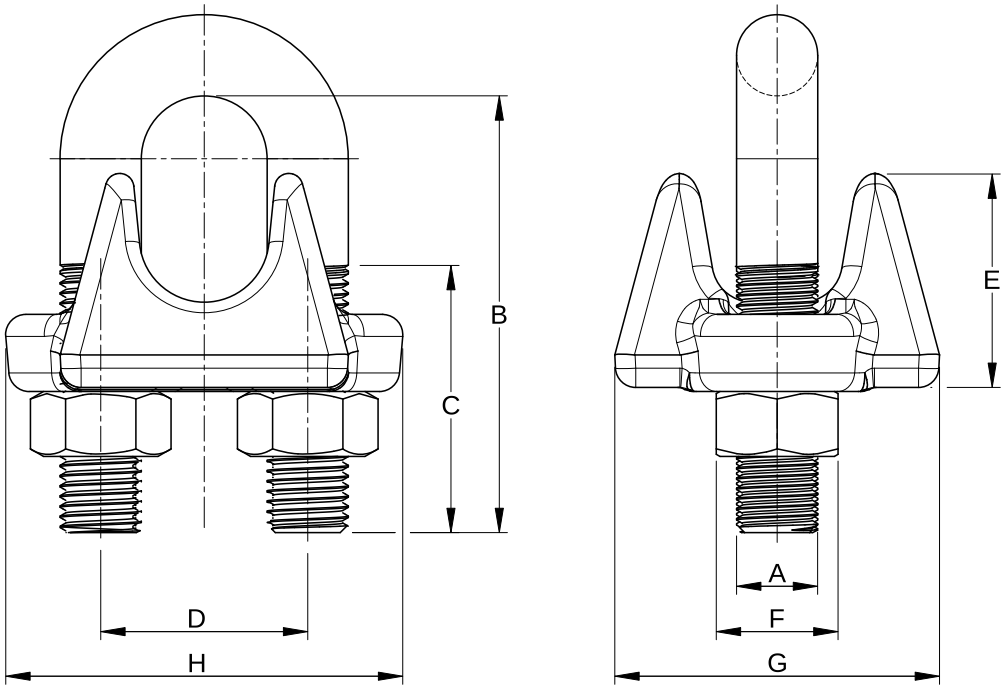

IMPERIAL

MODEL NUMBER	WIRE ROPE Ø (INCH)	TORQUE (LB-FT)	DIMENSIONS (INCH)								WEIGHT (LBS)
			A	B	C	D	E	F	G	H	
WRC 4	1/8	4.5	0.22	0.72	0.44	0.47	0.41	0.38	0.81	0.94	0.1
WRC 5	3/16	7.5	0.25	0.97	0.56	0.59	0.50	0.44	0.94	1.16	0.1
WRC 6	1/4	15	0.31	1.03	0.56	0.75	0.66	0.56	1.19	1.44	0.2
WRC 8	5/16	30	0.38	1.38	0.75	0.88	0.72	0.69	1.31	1.69	0.3
WRC 10	3/8	45	0.44	1.50	0.75	1.00	0.91	0.75	1.63	1.94	0.5
WRC 11	7/16	65	0.50	1.88	1.00	1.19	1.03	0.88	1.81	2.28	0.7
WRC 13	1/2	65	0.50	1.88	1.00	1.19	1.13	0.88	1.91	2.28	0.7
WRC 14	9/16	96	0.56	2.25	1.26	1.31	1.22	0.94	2.06	2.50	1
WRC 16	5/8	96	0.56	2.38	1.26	1.31	1.34	0.94	2.06	2.50	1
WRC 19	3/4	131	0.62	2.75	1.44	1.50	1.41	1.06	2.25	2.84	1.4
WRC 22	7/8	226	0.75	3.12	1.62	1.75	1.59	1.25	2.44	3.16	2.2
WRC 26	1	226	0.75	3.50	1.81	1.88	1.78	1.25	2.63	3.47	2.4
WRC 29	1 1/8	226	0.75	3.88	2.00	2.01	1.91	1.25	2.81	3.59	2.8
WRC 32	1 1/4	361	0.88	4.25	2.13	2.30	2.19	1.44	3.13	4.13	4.2
WRC 35	1 3/8	361	0.88	4.63	2.31	2.38	2.31	1.44	3.13	4.17	4.4
WRC 38	1 1/2	361	0.88	4.94	2.38	2.60	2.44	1.44	3.41	4.45	5.2
WRC 42	1 5/8	431	1.00	5.31	2.62	2.76	2.66	1.63	3.63	4.76	6.8
WRC 44	1 3/4	590	1.13	5.75	2.76	3.07	2.95	1.81	3.81	5.28	9.3
WRC 52	2	738	1.25	6.46	2.99	3.39	3.19	2.00	4.45	5.87	12.8
WRC 57	2 1/4	738	1.25	7.13	3.19	3.92	3.27	2.00	4.49	6.38	16.1
WRC 64	2 1/2	738	1.25	7.68	3.43	4.13	3.70	2.00	4.65	6.61	18.2
WRC 70	2 3/4	738	1.25	8.31	3.54	4.37	4.88	2.00	5.00	6.89	23.1
WRC 76	3	1202	1.50	9.17	3.90	4.72	4.96	2.38	5.87	7.64	31.3
WRC 89	3 1/2	1202	1.50	10.75	4.49	5.51	5.98	2.38	6.18	8.39	37.7

FINISH Hot-dip galvanised

GLOBAL ROPE FITTINGS
AQUALLINE PRODUCTS