



A standard in-line 4mm banana plug with a stainless steel contact spring.
The large rear diameter of this plug will accept cables with a conductor of up 5.5mm (10 awg). The lead wire can be held either by soldering in a large solder bucket, or by a set screw. When the cable is held by the set screw, the solder bucket can also be crimped for added strength, (suitable crimping tool - Daniels Manufacturing D36 Hydraulic Crimper).
Available in 2 colour options

The product is also supplied with a large diameter insulating cover that accepts cables with a maximum outside diameter of 7.1mm.

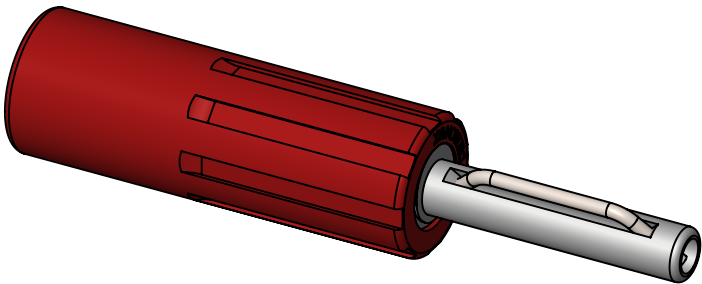

Dimensions

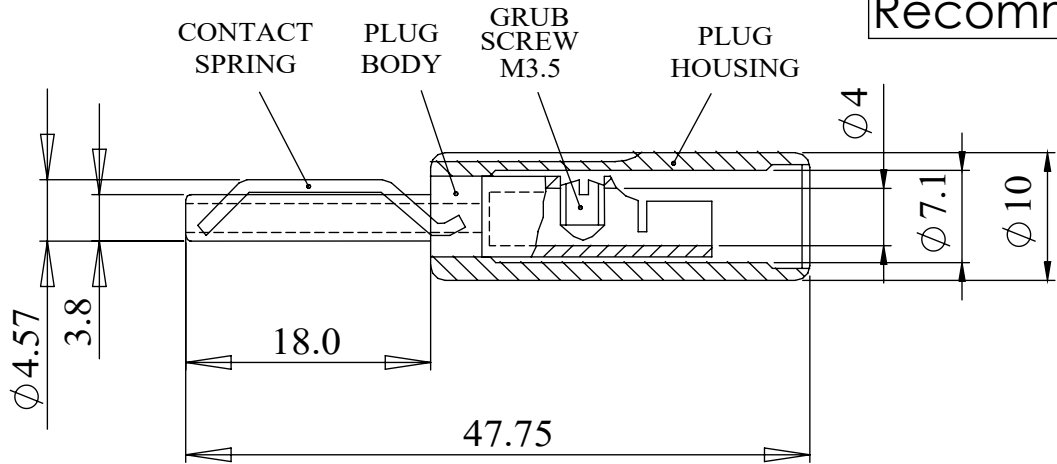

Materials

Contact Spring	Stainless steel BS 302
Plug body	Brass TR! CZ 131
Body Plating	Flash Silver Plating
Grub Screw	Brass BS 2874
Insulation housing	Acetal

Properties

Rating	16 amps
Voltage	50 Volts MAX
Recommended Cable size	5.5mm (10awg)

Part Number	Colour
583-0100	Black
583-0500	Red