


A durable three pin panel plug, with solder lug / spade terminals. Can be mounted above the panel on any thickness of material or below the panel for up to 2,0mm thick material. Suitable for use measuring instruments, SMPS, ITE and OA.
Weight approximately 10g.
Approvals cULus, KC, CCC, VDE, CE.
MFR P/N DAC-11H

Dimensions

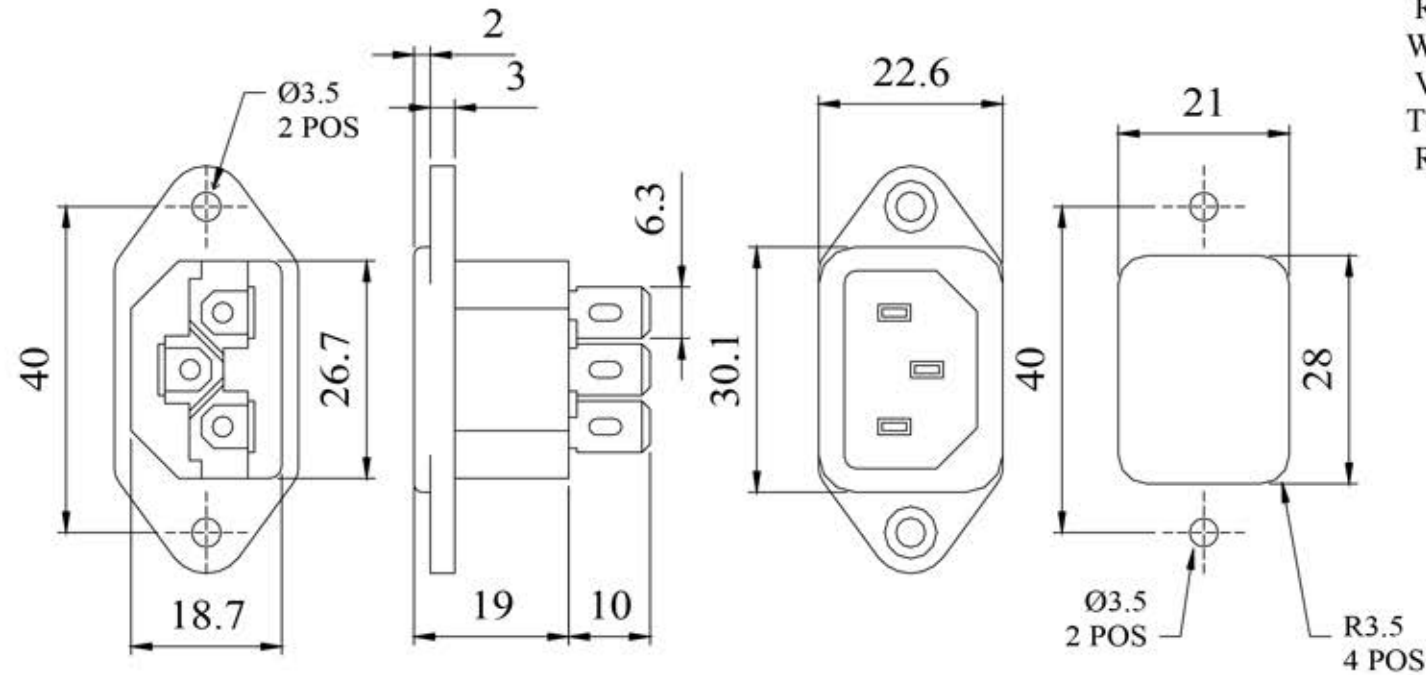

MATERIAL HOUSING	: Nylon 66, black UL 94 V0
CONTACTS	: Brass, nickel plate
ELECTRICAL	
Voltage Rating	: 250 Vac
Current Rating	: 10 Amps
Insulation	: 1000 MΩ @500 Vac
Resistance	
Withstanding Voltage	: 2000 Vac for 1 minute between line to gnd.
Temperature Range	: -20°C to +80°C