



Tree Tag

Quick Start Guide


Tools



Smartphone
with NFC



List of plants
you would like to
monitor



Power Drill



Hand Nut Driver




Drill Bit (#28)




Nut Driver Bit (1/4")

What's in the box?

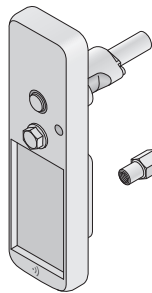


ePlant
Tree Tags
Qty 10




Tree
Mounting Screws
Qty 11

Know your Tree Tag

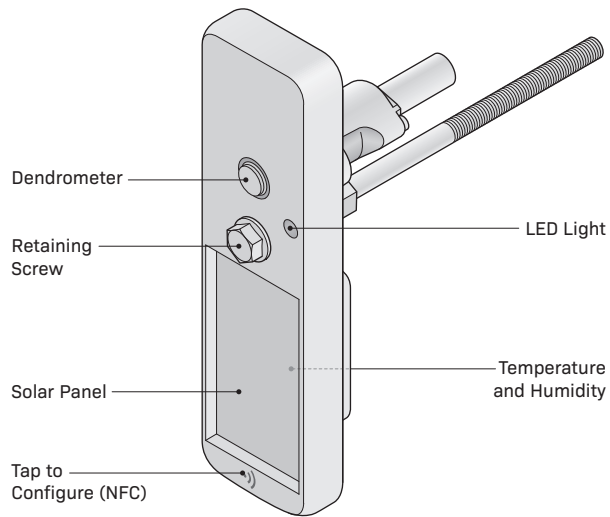

1) Charge your Tree Tags in the Sun.

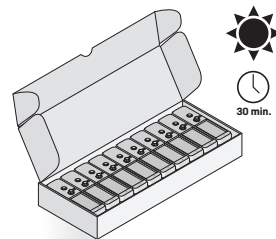

2) Download App.




3) Log in - see email from:
no-reply@verificationemail.com




Not received?
Contact: support@eplant.bio


4) Select a flat and solid
measurement spot.

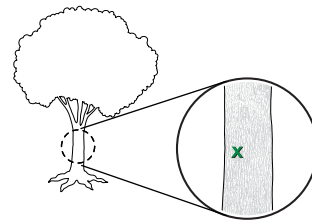


- 5) Brush off loose bark.
- 6) Drill the hole 13 mm below measurement spot.




- 7) Using a Nut Driver Bit, screw the tree mounting screw into the hole (7a) to the end of the threaded section (7b).



- 8) Attach Tree Tag onto rod using fastening screw (8a). Tighten using a Hand Nut Driver (8b). Back of plunger will protrude 1mm from the face of the Tree Tag (8c).

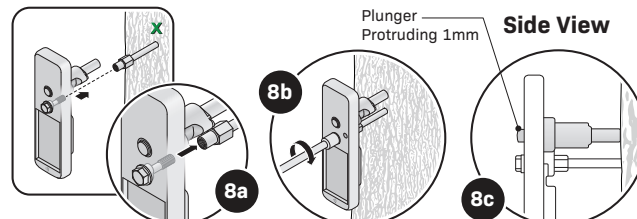

- 9) Use app to start your Tree Tag and identify the plant.

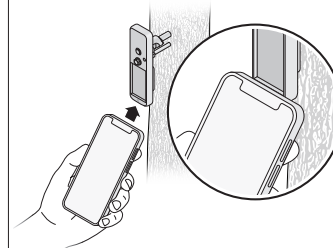

Questions



+1 (650) 947-9920
support@eplant.bio
www.eplant.bio

LED Key

- NFC scanned - Short pulse green
- Start received, attempting to connect to network - Flashing amber
- Started, good radio connection - Flashing green
- Started, okay radio connection - Flashing alternatively amber and green
- Started, poor radio connection - Flashing alternatively red and green
- No radio connection established after 1.5 minutes - Flashing red for 2 minutes
- Stop received - Flashing red twice
- System error, contact ePlant support - Flashing red every 5 seconds

Caution

Cleaning Notes: Clean with warm water and soft cloth.

- No detergents
- No alcohol
- No solvents