

POWER YOUR ADVENTURES

ONAN P2500i

2,500-Watt Digital Inverter Gasoline Portable Generator
2,200 Running Watts | 2,500 Peak Watts



DIGITAL INVERTER GENERATOR

Efficient, clean energy that requires little maintenance



PARALLEL CAPABLE

Parallels with another P2500i, 4500i, or p4500iDF generator



QUIET & DURABLE

Double insulated



LIGHTWEIGHT

Easy to carry



KEEPS YOU CONNECTED

Low THD for clean power – perfect for sensitive electronics



FUEL EFFICIENT

1-gallon fuel tank that runs 10 hrs at 25% load

FEATURES

- Built-in carry handle for easy transportation
- Two 5V USB ports for charging sensitive electronics, such as phones or tablets
- Rubber outlet dust covers
- Dependable 98cc OHV 4-stroke Cummins Onan engine
- Rubber mat on top for storing electronic devices, such as phones, while charging
- 3-year warranty




**FOR
A WORLD
THAT'S
ALWAYS ON™**

SPECIFICATIONS

Part Number	A058U944
Gasoline Peak Watts	2,500
Gasoline Running Watts	2,200
Peak Amps at 120V	20.8 amps
Running Amps at 120V	18.3 amps
AC Voltage	120 volts
DC Voltage	5 volts
AC Frequency	60 Hz
Parallel Capable	Yes
Total Harmonic Distortion (THD)	≤3%
Starting System	Recoil
Battery	No
Engine Displacement	98cc
Engine Brand	Cummins Onan
Engine Type	OHV 4-stroke
Engine Speed	Variable
Engine RPM Max	5,500
Available in True Timber Camo	Yes
Operational Volume	As low as 52 dBA
Spark Plug (included)	Torch E6RTC
Carburetor Kit Required to Operate at Altitude	Yes, above 2,000 ft
Economy Mode Switch	Yes
Built-in Inverter	Yes
Engine Lubrication	Splash
Recommended Oil	SAE 10W30
Oil Bottle Size (included)	.37 qt / 11.8 oz
Oil Capacity (Quarts/Ounces)	.37 qt / 11.8 oz
Low Oil Shutdown	Automatic
Fuel Type	Unleaded Gasoline, 10% Ethanol or less
Fuel Shut Off	Manual
Fuel Tank Material	Steel
Fuel Tank Capacity (Gallons/Liters)	1 gal (3.8 L)
Run Time at 25% Load (hrs)	10 hrs
Run Time at 50% Load (hrs)	8 hrs
Gasoline Fuel Gauge	Yes
Choke type	Manual
Choke Location	Control Panel
AC Outlets	(1) Duplex 120V 20A (5-20R)
DC Outlets	(2) 5V USB ports (1) 12V 8A outlet
Ground	Floating Neutral
Covered Outlets	Yes
Manual Transfer Switch Ready	No

GFCI Outlets	No
LED Data Center	Yes
Overload Protection (circuit breaker)	Yes
Handle Style	Single, molded in case
Wheel Kit	No
Emissions	EPA, CARB
Canada CSA Compliant	Yes
Spark Arrestor	Yes
Residential Warranty	3 Years
Commercial Warranty	1 Year
Assembled Length in (mm)	19.75 in (501.65 mm)
Assembled Width in (mm)	10.5 in (266.7 mm)
Assembled Height in (mm)	18.25 in (463.55 mm)
Carton Length in (mm)	21.5 in (546 mm)
Carton Width in (mm)	12.75 in (323.85 mm)
Carton Height in (mm)	18.75 in (490 mm)
Dry Unit Weight lb (kg)	48 lb (21 kg)
Shipping Weight lb (kg)	56 lb (24 kg)

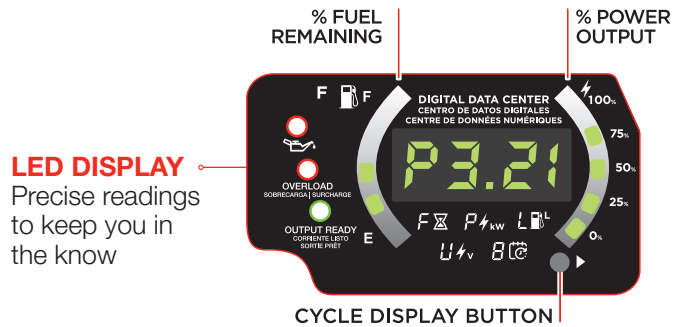

Display Information

F9.31	P1.21	2.8L	U122	22:31
REMAINING RUN TIME	POWER OUTPUT (kW)	FUEL LEVEL (Liters)	VOLTAGE	LIFETIME RUN HOURS



Cummins Inc.
Box 3005
Columbus, IN 47202-3005
U.S.A.

cummins.com

Bulletin 5300163 Produced in U.S.A. Rev. 3/22
©2022 Cummins Inc.

POWER YOUR WORLD

ONAN P4500i

4,500-Watt Digital Inverter Gasoline Portable Generator
3,700 Running Watts | 4,500 Peak Watts



United States and Canada Model



DIGITAL INVERTER GENERATOR

Efficient, clean energy that requires little maintenance



PUSH BUTTON & REMOTE START

Pull cord backup



QUIET & DURABLE

Double insulated



PARALLEL CAPABLE

Parallels with another P4500i, P4500iDF, or P2500i generator



FUEL-EFFICIENT

3.4-gallon fuel tank that runs 18 hrs at 25% load



LIGHTWEIGHT

At 98 lbs, and with a telescoping handle and wheels, it's lighter and easier to manage

FEATURES

- RV- and camper-ready with 30A TT-30R outlet
- Two 5V USB ports for charging sensitive electronics, such as phones or tablets
- Telescoping handle for easy transportation
- Dependable 224cc OHV 4-Stroke Cummins Onan engine
- 3-year warranty




**FOR
A WORLD
THAT'S
ALWAYS ON™**

SPECIFICATIONS

Part Number	A058U955
Gasoline Peak Watts	4,500
Gasoline Running Watts	3,700
Peak Amps at 120V	37.5 amps
Running Amps at 120V	30.8 amps
AC Voltage	120 volts
DC Voltage	5 volts
AC Frequency	60 Hz
Parallel Capable	Yes
Total Harmonic Distortion (THD)	≤3%
Starting System	Electric, remote, recoil
Battery Included	Yes
Battery Charger Included	Yes
Remote Start Fob Included	Yes (paired at factory)
Remote Start Distance (yards/meters)	109 yd (100 m)
Engine Displacement	224cc
Engine Brand	Cummins Onan
Engine Type	OHV 4-stroke
Engine Speed	Variable
Operational Volume	As low as 52 dBA
Carburetor Kit Required to Operate at Altitude	Yes, above 2,000 ft
Economy Mode Switch	Yes
Built-In Inverter	Yes
Engine Lubrication	Splash
Recommended Oil	SAE 10W-30
Oil Bottle Size (included)	.63 qt / 20.3 oz
Oil Capacity (quarts/ounces)	.63 qt / 20.3 oz
Low Oil Shutdown	Automatic
Fuel Type	Unleaded gasoline, 10% ethanol or less
Fuel Shut Off	Manual
Fuel Tank Material	Steel
Fuel Tank Capacity (gallons/liters)	3.4 gal (12.8 L)
Run Time at %25 Load (hrs)	18 hrs
Run Time at %50 Load (hrs)	15 hrs
Gasoline Fuel Gauge	Yes
Choke type	Automatic
AC Outlets	(1) 120V 30A (TT-30R) (1) Duplex 120V 20A (5-20R)
DC Outlets	(2) 5V USB ports
Ground	Floating neutral
Covered Outlets	Yes

Manual Transfer Switch Ready	No
GFCI Outlets	No
LED Data Center	Yes
RV-Ready Outlet	Yes
Overload Protection (circuit breaker)	Yes
Handle Style	Telescoping handle
Emissions	EPA, CARB
Canada CSA Compliant	Yes
Wheel Kit Included	Yes (assembled)
Wheel Size	5.5 in diameter, 1.5 in thick
Spark Arrestor	Yes
Residential Warranty	3 Years
Commercial Warranty	1 Year
Assembled Length in (mm)	24.5 in (622 mm)
Assembled Width in (mm)	18.25 in (463 mm)
Assembled Height in (mm)	20.5 in (520 mm)
Carton Length in (mm)	30.3 in (768 mm)
Carton Width in (mm)	19.5 in (495 mm)
Carton Height in (mm)	21 in (533 mm)
Dry Unit Weight lb (kg)	98 lb (44 kg)
Shipping Weight lb (kg)	104 lb (47 kg)

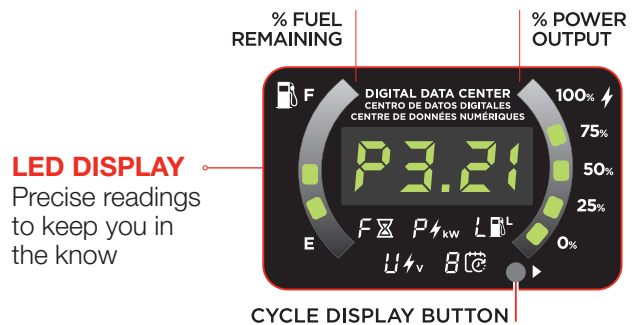

Display Information

F9.31	P1.21	2.8L	112.2	22:31
REMAINING RUN TIME	POWER OUTPUT (kW)	FUEL LEVEL (Liters)	VOLTAGE	LIFETIME RUN HOURS



Cummins Inc.
Box 3005
Columbus, IN 47202-3005
U.S.A.

cummins.com

POWER WHEN YOU NEED IT MOST

ONAN P9500DF

9,500-Watt Dual Fuel (Gas/LPG) Portable Generator

Gas: 7,500 Running Watts | 9,500 Peak Watts

Propane: 6,750 Running Watts | 8,550 Peak Watts



PUSH BUTTON & REMOTE START

Pull cord backup



DUAL FUEL WITH JUST THE FLIP OF A SWITCH



Easily switch from gas to propane with a fuel capacity of 6.6 gallons



ESSENTIAL DATA DISPLAY

VFT Data Center displays volts, frequency, run time, maintenance reminders and lifetime hours

FEATURES

- Dependable 420cc OHV 4-Stroke Cummins Onan engine
- Fuel gauge on top of 6.6-gallon gasoline tank
- Battery charging port with charger included
- 3-Year Warranty



**FOR
A WORLD
THAT'S
ALWAYS ON™**

ONAN P9500DF SPEC SHEET

SPECIFICATIONS

Part Number	A058U967
Gasoline Running Watts	7,500
Gasoline Peak Watts	9,500
Gasoline Running Amps	62.5 A @ 120 V 31 A @ 240 V
Gasoline Peak Amps	79 A @ 120 V 39 A @ 240 V
Propane Running Watts	6,750
Propane Peak Watts	8,550
Propane Running Amps	56 A @ 120 V 28 A @ 240 V
Propane Peak Amps	71.25 A @ 120 V 35.6 A @ 240 V
AC Voltage	120/240 Volts
AC Frequency	60 Hz
Total Harmonic Distortion (THD)	≤23%
Automatic Voltage Regulator (AVR)	Yes
Starting System	Electric, Remote, Recoil
Battery	Included
Battery Charger Included	Yes
Remote Start Fob Included	Yes (factory paired)
Remote Start Distance (yards/meters)	109 yd (100 m)
Push Button Start	Yes
Engine Displacement	420 cc
Engine Brand	Cummins Onan
Engine Type	OHV 4 Stroke
Engine Speed	Constant
Operational Volume (dBA)	As low as 74 dBA
Carburetor Kit Required to Operate at Altitude	Yes, above 2,000 ft
Auto Idle Control	No
Built-in Inverter	No
Engine Lubrication	Splash
Recommended Oil	SAE 10W30
Oil Bottle Size (included)	1.1 qt / 1.1 L
Oil Capacity (Quarts/Ounces)	1.1 qt / 1.1 L
Low Oil Shutdown	Automatic
Fuel Type	Propane or Unleaded Gasoline, 10% Ethanol or less
Fuel Shut Off	Manual
Fuel Tank Capacity (Gallons/Liters)	6.6 gal (25 L)
Gas - Run Time at %25 Load (hrs)	16 hrs
Gas - Run Time at %50 Load (hrs)	11 hrs

Propane - Run Time at 25% Load (hrs) With 20-lb Standard Propane Tank	8 hrs
Gasoline Fuel Gauge	Yes
Choke Type	Automatic
Choke Location	Above Air Filter
AC Outlets	(1) 120/240 V 30 A (L14-30R) (2) Duplex 120 V 20 A GFCI (5-20R)
DC Outlets	(2) 5V USB
Ground	Neutral Bonded
Covered Outlets	Yes
Manual Transfer Switch Ready	Yes
GFCI Outlets	Yes
VFT Data Center (volts, frequency, run time, maintenance reminders, lifetime hours)	Yes
RV-Ready Outlet	No
Overload Protection (circuit breaker)	Yes
Handle Style	Single Handle with Foam Grip
Wheel Kit Included	Yes
Wheel Size	10 in Diameter, 2.5 in Wide
Frame Thickness in (mm)	1.25 in (25 mm)
Emissions	EPA, CARB
Canada CSA Compliant	Yes
Spark Arrestor	Yes
Residential Warranty	3 Years
Commercial Warranty	1 Year
Assembled Length in (mm)	27.25 in (692 mm)
Assembled Width in (mm)	26.25 in (667 mm)
Assembled Height in (mm)	26.25 in (667 mm)
Extended Length in (mm)	40.7 in (1,033.9 mm)
Carton Length in (mm)	31 in (787 mm)
Carton Width in (mm)	21.75 in (552 mm)
Carton Height in (mm)	23.25 in (591 mm)
Dry Unit Weight lb (kg)	194 lb (88 kg)
Shipping Weight lb (kg)	202 lb (91.6 kg)



Cummins Inc.
Box 3005
Columbus, IN 47202-3005
U.S.A.

cummins.com

Bulletin 5300165 Produced in U.S.A. Rev. 3/22
 ©2022 Cummins Inc.