
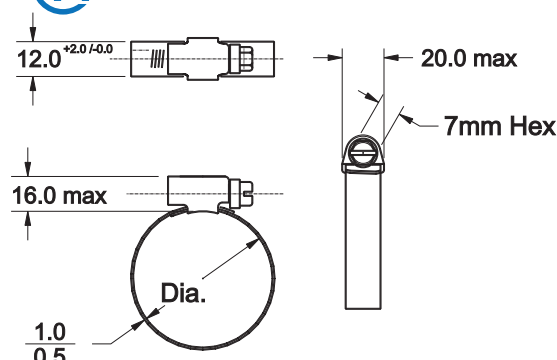


Embossed Non-Perforated Worm Gear Clamps

- Meets the DIN 3017 standard
- Available in all 304 stainless steel (W4) and 316 stainless steel (W5). Ask your sales representative for W1 and W2 material grades.
- Available in 9mm and 12mm band widths.
- General purpose non perforated band especially suited for most hoses and soft silicone hoses
- Band edges rolled to protect soft hoses from shearing and fraying
- Common applications include: vehicular, industrial, mechanical engineering, plumbing and marine

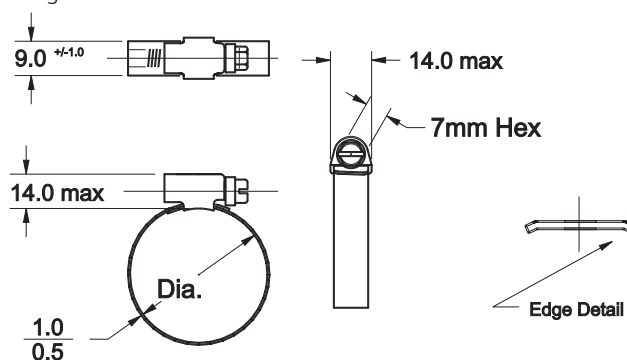

9mm Wide Embossed Band Clamps

W4 Mat'l Part Number	W5 Mat'l Part Number	Range of Adjust (mm)	Range of Adjust (in)
EB9x012SS	EBL9x012SS	8-12	0.31"-0.47"
EB9x016SS	EBL9x016SS	10-16	0.39"-0.63"
EB9x018SS	EBL9x018SS	12-18	0.47"-0.71"
EB9x022SS	EBL9x022SS	12-22	0.47"-0.87"
EB9x027SS	EBL9x027SS	16-27	0.63"-1.06"
EB9x032SS	EBL9x032SS	20-32	0.79"-1.26"
EB9x040SS	EBL9x040SS	25-40	0.98"-1.57"
EB9x045SS	EBL9x045SS	30-45	1.18"-1.77"
EB9x050SS	EBL9x050SS	35-50	1.38"-1.97"
EB9x060SS	EBL9x060SS	40-60	1.57"-2.36"
EB9x070SS	EBL9x070SS	50-70	1.97"-2.76"
EB9x080SS	EBL9x080SS	60-80	2.36"-3.15"
EB9x090SS	EBL9x090SS	70-90	2.76"-3.54"
EB9x100SS	EBL9x100SS	80-100	3.15"-3.94"
EB9x110SS	EBL9x110SS	90-110	3.54"-4.33"
EB9x120SS	EBL9x120SS	100-120	3.94"-4.72"
EB9x130SS	EBL9x130SS	110-130	4.33"-5.12"
EB9x140SS	EBL9x140SS	120-140	4.72"-5.51"
EB9x150SS	EBL9x150SS	130-150	5.12"-5.91"
EB9x160SS	EBL9x160SS	140-160	5.51"-6.30"

12mm Wide Embossed Band Clamps

W4 Mat'l Part Number	W5 Mat'l Part Number	Range of Adjust (mm)	Range of Adjust (in)
EB12x022SS	EBL12x022SS	12-22	0.47"-0.87"
EB12x027SS	EBL12x027SS	16-27	0.63"-1.06"
EB12x032SS	EBL12x032SS	20-32	0.79"-1.26"
EB12x040SS	EBL12x040SS	25-40	0.98"-1.57"
EB12x045SS	EBL12x045SS	30-45	1.18"-1.77"
EB12x050SS	EBL12x050SS	35-50	1.38"-1.97"
EB12x060SS	EBL12x060SS	40-60	1.57"-2.36"
EB12x070SS	EBL12x070SS	50-70	1.97"-2.76"
EB12x080SS	EBL12x080SS	60-80	2.36"-3.15"
EB12x090SS	EBL12x090SS	70-90	2.76"-3.54"
EB12x100SS	EBL12x100SS	80-100	3.15"-3.94"
EB12x110SS	EBL12x110SS	90-110	3.54"-4.33"
EB12x120SS	EBL12x120SS	100-120	3.94"-4.72"
EB12x130SS	EBL12x130SS	110-130	4.33"-5.12"
EB12x140SS	EBL12x140SS	120-140	4.72"-5.51"
EB12x150SS	EBL12x150SS	130-150	5.12"-5.91"
EB12x160SS	EBL12x160SS	140-160	5.51"-6.30"

Installation Torque	(in lbs)
9mm Sizes 12-18	25.0
9mm Sizes 22-160	40.0
12mm All Sizes	60.0

**Installation
Torque**