



Heavy-Duty Worm Drive Hose Clamp

- All 316 series stainless steel clamp
- 1/2" wide band is thicker than standard worm drive clamps yielding a minimum Ultimate Torque rating of 87 in.lbs.min. (9.8Nm)
- Construction yields superior performance and longevity in corrosive environments
- Applications include plumbing, water well, municipal storm drain systems, irrigation, marine and automotive.

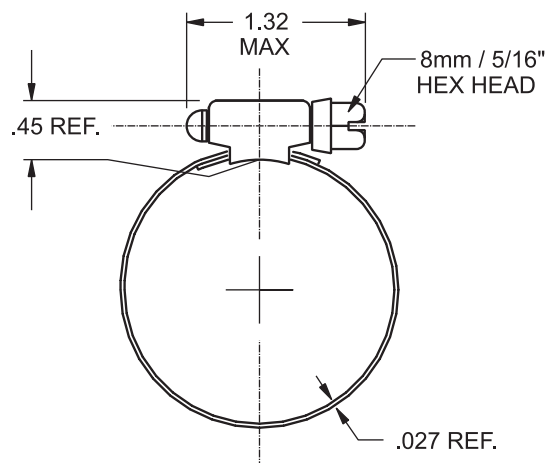

"A" Diameter Range							
SAE Size	Part Number	Decimals		Inches		Millimeters	
6	HDL 6SS	.44	.78	7/16	25/32	11	20
8	HDL 8SS	.44	.91	7/16	29/32	11	23
10	HDL 10SS	.56	1.06	9/16	1/1/16	14	27
12	HDL 12SS	.69	1.25	11/16	1-1/4	18	32
16	HDL 16SS	.75	1.50	3/4	1-1/2	19	38
20	HDL 20SS	.81	1.75	13/16	1-3/4	21	44
24	HDL 24SS	1.06	2.00	1-1/16	2	27	51
28	HDL 28SS	1.31	2.25	1-5/16	2-1/4	33	57
32	HDL 32SS	1.56	2.50	1-9/16	2-1/2	40	64
36	HDL 36SS	1.81	2.75	1-13/16	2-3/4	46	70
40	HDL 40SS	2.06	3.00	2-1/16	3	52	76
44	HDL 44SS	2.31	3.25	2-5/16	3-1/4	59	83
48	HDL 48SS	2.56	3.50	2-9/16	3-1/2	65	89
52	HDL 52SS	2.81	3.75	2-13/16	3-3/4	71	95
56	HDL 56SS	3.06	4.00	3-1/16	4	78	102
60	HDL 60SS	3.31	4.25	3-5/16	4-1/4	84	108
64	HDL 64SS	3.56	4.50	3-9/16	4-1/2	90	114
72	HDL 72SS	4.06	5.00	4-1/16	5	103	127
80	HDL 80SS	4.56	5.50	4-9/16	5-1/2	116	140
88	HDL 88SS	5.06	6.00	5-1/16	6	129	152
96	HDL 96SS	5.56	6.50	5-9/16	6-1/2	141	165
104	HDL 104SS	6.06	7.00	6-1/16	7	154	178
116	HDL 116SS	6.50	7.75	6-1/2	7-3/4	165	197

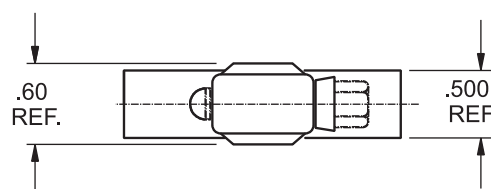

Email Your Purchase Order to orderentry@murraycorp.com