




FairPatch & FairStrips Material Data Sheet

FMT-PDT-EXT-0003

FAIRMAT

Description

FairPatch and FairStrips are cured, single-ply composite elements with fully customizable sizes and shapes, providing a perfect solution for products with specific needs, while being designed for straightforward manual or robotic assembly.

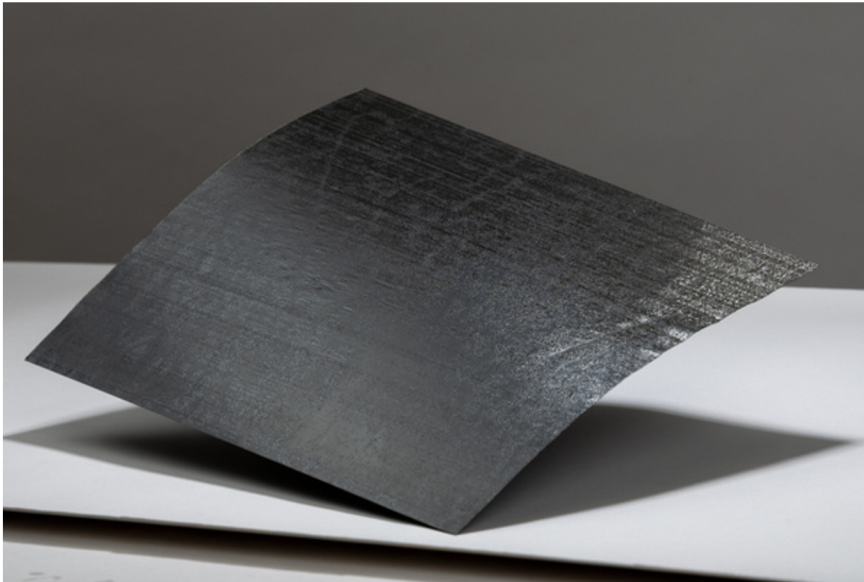

It has several key benefits:

Application-Specific

By allowing you to tailor fiber direction within hard-mold shapes, our material provides localized stiffening with highly aligned fibers that stay in place during molding, maximizing impact durability.

High performance

Built upon the same core technology as our standard chips, these materials guarantee the same material strength & recyclability, delivering trusted high performance for specialized applications.

Certified consistency

Each product's consistency is certified thanks to our embedded traceability & specification control, and is delivered with full documentation.

Integration Flexibility

Designed for manual or robotic integration into molds or components, this material can be used on its own, with other Fairmat materials, or between plies of virgin materials for complete manufacturing flexibility.

Resign agnostic

Fully compatible with your existing processes, our material can be laminated with any thermoset or thermoplastic resin.

Simple Logistics

Easy to handle. Store at room temperature. No special equipment is needed.

Key Features

Engineered with continuous fibers for well-defined load paths, FairPatch and FairStrips are designed for manual or robotic assembly into tools or laminated stacks.



User-Friendly

Easy to integrate



Ecological

Crafted from 100% recycled CFRP



Flexible and moldable



Simplified logistics

Can be stored at room temperature



Easy to cut and customize



High performance

Continuous and long fibers

Product characteristics

Recycled CFRP FairPatch & FairStrips Characteristics

Woven Material

CARBON FIBER WEAVE	Woven Plain	Woven Twill			Woven Satin		
LENGTH (MM)	100 -1000						
WIDTH (MM)	20 - 600						
CONDENSED THICKNESS ¹ (MM)	0.210	0.235	0.305	0.260	0.310	0.360	
FIBER AREAL WEIGHT (GSM)	195	215	265	245	295	335	
TOTAL AREAL WEIGHT ² (GSM)	320	355	440	410	490	560	

For bigger FairPatch & FairStrips dimensions, please contact our sales support.

¹ Condensed Thickness is defined as the effective thickness calculated using the density, mass, and dimensions. This is not a physical thickness.

² Total Areal Weight = Carbon Fiber Weight + Cured Resin Weight



UDMaterial

FIBER ORIENTATION	Unidirectional 200	Unidirectional 300	Unidirectional 400
LENGTH (MM)	100 - 1000		
WIDTH (MM)	20 - 300		
CONDENSED THICKNESS ¹ (MM)	0.12	0.19	0.25
FIBER AREAL WEIGHT (GSM)	125	185	245
TOTAL AREAL WEIGHT ² (GSM)	210	305	405

For bigger FairPatch & FairStrips dimensions, please contact our sales support.

¹ Condensed Thickness is defined as the effective thickness calculated using the density, mass, and dimensions. This is not a physical thickness.

² Total Areal Weight = Carbon Fiber Weight + Cured Resin Weight

Options

1. Support Film Characteristics

The support film is bonded to the FairPatch/FairStrips via a hot melt adhesive web. It enhances resin flow for stronger, more consistent parts, stabilizes the material during handling and cutting, and protects edges against delamination — preserving structural integrity throughout processing.

TYPE	Glass Fiber Non-woven (GFNW)	Glass Fiber Woven (GFW)
TOTAL AREAL WEIGHT ² (GSM)	40	35
MEASURED THICKNESS (MM)	0.15	0.05
CONDENSED THICKNESS ¹ (MM)	0.10	0.05

¹ Condensed Thickness is defined as the effective thickness calculated using the density, mass, and dimensions. This is not a physical thickness.

² Total Areal Weight = Support film Weight + Hot melt adhesive web Weight

2. Custom cutting

Custom cutting of FairPatch and FairStrips into ready-to-use kits offers several key advantages:

- it streamlines the lamination phase by eliminating the need for manual cutting, thus significantly increasing manufacturing efficiency.
- it optimizes the part's mechanical performance through high-precision cuts that meet exact engineering specifications.
- it improves material draping on molds with complex geometry, enabling to reduce defects and material waste.


For specific cutting requirements, please reach out to your Fairmat representative.

3. Punching

Punching (or perforating) of FairPatch and FairStrips improves adhesion by optimizing resin flow during the curing process, without degrading the material's mechanical properties.

The micro-perforations act as escape channels, allowing trapped air and excess resin to be removed under heat and pressure. This leads to better layer compaction and more intimate contact, resulting in a stronger, more uniform bond with fewer defects.

For specific punching requirements, please reach out to your Fairmat representative.

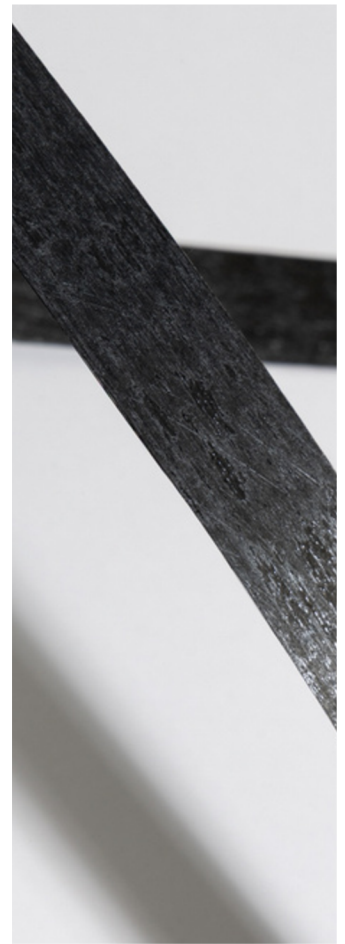

Recommendations for processing

- FairPatch & FairStrips are dry products that need to be used with resin,
- They are compatible with all kinds of epoxy resins and polyurethane resins,
- They can be mixed with other virgin materials: dry glass fiber, dry carbon fiber, prepregs, foam, honeycomb,
- Different impregnation methods can be used:
 - Resin films
 - Liquid resin application
 - Impregnation with resin rich prepregs or standard prepeg, depending on the FairPatch & FairStrips characteristics
- A minimum of 100 gsm of resin is suitable for a good impregnation of FairPatch & FairStrips
- Molding temperature is recommended to be between 20°C and 200°C
- FairPatch & FairStrips products can be cut at shape before molding
- Recommended cutting method is using an oscillation cutting machine with following parameters:
 - Line speed: 20mm/s
 - Curves speed: 10mm/s
 - Carbon material blade

Mechanical properties

[0/0/0/0/0] Woven laminates

Made with Woven materials, 1.4g/cc, 65% FairPatch/FairStrips by vol

TYPE	SP	HP
0° TENSILE MODULUS (GPA)	36	40
0° TENSILE ULTIMATE STRENGTH (MPA)	420	609
STANDARDS	ISO 527	

Other grades are available, please contact us for more information.

[0/0/0/0/0] UD laminates

Made with UD materials, 1.4g/cc, 65% FairPatch/FairStrips by vol

	SP	HP
0° TENSILE MODULUS (GPA)	83	109
0° TENSILE ULTIMATE STRENGTH (MPA)	1463	2061
STANDARDS	ISO 527	

Other grades are available, please contact us for more information.

STORAGE & HANDLING

Fairmat products should be stored in dry conditions (with air humidity below 70%) and at ambient temperatures between 0°C and 40°C, avoiding any direct exposure to sunlight.

When handling these materials, follow the standard safety precautions applicable to cured carbon fiber-reinforced composites and fibrous materials.

HEALTH & SAFETY

Fairmat certifies that our products are compliant with the European Union Regulation (EC) 1907/2006 governing the Registration, Evaluation, Authorization and Restriction of Chemicals (REACH) and do not contain substances above 0.1% weight of a Substance of Very High Concern (SVHC) listed in Annex XIV. Advised precautions for safe handling are general PPE (gloves, safety goggles, mask and protective clothing).



All data given is based on representative samples of the materials in question. Since the method and circumstances under which these materials are tested are key to their performance, and Fairmat has no assurance of how its customers will use the material, Fairmat cannot guarantee their properties. Fairmat® is a registered trademark of Fairmat SAS.

