

STEEL STUD

S5150, S6450, S7655, S9255, S5175, S6475, S7675,
S9275, S1507, S64115, S76115, S92115, S15012

Leaders in Innovative
Building Products

PRODUCT DESCRIPTION

Studco Steel Stud engineered to provide the ideal solution to create durable and versatile framing systems that also achieve the needs and design criteria in accordance with the Building Code of Australia (BCA) and the New Zealand Building Code (NZBC) and appropriate standards. Manufactured in Australia from the highest quality cold-formed BlueScope Steel.

FEATURES


- Studco steel stud and wall framing systems have enhanced strength making them tougher, safer and more reliable for load bearing capacities.
- The Studco lipped wall studs are available in various widths, lengths and come in 0.50BMT-1.15BMT.
- Bell mouth service holes are punched at 500mm centres eliminating the need for cabling grommets.
- The knurled face along the stud flange provides a positive screw point location. Studs can be boxed or spliced to extend the overall length or to provide strengthening if required.

APPLICATION

The Studco Steel Stud range can be used for a variety of wall and ceiling applications. Speak to Studco's technical team for more information.

INSTALLATION

Refer to the Studco Wall & Ceiling Design Manual or contact Studco's technical team for custom solutions on 1300 255 255 or email techadvice@studcosystems.com.au

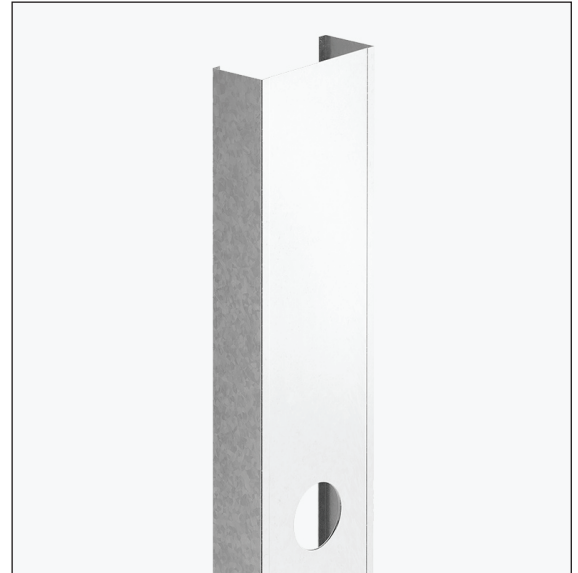

STEEL STUD



INSTALLATION EXAMPLE

Product Dashboard

STEEL STUD

S5150, S6450, S7655, S9255, S5175, S6475, S7675,
S9275, S1507, S64115, S76115, S92115, S15012

Leaders in Innovative
Building Products

PRODUCT RANGE

Ordering Information

Available in various widths, lengths and BMT thickness. Dimensions below:

Product Code	Width (mm)	Depth (mm)	Available Lengths (mm)	Thickness BMT (mm)	Sub Pack	Stock Pack	Approx kg/m
S5150	51	36	2400 / 2700 / 2750* / 3000 / 3300* / 3600	0.50	10	100	0.54
S6450	64	36	2400 / 2700 / 2750* / 2800* / 3000 / 3300 / 3600 / 4200 / 4800	0.50	10	100	0.60
S7655	76	36	2400 / 2700 / 2750* / 3000 / 3300* / 3600 / 4200 / 4800 / 6000	0.55	10	100	0.71
S9255	92	36	2400 / 2700 / 2750* / 3000 / 3300 / 3600 / 4200 / 4800 / 6000	0.55	10	100	0.79
S5175	51	36	2700 / 3000 / 3600	0.75	10	100	0.78
S6475	64	36	2400 / 2700 / 3000 / 3600 / 4200 / 4800 / 6000	0.75	10	100	0.89
S7675	76	36	2400 / 2700 / 3000 / 3600 / 4200 / 4800 / 6000	0.75	10	100	0.97
S9275	92	36	2400 / 2700 / 3000 / 3600 / 4200 / 4800 / 6000	0.75	10	100	1.06
S1507	150	36	3600 / 4200 / 4800 / 6000 / 7200	0.75	10	60	1.38
S64115	64	36	2700 / 3000 / 3600 / 4200 / 4800 / 6000	1.15	1	100	1.26
S76115	76	36	2700 / 3000 / 3600 / 4200 / 4800 / 6000	1.15	1	100	1.37
S92115	92	36	2700 / 3000 / 3600 / 4200 / 4800 / 6000 / 7200	1.15	1	100	1.52
S15012	150	36	3600 / 4200 / 4800 / 6000 / 7200	1.15	10	60	2.06

* Lead times may apply.

WARRANTY

This product is covered by Studco's Warranty. Conditions and limitations of warranties are set out in Studco Project Warranty certificate.

FURTHER ASSISTANCE

Contact the Technical Team at Studco for assistance with specifications, product selection, acoustic engineering, and structural engineering enquiries. Call on 1300 255 255 or contact us at sales@studcosystems.com.au.

ACCREDITATION

