
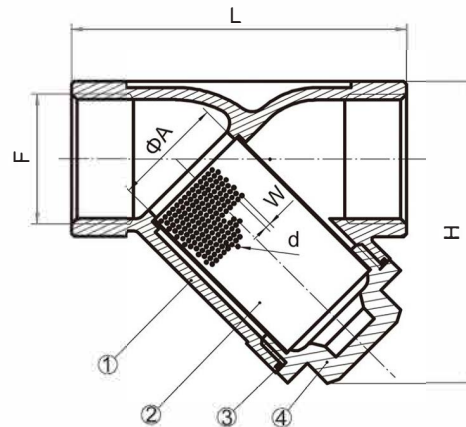


Y-STRAINER (UVQF502)

FEATURES

- ◆ 800PSI(PN40)
- ◆ Investment Casting
- ◆ PED97/23/PE (CE0036) Approved
- ◆ Casting Approved AD2000-W0
- ◆ Thread: ASME B1.20.1 BS21.DIN2999/259,
ISO228-1, JIS B 0203, ISO7/1
- ◆ Inspection Testing: DIN3230/3, EN12266



SIZE	A	B	H	L	W	d
1/4"	15	26	58	65	2	1
3/8"	15	26	58	65	2	1
1/2"	15	26	58	65	2	1
3/4"	20	33	68	78.5	2	1
1"	25	41	88	89	2	1
1-1/4"	32	49	100	105	2	1
1-1/2"	40	56	108	120	2	1
2"	50	69	130	140	2	1

ITEM	DESIGNATION	QTY	MATERIAL
1	BODY	1	CF8/CF8M
2	GASKET	1	304/316
3	SCREEN	1	304/316
4	CAP	1	CF8/CF8M