

MOBILE HARBOUR CRANE SOCKETS


MORE PRODUCT INFO


CLOSED VERSION

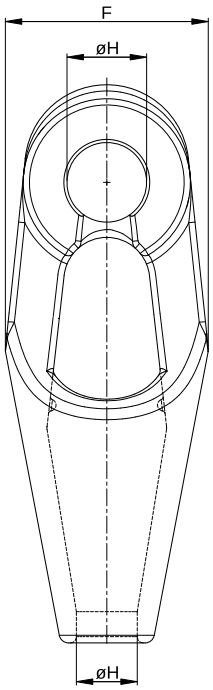

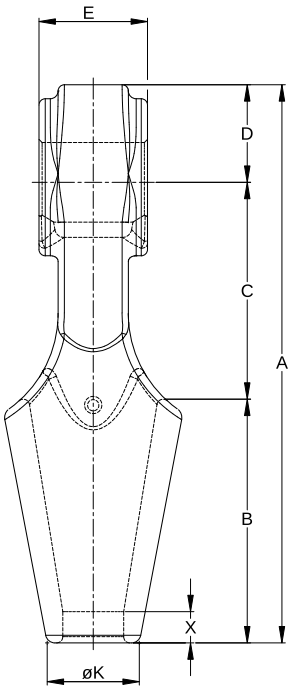

OPEN VERSION WITH BOLT (ROLLER OPTIONAL)

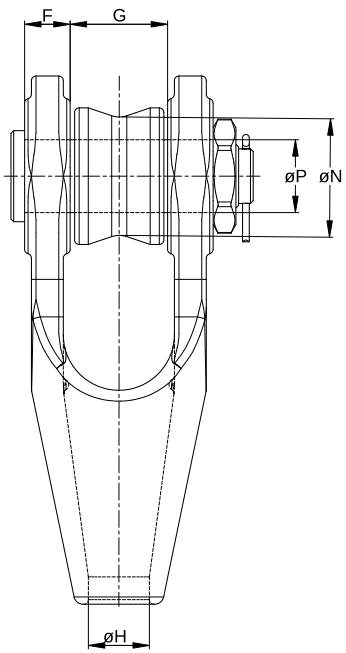

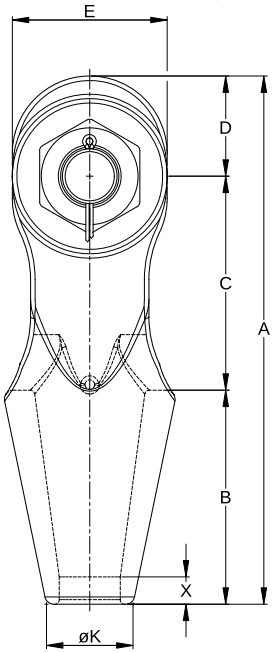

MODEL NUMBER	COMPATIBLE WITH MODEL NUMBER	MBL (MTONS)	WIRE ROPE Ø (MM)	APPROX. RESIN VOLUME (CC)	DIMENSIONS (MM)												WEIGHT (KG)
					A	B	C	D	E	F	G	ØH	ØK	ØN	ØP	X	
CLOSED VERSION																	
MHCS 6-CLOSED	Gottwald 6	125	31 - 34	500	368	155	137	63	67	148	-	42	60	-	-	26	12.5
MHCS 7-CLOSED	Gottwald 7	160	35 - 38	750	415	175	170	70	77	168	-	47	65	-	-	29	19
MHCS 8-CLOSED	Gottwald 8	200	39 - 43	1000	468	198	190	80	87	200	-	52	75	-	-	33	25
MHCS 9-CLOSED	Gottwald 9	280	44 - 54	1500	580	235	235	110	98	215	-	67	95	-	-	30	48
MHCS 10-CLOSED	Gottwald 10	400	55 - 60	2500	630	265	284	120	120	238	-	72	110	-	-	35	65
MHCS 11-CLOSED	Gottwald 11	450	61 - 65	4000	715	312	278	125	139	260	-	78	118	-	-	40	85
OPEN VERSION																	
MHCS 6-OPEN	Gottwald 6	125	31 - 34	500	365	155	150	60	110	37	70	42	60	80	55	20	16.8
MHCS 7-OPEN	Gottwald 7	160	35 - 38	750	415	175	170	75	130	41	80	47	65	95	60	23	25
MHCS 8-OPEN	Gottwald 8	200	39 - 43	1000	476	198	190	88	136	46	90	52	75	100	70	25	34.1
MHCS 9-OPEN	Gottwald 9	280	46 - 54	1500	580	235	235	110	170	50	106	67	95	130	80	30	58.9
MHCS 10-OPEN	Gottwald 10	400	55 - 60	2500	630	265	245	120	190	54	126	72	110	O.R.	90	35	72
MHCS 11-OPEN	Gottwald 11	450	61 - 65	4000	705	312	285	125	200	56	144	78	118	O.R.	100	40	93

METRIC

MBL = Minimum Breaking Load | **Mtons =** Metric tonnes | Assembly weights may vary depending on the selected configuration

FINISH Hot-dip galvanised with zinc-nickel plated components I Primer RAL 170 60 45

GLOBAL ROPE FITTINGS
AQUALLINE PRODUCTS