

MOBILE HARBOUR CRANE SOCKETS


MORE PRODUCT INFO


CLOSED VERSION

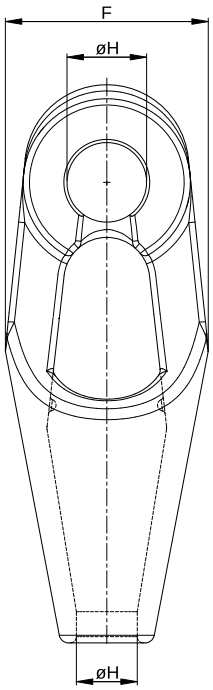

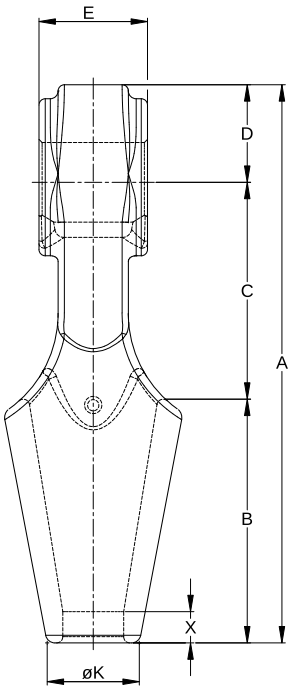

OPEN VERSION WITH BOLT (ROLLER OPTIONAL)

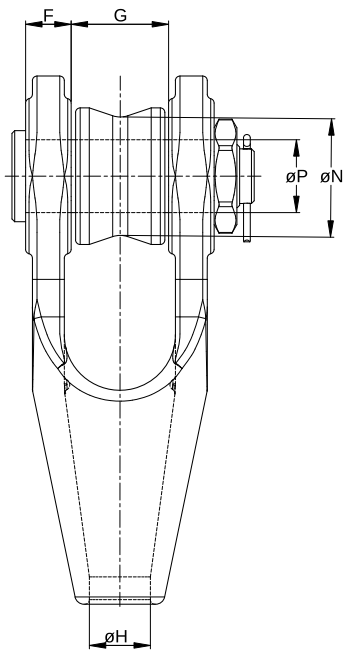

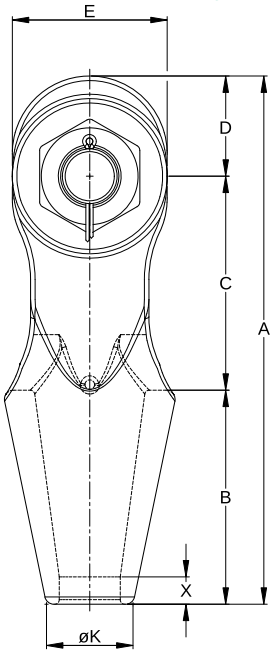

IMPERIAL

MODEL NUMBER	COMPATIBLE WITH MODEL NUMBER	MBL (MTONS)	WIRE ROPE Ø (INCH)	APPROX. RESIN VOLUME (CC)	DIMENSIONS (INCH)												WEIGHT (LBS)
					A	B	C	D	E	F	G	ØH	ØK	ØN	ØP	X	
CLOSED VERSION																	
MHCS 6-CLOSED	Gottwald 6	125	$1^{1}/_{4}$-$1^{5}/_{16}$	500	14.49	6.10	5.39	2.48	2.64	5.83	-	1.65	2.36	-	-	1.02	27.6
MHCS 7-CLOSED	Gottwald 7	160	$1^{3}/_{8}$-$1^{1}/_{2}$	750	16.34	6.89	6.69	2.76	3.03	6.61	-	1.85	2.56	-	-	1.14	41.9
MHCS 8-CLOSED	Gottwald 8	200	$1^{9}/_{16}$-$1^{11}/_{16}$	1000	18.43	7.80	7.48	3.15	3.43	7.87	-	2.05	2.95	-	-	1.30	55.1
MHCS 9-CLOSED	Gottwald 9	280	$1^{3}/_{4}$-$2^{1}/_{8}$	1500	22.83	9.25	9.25	4.33	3.86	8.46	-	2.64	3.74	-	-	1.18	105.8
MHCS 10-CLOSED	Gottwald 10	400	$2^{3}/_{16}$-$2^{3}/_{8}$	2500	24.80	10.43	11.18	4.72	4.72	9.37	-	2.83	4.33	-	-	1.38	143.3
MHCS 11-CLOSED	Gottwald 11	450	$2^{3}/_{8}$-$2^{9}/_{16}$	4000	28.15	12.28	10.94	4.92	5.47	10.24	-	3.07	4.65	-	-	1.57	187.4
OPEN VERSION																	
MHCS 6-OPEN	Gottwald 6	125	$1^{1}/_{4}$-$1^{5}/_{16}$	500	14.37	6.10	5.91	2.36	4.33	1.46	2.76	1.65	2.36	3.15	2.17	0.79	37
MHCS 7-OPEN	Gottwald 7	160	$1^{3}/_{8}$-$1^{1}/_{2}$	750	16.34	6.89	6.69	2.95	5.12	1.61	3.15	1.85	2.56	3.74	2.36	0.91	55.1
MHCS 8-OPEN	Gottwald 8	200	$1^{9}/_{16}$-$1^{11}/_{16}$	1000	18.74	7.80	7.48	3.46	5.35	1.81	3.54	2.05	2.95	3.94	2.76	0.98	75.2
MHCS 9-OPEN	Gottwald 9	280	$1^{3}/_{4}$-$2^{1}/_{8}$	1500	22.83	9.25	9.25	4.33	6.69	1.97	4.17	2.64	3.74	5.12	3.15	1.18	129.9
MHCS 10-OPEN	Gottwald 10	400	$2^{3}/_{16}$-$2^{3}/_{8}$	2500	24.80	10.43	9.65	4.72	7.48	2.13	4.96	2.83	4.33	O.R.	3.54	1.38	158.7
MHCS 11-OPEN	Gottwald 11	450	$2^{3}/_{8}$-$2^{9}/_{16}$	4000	27.76	12.28	11.22	4.92	7.87	2.20	5.67	3.07	4.65	O.R.	3.94	1.57	205

MBL = Minimum Breaking Load | **Mtons =** Metric tonnes | Assembly weights may vary depending on the selected configuration

FINISH Hot-dip galvanised with zinc-nickel plated components I Primer RAL 170 60 45

GLOBAL ROPE FITTINGS
AQUALLINE PRODUCTS