

OPEN WEDGE SOCKETS WITH INTEGRATED TAIL CLAMP


MORE PRODUCT INFO


WITH PIN

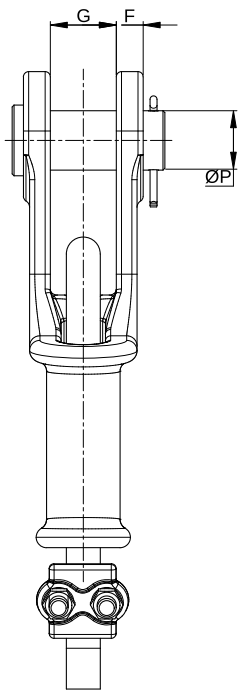

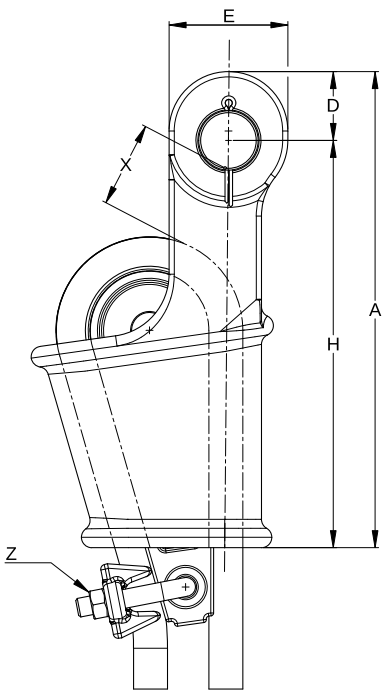

WITH BOLT

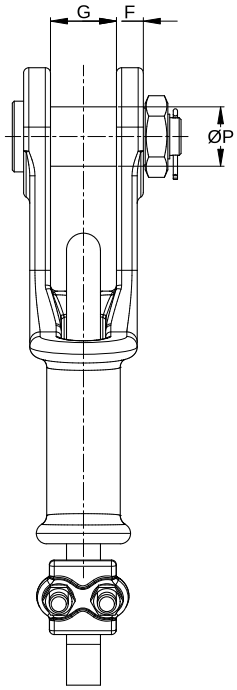

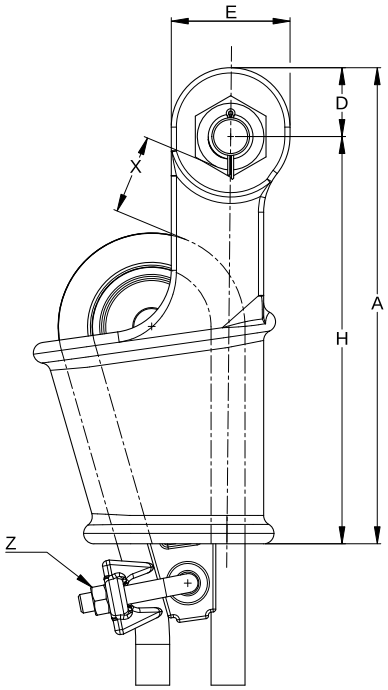

METRIC

MODEL NUMBER	MBL (MTONS)	WIRE ROPE Ø (MM)	DIMENSIONS (MM)								WIRE ROPE CLIP SIZE	WEIGHT (KG)
			A	D	E	F	G	H	ØP	X	Z	
OWS ITC 0.15	5	5 - 6	101	17	30	8	17	84	16	35	WRC 5	0.6
OWS ITC 0.25	8	7 - 8	130	20	34	9	18	110	17.5	40	WRC 8	1
OWS ITC 0.5	12	9 - 10	150	23	40	11	20.5	125	20.6	45	WRC 10	1.7
OWS ITC 1	20	11 - 13	183	27	48	12.7	25.6	156	25.4	60	WRC 13	2.8
OWS ITC 2	25	14 - 16	224	32	56	14.5	32	192	30	65	WRC 16	4.4
OWS ITC 3	40	17 - 19	272	40	68	16.5	38	232	35	70	WRC 19	7.2
OWS ITC 4	55	20 - 22	312	48	80	20.5	45	264	41	80	WRC 22	11
OWS ITC 5	80	23 - 26	370	58	100	22.5	51	312	51	90	WRC 26	16.2
OWS ITC 6	100	27 - 29	413	65	110	25	57	348	57	100	WRC 29	23.1
OWS ITC 7	120	30 - 32	455	72	124	28	63	384	63	110	WRC 32	33.1
OWS ITC 8	130	34 - 36	508	76	132	28	70	432	63	125	WRC 35	40.4

MBL = Minimum Breaking Load | **Mtons =** Metric tonnes | **X =** Depending on the actual wire rope diameter, rope construction and fill factor
Assembly weights may vary depending on the selected configuration

FINISH Hot-dip galvanised with zinc-nickel plated components | Primer RAL 170 60 45 (for OWS ITC 4 - OWS ITC 8)

GLOBAL ROPE FITTINGS
AQUALLINE PRODUCTS