

OPEN WEDGE SOCKETS WITH INTEGRATED TAIL CLAMP


MORE PRODUCT INFO


WITH PIN

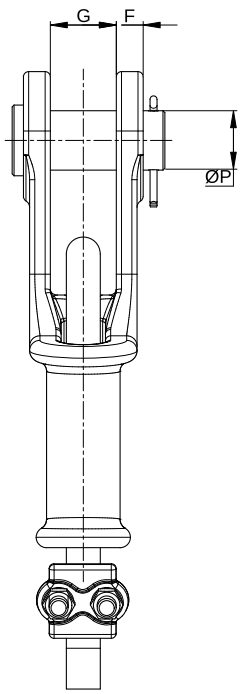

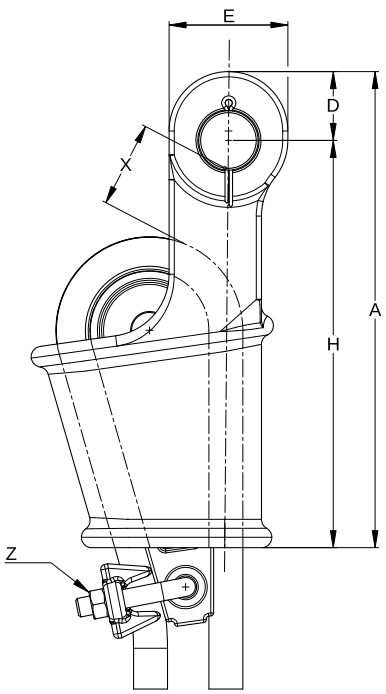

WITH BOLT

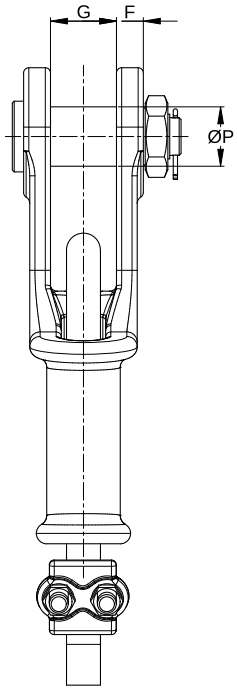

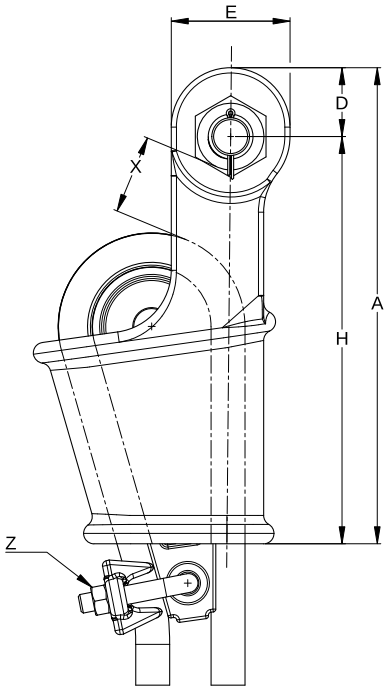

IMPERIAL

MODEL NUMBER	MBL (MTONS)	WIRE ROPE Ø (INCH)	DIMENSIONS (INCH)								WIRE ROPE CLIP SIZE	WEIGHT (LBS)
			A	D	E	F	G	H	ØP	X	Z	
OWS ITC 0.15	5	3/16 - 1/4	3.98	0.67	1.18	0.31	0.67	3.31	0.63	1.38	WRC 5	1.3
OWS ITC 0.25	8	5/16	5.12	0.79	1.34	0.35	0.71	4.33	0.69	1.57	WRC 8	2.2
OWS ITC 0.5	12	3/8	5.91	0.91	1.57	0.43	0.81	4.92	0.81	1.77	WRC 10	3.7
OWS ITC 1	20	7/16 - 1/2	7.20	1.06	1.89	0.50	1.01	6.14	1.00	2.36	WRC 13	6.2
OWS ITC 2	25	9/16 - 5/8	8.82	1.26	2.20	0.57	1.26	7.56	1.18	2.56	WRC 16	9.7
OWS ITC 3	40	3/4	10.71	1.57	2.68	0.65	1.50	9.13	1.38	2.76	WRC 19	15.9
OWS ITC 4	55	7/8	12.28	1.89	3.15	0.81	1.77	10.39	1.61	3.15	WRC 22	24.3
OWS ITC 5	80	1	14.57	2.28	3.94	0.89	2.01	12.28	2.01	3.54	WRC 26	35.7
OWS ITC 6	100	1 1/8	16.26	2.56	4.33	0.98	2.24	13.70	2.24	3.94	WRC 29	50.9
OWS ITC 7	120	1 1/4	17.91	2.83	4.88	1.10	2.48	15.12	2.48	4.33	WRC 32	73
OWS ITC 8	130	1 3/8	20.00	2.99	5.20	1.10	2.76	17.01	2.48	4.92	WRC 35	89.1

MBL = Minimum Breaking Load | **Mtons =** Metric tonnes | **X =** Depending on the actual wire rope diameter, rope construction and fill factor
Assembly weights may vary depending on the selected configuration

FINISH Hot-dip galvanised with zinc-nickel plated components | Primer RAL 170 60 45 (for OWS ITC 4 - OWS ITC 8)

GLOBAL ROPE FITTINGS
AQUALLINE PRODUCTS