
#### SCOPE OF WORK

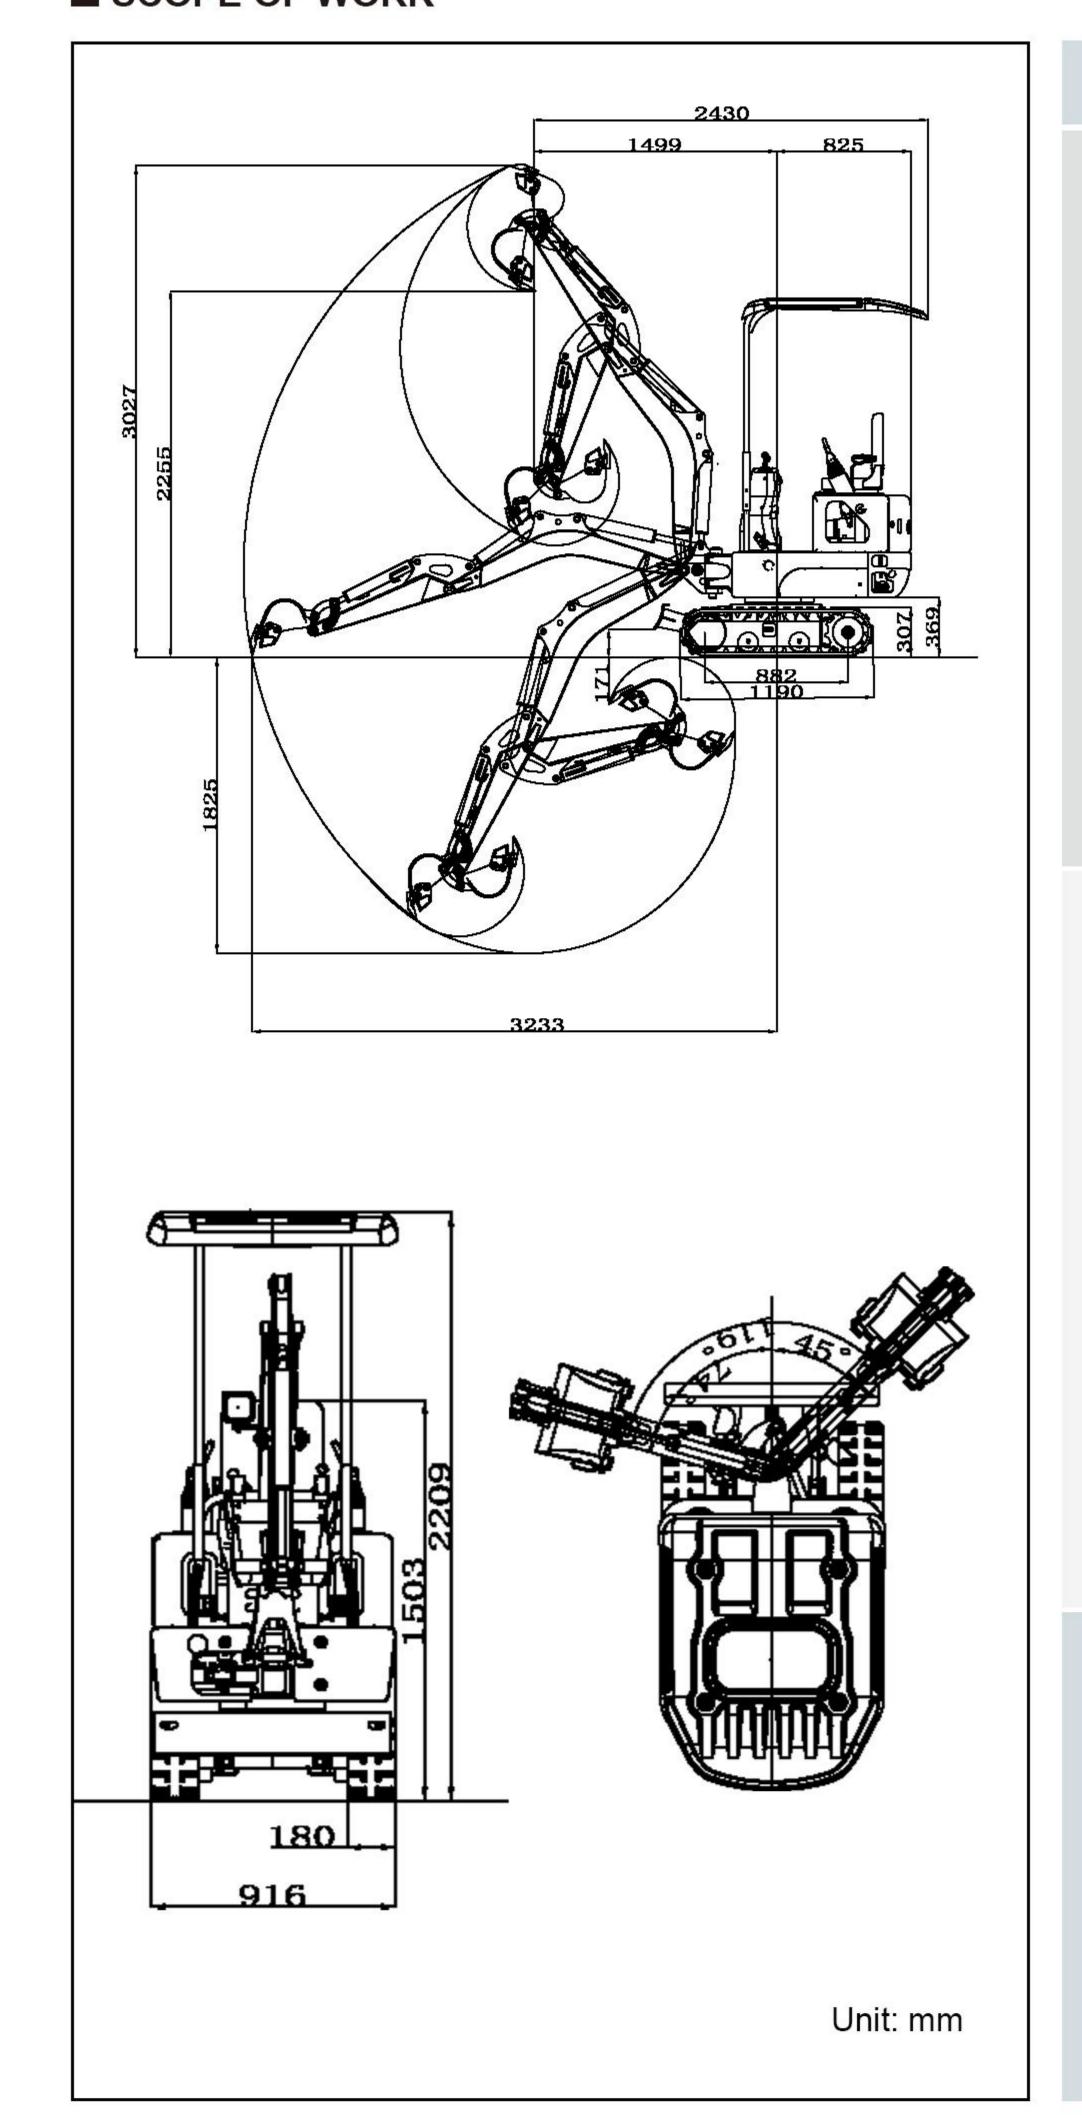

#### SPECIFICATION

	Model	US	R10 ECO
Basic parameters	Machine working weight	2244lb	1018kg
	Bucket capacity	0.49ft³	0.014m³
	Travel speed low/high speed	0-0.93mph	0-1.5km/h
	Gradeability	30%	30%
	Ground pressure	3.7psi	25.53Kpa
	Maximum digging force	9.2kN	9.2kN
	Maximum digging radius	127.3in	3233mm
	Maximum digging depth	72.2in	1833mm
	Maximum digging height	118.9in	3021mm
	Maximum unloading height	88.5in	2247mm
	Maximum deflection angle	121°	121°
	Track extension range	35.4-47.2in	900-1200mm
Engine	Engine brand	Kubota	Kubota
	Engine model	Z482	Z482
	Maximum horsepower	11hp	11.2ps
	Maximum power	8.2kw	8.2kw
	Maximum speed	3000rpm	3000rpm
	Displacement	0.13gal	0.479L
	Number of cylinders	2	2
	Cooling method	Water-cooled	Water-cooled
	Engine oil change amount	0.4gal	1.5L
	Fuel form	Diesel	Diesel
	Fuel grade	0/-10	0/-10
	Theoretical fuel consumption	0.8-1.2L/h	0.8-1.2L/h
Body	Transport length	95.7in	2430mm
	Transport width	35.9in	912mm
	Transport height	86.7in	2201mm
	Counterweight ground clearance	14.2in	361mm
	Bucket width	11.8in	300mm
	Boom length	58.1in	1477mm
	Arm length	31.5in	800mm
	D. II.I I.I	05 0 47 7:-	

#### ■ HYDRAULIC SYSTEM

Main pump type/model	Gear Pumps 306
Main pump brand	Tianjin Walking/Shengjie
Main pump maximum flow (L/min)	18L/min
Multi-way valve	2+2+5 way multi-way valve
Multi-way valve brand	Tengfei
Rated set pressure (Mpa)	17MPa

Maximum set pressure (Mpa)	18MPa
Travel hydraulic motor type	WDM-300
Travel motor brand	Paiyi
Motor displacement	315ml/r
Slewing hydraulic motor type	BM2-315
Displacement	315ml/r

35.9-47.7in


912-1212mm

Bulldozer blade width

- Please read the instruction manual carefully and use the machine correctly.
- Always wear a seat belt when working. (ROPS specifications only)
- If you are operating construction machinery with a machine mass of less than 3 tons, you must take the "Special Training for Vehicle-Mounted Construction Machinery Operation" course beforehand. If the machine mass is 3 tons or more, you must take the "Vehicle-Mounted Construction Machinery Operation Skills Course".
- To prevent breakdowns and accidents, be sure to inspect the machinery regularly.
- Specific voluntary inspections are required to be carried out by an inspection company registered with the Minister of Health, Labor and Welfare or the Director-General of the Labor Standards Inspection Bureau.




# Ultra compact dimensions superb operator protection minimal tail swing everything you need to get the job done

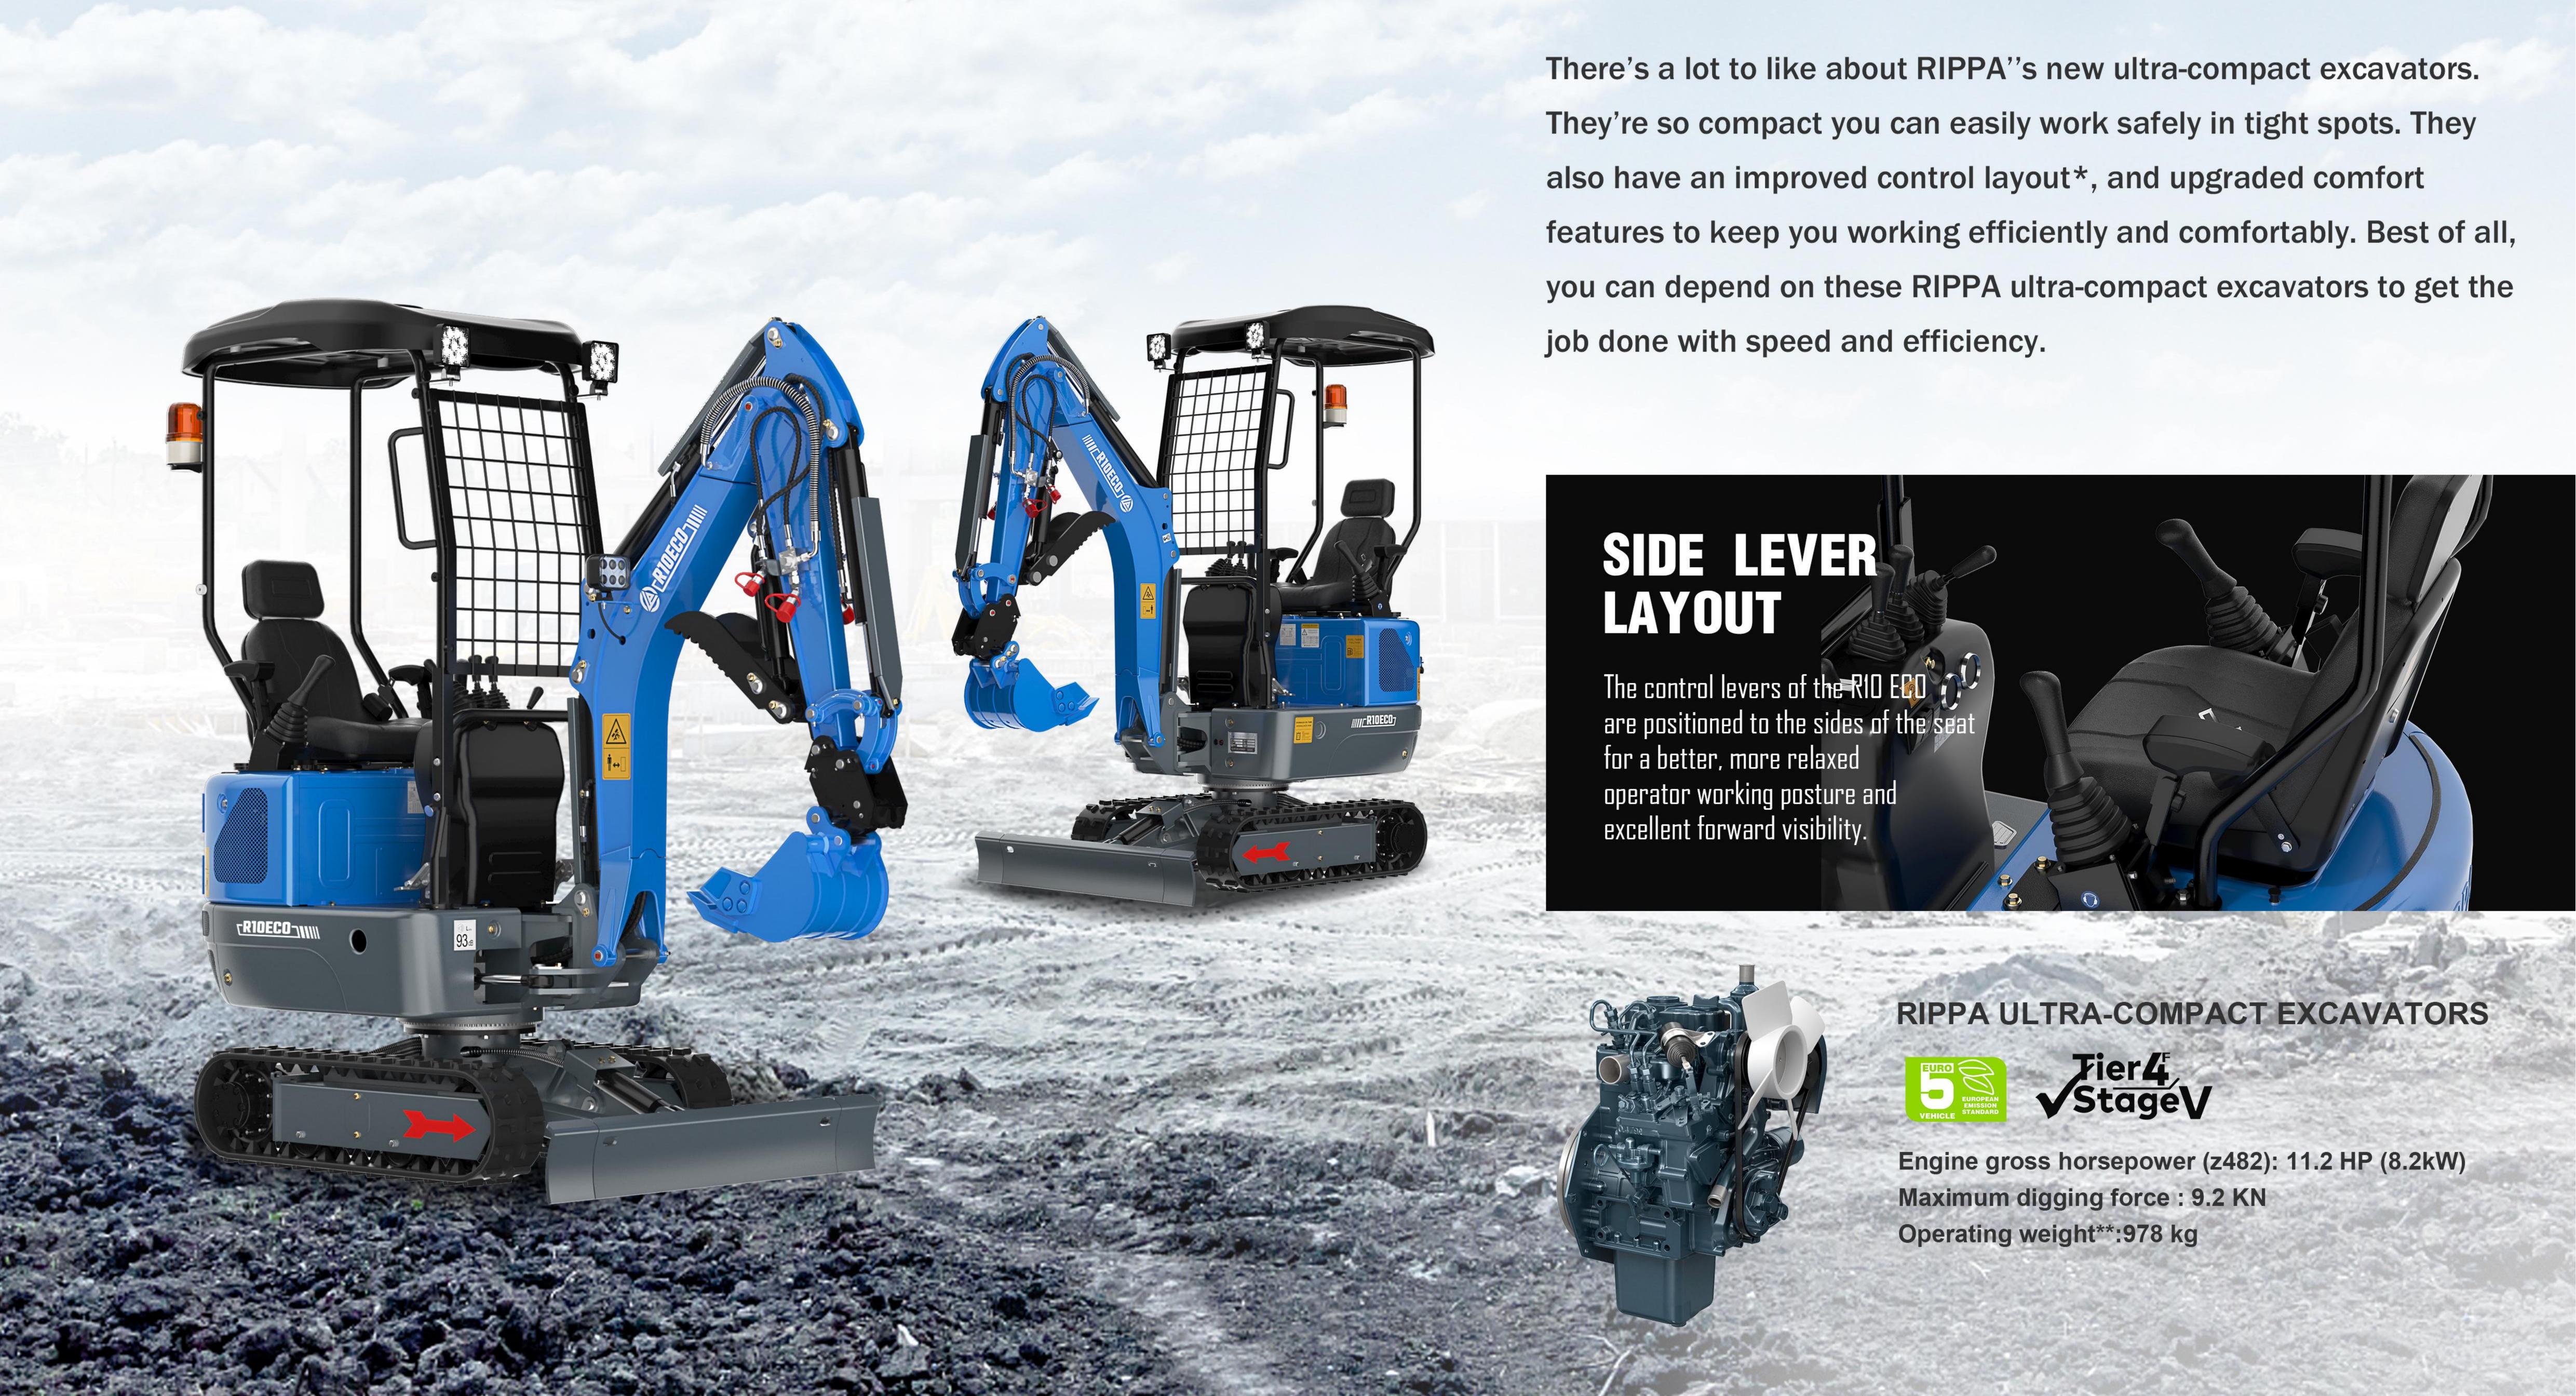

# PERFORMANCE / SAFETY

From an adjustable track gauge and two-speed travel pedal to Engine Safety Start and a new boom-mounted LED work light, this ultra-compact excavator is designed for maximum performance and safety.

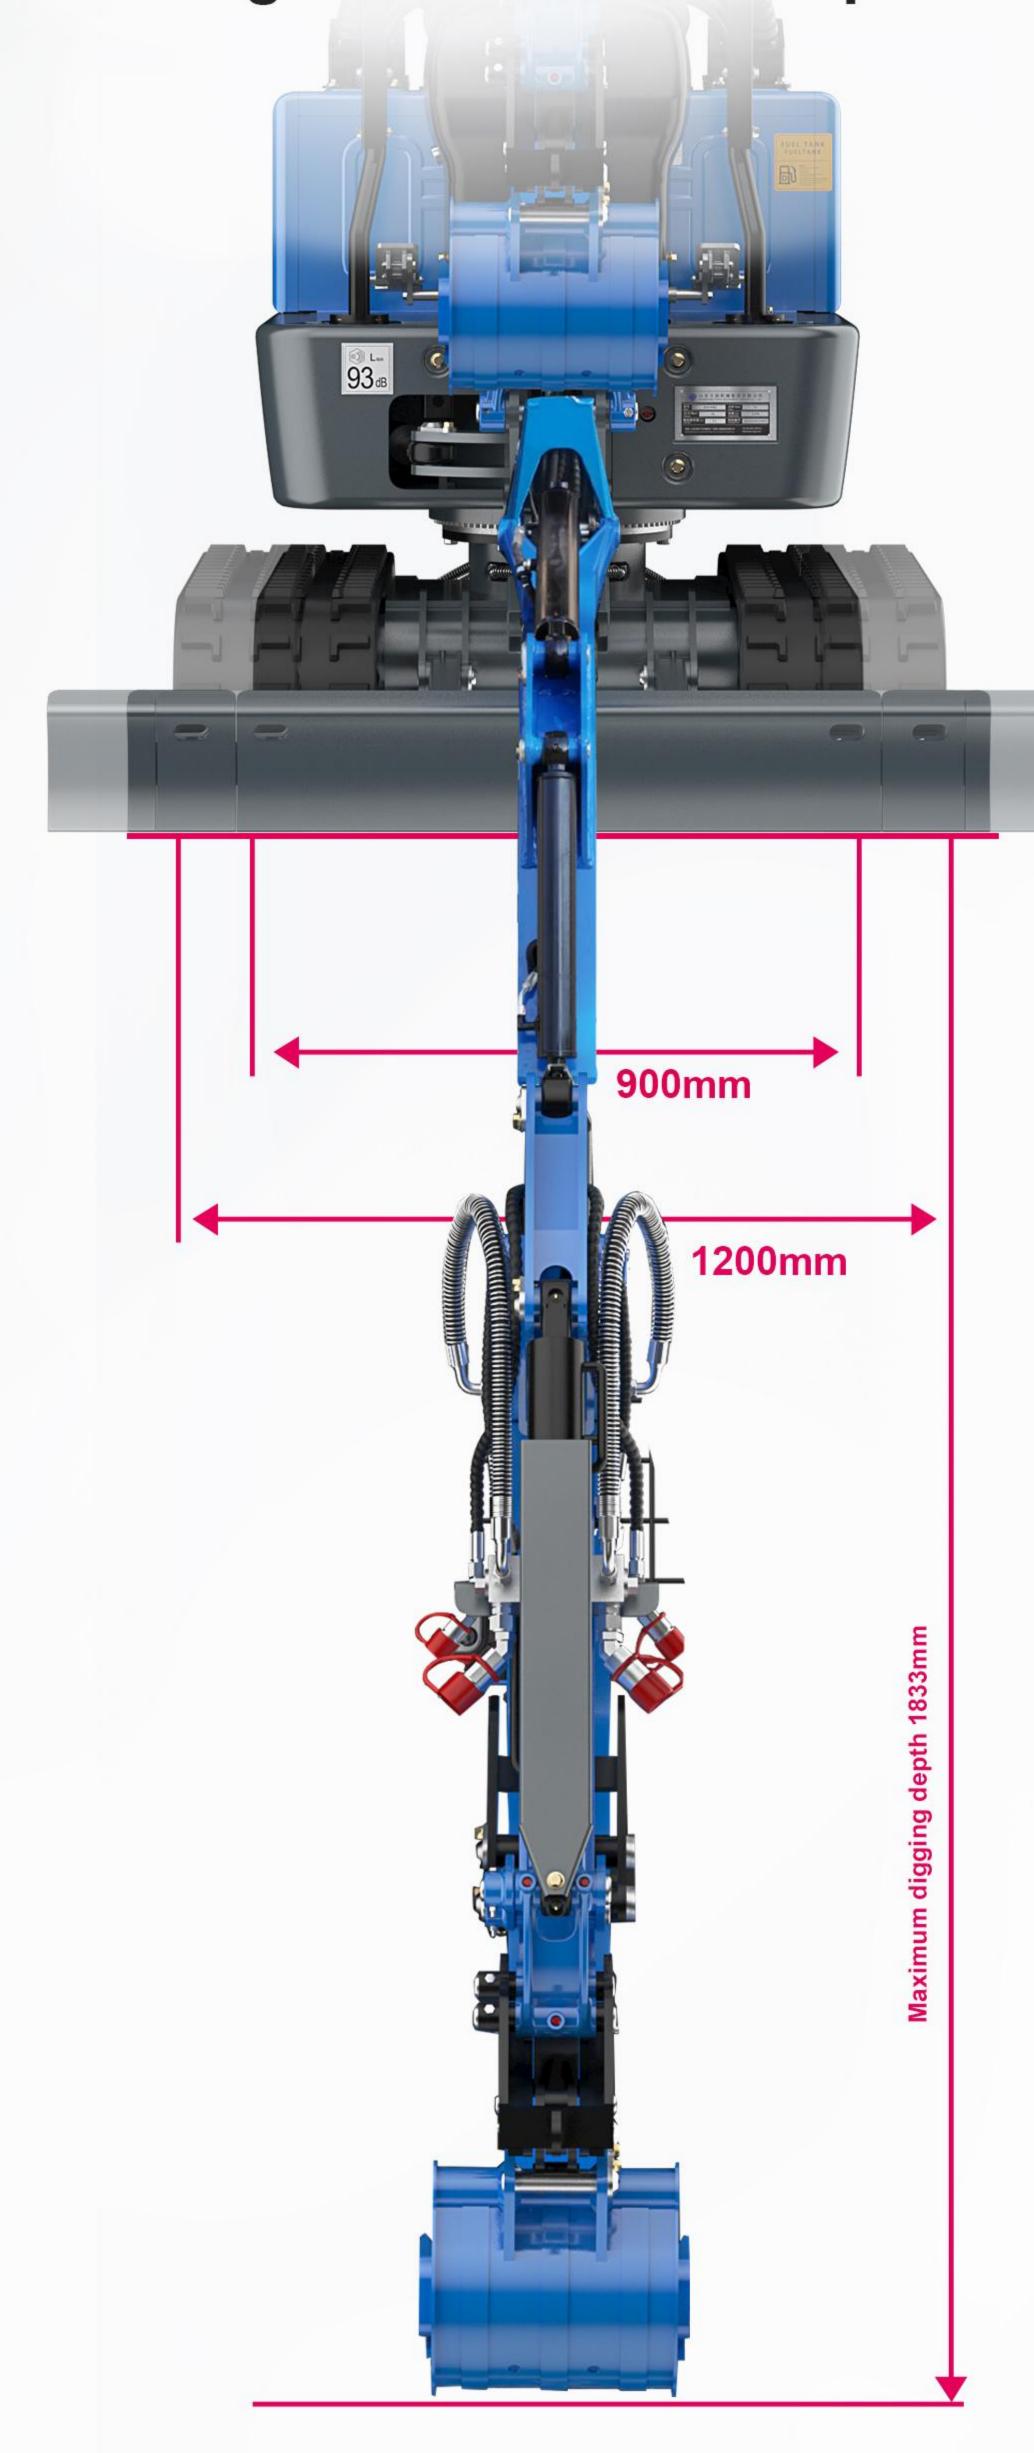

# Adiustable Track Gauge

The R10 eco hydraulically adjustable track gauge can be narrowed down to 900mm in seconds with a simple single lever operation to allow navigation in tight spaces. Conversely, you can widen the track gauge all the way up to 1200mm. Its quick-fold blade adjusts to size instantly with the simple pull of a pin. When adjusted down, these ultra-compact excavators can easily fit through most doorways, allowing access inside buildings.



# 2 Digging Range

The subcompact excavator excels at digging, with a surprisingly wide working and digging range for such a small excavator.



# 3 Large-capacity bucket

Large-capacity bucket can load more materials. The bucket is strong and durable, which greatly improves the working efficiency




He foot pedal is set to facilitate the side swing and extension of the excavator, freeing the driver's hands and improving work efficiency.



# 4 Lifting hole

More convenient movement and more fixing points for the transport of the machine.

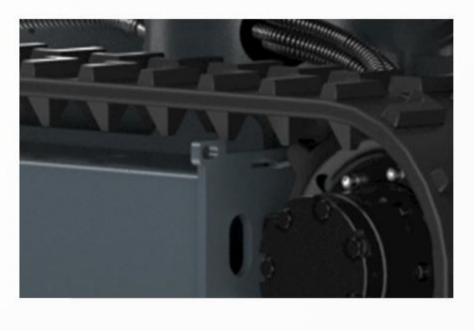

# 6 Roof upgrade

Enhance safety protection and avoid injuries from falling objects; provide clear vision at night or in low light conditions to ensure construction efficiency; expand the driver's field of view, reduce blind spots, and improve operational safety.




# 7 Cylinder guard plate

Effectively prevent the impact and scratches of stones, soil, construction debris, etc. on the cylinder, extending the life of the cylinder

# 8 Four-way crushing pipeline

Four-way high-pressure crushing oil pipe can realize more auxiliary equipment operations

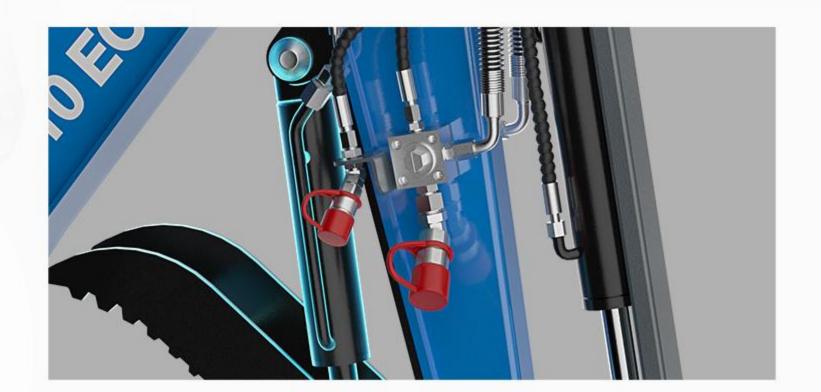

## Plastic roof cover

The plastic canopy cover is more beautiful and three-dimensional; Compared with iron roofs, it has better waterproof performance and strong corrosion resistance.





SERVICE



#### **1** ACTION BUTTON

The operation buttons are centralized and concise which is convenient for the driver to operate. They are equipped with safety lock and lighting functions which meet the basic operation needs of the operator and effectively improve work efficiency



#### 4 CENTRALIZED CONTROL

Integrating the travel and operating levers into one control system allows the operator to control the excavator's travel and working devices at the same time, reducing the need to frequently switch operating handles, making operation easier and more efficient.

#### POWER SWITCH

When the excavator is not in use or idle, the operator can cut off the power supply to the equipment through the power switch to avoid energy waste, help the equipment save energy and reduce operating costs




#### **63** COMFORTABLE SEATS

Adjustable seat, ergonomically designed to support the operator's back, waist and neck, reducing fatigue caused by long-term operation



#### **6** DASHBOARD

The function area is centralized and the dashboard is set up to facilitate the operator to control the basic status o the vehicle in real time.

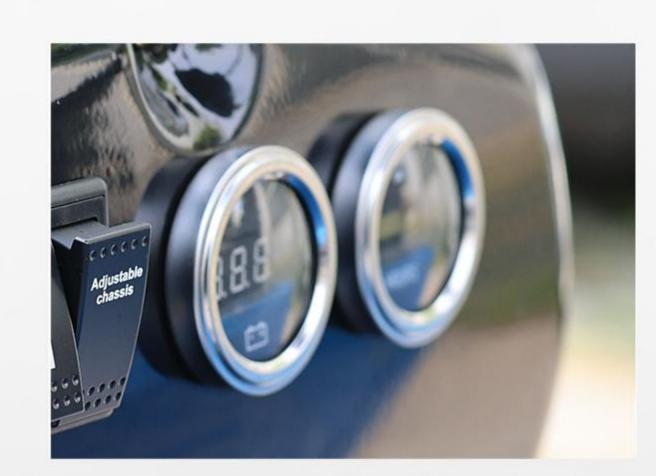

**ENGINE COVER** 

The rear-opening operator seat on the hood can be flipped up to reveal a arge portion of the engine, allowing easier access to components



#### **SAFETY WARNING LIGHT**

When the machine is working or driving, the flashing warning light can remind people on the construction site to keep a safe distance and prevent them from entering dangerous areas by mistake.



# **ENTRETIEN DES** ROULEMENTS

The rear opening hood provides easy access to the engine, and maintenance is simple

with the hydraulic service port plumbing conveniently located and protected.

The pointed butter nozzle is easier to butter, with stop protection, the excavator is not easy to damage the grease nozzle during operation, and the U-shaped stop is easier to clean up the mud.



### INTEGRAL INSULATING **COTTON APPLICATION**

The body guard is equipped with thermal insulation cotton as a whole to improve the thermal insulation effect and avoid the body temperature being too high and causing burns.

#### OIL CIRCUIT MAINTENANCE

A manually openable cover is specially set at the foot pedal, so that when checking the oil circuit and the line, it will be handy and efficient, which provides great convenience for subsequent maintenance and inspection work.



#### COUNTERWEIGHT

The excavator counterweight not only ensures the safety of the operation by balancing the torque and improving the stability, but also directly or indirectly improves the operation efficiency, protects the mechanical structure, and expands the operating capacity, which is an indispensable and important component of the excavator to achieve efficient, safe and multi-functional operations.





# WE ARE RIPPA

Shandong Rippa Machinery Group Co., Ltd. is located in the sixth industrial park of Jining High-tech Zone, Shandong Province. It is a state-owned high-tech enterprise with import and export rights.

The company's employees are energetic and enterprising, constantly creating the legend and fame of the rippa!







#### Shandong Rippa Machinery Group Co., Ltd.

Address: No. 39, Guang'an Road, Liuxing Sub-district Office, High-tech Zone, Jining City, Shandong Province.

www.rippa.com