



Datasheet



ST 2100

Satellite communications for monitoring vehicles and industrial equipment.

The ST 2100 offers reliable global satellite connectivity—ideal for remote locations. Its durable, sealed design supports installation on mobile assets like vehicles, railcars, and equipment, as well as fixed assets such as pipelines, pumps, and tanks in industrial settings.

With a simplified architecture for low-cost satellite messaging, the ST 2100 is non-programmable and does not support SKYWAVE apps or Lua scripting. However, it features an intuitive AT Command set for easy integration with external controllers and flexible installation options for side or bottom cable access.

Fleet management

Always-on satellite connectivity for tracking drivers and mobile assets in the most remote areas of the world.

Cathodic protection

Ensure safety and compliance by monitoring pipeline health in isolated locations.

SCADA

Remote monitoring and control of SCADA systems including electrical grid infrastructure and industrial assets like valves, pumps and tanks.

Two-way communication

Simple command set

Quick deployment

Compact

Rugged and environmentally sealed

Specifications

Satellite Communication

- Satellite Service: Two-way, Global, OGx or IsatData Pro
- Maximum message size:
 - ▶ OGx: From-mobile 1 MB, to-mobile 1 MB
 - ▶ IsatData Pro: From-mobile 6.4 kB, to-mobile 10 kB
- Typical latency: <15 sec, 100 bytes
- Elevation angle: +20° to +90°
- Frequencies:
 - ▶ OGx: Rx 1525.0 to 1559.0 MHz; Tx 1626.5 to 1660.5 MHz
 - ▶ IsatData Pro: Rx 1525.0 to 1559.0 MHz; Tx 1626.5 to 1660.5 MHz
- EIRP: <7.0 dBW

Environmental

- Operating temperature: -40°C to +85°C
- Dust and water ingress: IP67
- Vibration: SAE J1455 (Sec 4.9.4.2 fig 6-8); MIL-STD-810G (Sec 514.6, 514.6C-1)
- Shock: MIL-STD-810G (Sec 516.6)



Bottom cable access

GPS/GLONASS/Beidou

- Acquisition time: Hot: 1s; cold: 29s/30s/36s
- Accuracy: 2.0m CEP

Dimensions


12.5 cm x 8.5 cm x 3.6 cm

Certification

- Regulatory: CE, FCC, IC
- Other: Inmarsat Type Approval, IP67, Anatel

Electrical

- Input voltage: 9 to 32V; Load dump protection: +150V; SAE J1455 (Sec. 4.13);
- Supercapacitor: 5F, 5V
- Power consumption (typical @12VDC, 23°C):
 - ▶ IDP receive: 75 mA;
 - ▶ IDP transmit: 570 mA;
 - ▶ GPS/Glonass/Beidou: 35 mA;
 - ▶ Sleep: 280 µA

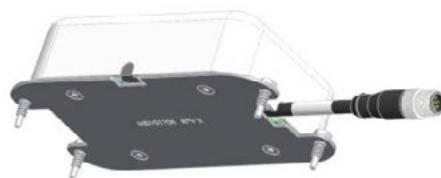

Side cable access

External interfaces

- Inputs/outputs:
 - ▶ Event notification: Indicates ST 2100 events have occurred
 - ▶ 1PPS: One pulse per second output timed by GPS
 - ▶ Reset in: Allows external device to reset the ST 2100
 - ▶ Reset out: Allows the ST 2100 to reset an external device
- Serial: 1 x RS-232 (AT command set)

Order codes

- **ST2100-P2X** ST 2100 with super capacitor
- **ST2100-PXX** ST 2100 without super capacitor
- **ST100990-001** Bottom cable access mount kit
- **ST100991-001** Side cable access mount kit
- **ST101004-001** ST 2100 Development kit
- **ST101349-001** ST 2100 Blunt cut cable, 5m
- **840-00193** Extension cable

Although we strive to ensure accuracy in all of our published specifications, actual field performance can vary depending on a variety of environmental, installation and usage factors, as well as third-party factors such as cellular providers. The specifications listed are approximations, and do not constitute binding statements or modify the terms and conditions of purchase or lease including, but not limited to, product operational limitations and warranties. All specifications are subject to change without notice. Please check www.skywave.com to ensure you have the latest version of these specifications.

Email: sales@skywave.com | Call: **1-800-672-2666**

Visit our website www.skywave.com

SKYWAVE, an ORBCOMM company, is a global provider of IoT solution enablement technology. We empower solution providers, system integrators and OEMs to serve their customers through satellite and cellular managed IoT networks and a complete application enablement platform. We provide a fully integrated ecosystem of purpose-built devices, data automation and connectivity services for high-reliability, low-data solutions. SKYWAVE is where IoT powers mission-critical applications for the transportation, agriculture, oil and gas and maritime industries.