

SY60U

SANY

supported by **Putzmeister**



TOP-OF-THE-RANGE ROOF RACK

PRECISE. PRACTICAL. POWERFUL.



MINI EXCAVATOR
SY60U

Engine
YANMAR 4TNV98C
Power
42.5 kW / 2000 rpm
Bucket capacity
0.22 m³
Operating weight
6300 kg

MINI EXCAVATOR

- + Two additional proportional hydraulic circuits on the joysticks and preparation for hydraulic quick couplers
- + New cab interior with 7" touchscreen
- + Float position function for the dozer blade
- + Reversing camera with 110° wide angle
- + 20 programmable implements
- + Air conditioning
- + Load-sensing hydraulic system



ENGINE

Model	YANMAR 4NTV98C
Type	Water-cooled, 4 cylinders, with common rail system and DPF
Emissions regulations	Stage V
Power	42.5 kW / 2 000 rpm
Maximum torque	235 Nm / 1 300 rpm
Displacement	3 300 ccm
Batteries	2 × 12V / 120 Ah

SERVICE FILLING QUANTITIES

Fuel tank	125 l
-----------	-------

POWER

Swing speed	10 rpm
Maximum travel speed	Fast 4 km/h, slow 2.3 km/h
Bucket capacity	0.22 m³
ISO bucket breakout force	40 kN
ISO arm pull-out force	30 kN

OPERATING WEIGHT


Weight	6 300 kg
--------	----------

WORK RANGE

Maximum reach	6 375 mm
Maximum digging depth	3 990 mm
Maximum cutting height	5 695 mm
Maximum dumping height	3 970 mm
Maximum digging depth, vertical wall	3 130 mm
Total height with minimum turning radius	2 730 mm
Dozer blade height	340 mm

DIMENSIONS

C Overall height	2 530 mm
A Overall length	5 830 mm
B Overall width	2 000 mm
I Rear turning radius	1 350 mm

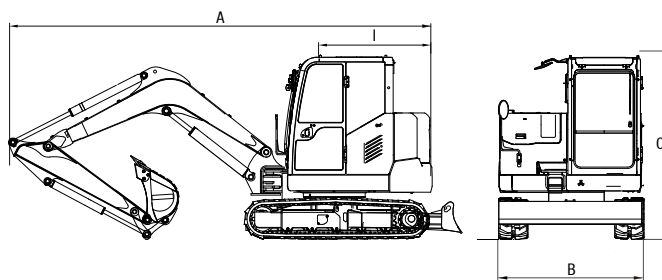

Not all products are available in all markets. As part of our ongoing improvement process, we reserve the right to change specifications and designs without prior notice. Images may contain additional options.

SANY

supported by **Putzmeister**

Putzmeister Oceania

12 Kimpton Way,
Altona VIC 3018
1300 321 080
sanyoceania@putzmeister.com
www.sanyoceania.com