



GENERAL CONRUCTION NOTES


- All Folding Tolerances are $\pm 1.2\text{mm}$ with an angle variation of $\pm 1^\circ$
- All Rolling Tolerances $\pm 8\text{mm}$
- All Fabricated and Welded Components are Manufactured to a Tolerance of $\pm 2\text{mm}$
- All Fabricated and Welded Corners are Manufactured to a Tolerance of $\pm 5\text{mm}$ across a Diagonal Measurement
- Were powder coated components are applicable they are completed to the following specification:
 - Pre Treatment – Shot Blast SA 2.5
 - Primer – Zinc Rich primer with a minimum of $60\mu\text{m}$
 - Top Coat – Final Top coat to be a minimum of $60\mu\text{m}$
- All Timber finishes are supplied as un-treated
- All Cor-ten finishes are supplied as un-treated/un-weathered

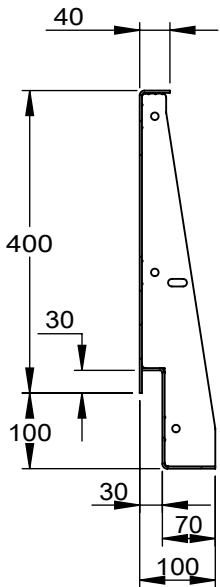


SECTION A-A

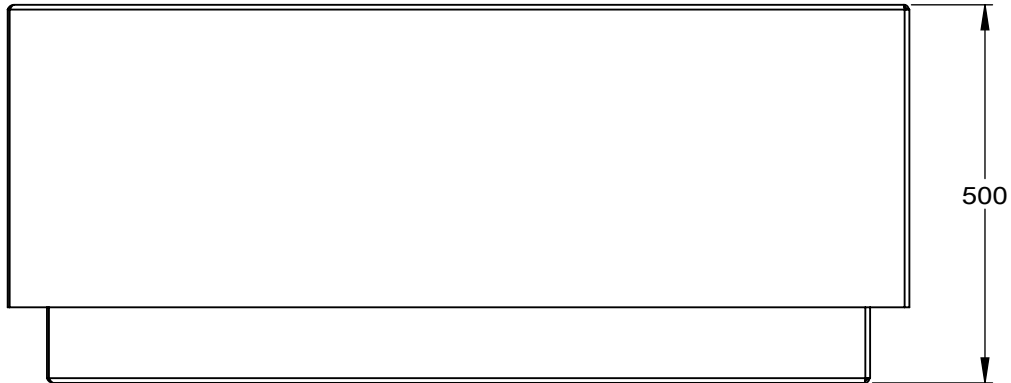

FRONT ELEVATION

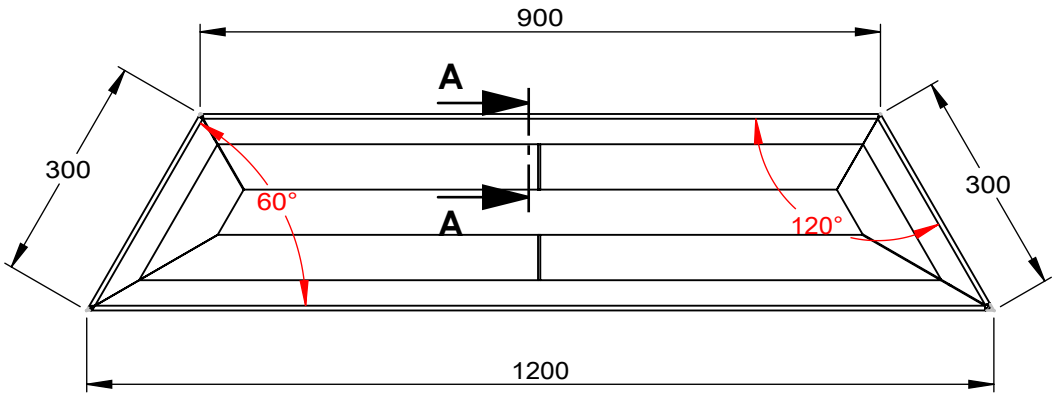

PLAN

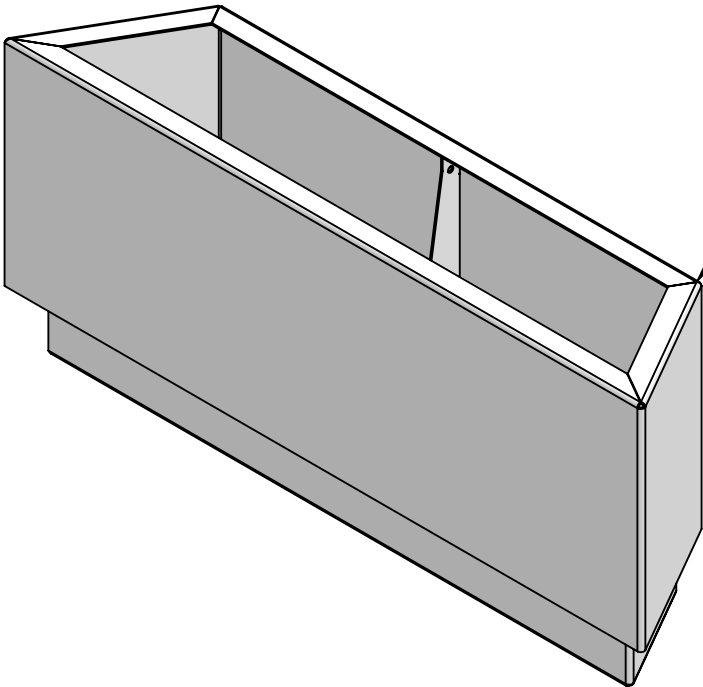

RADIUS ON ALL
CORNERS AND EDGES

3D VIEW

KAIRO LIGHT DETAIL

- **TOTAL WEIGHT = 40.40Kg**

REV. A

No.1 Old Street
Clarkenwell
London
EC1V 9HL

