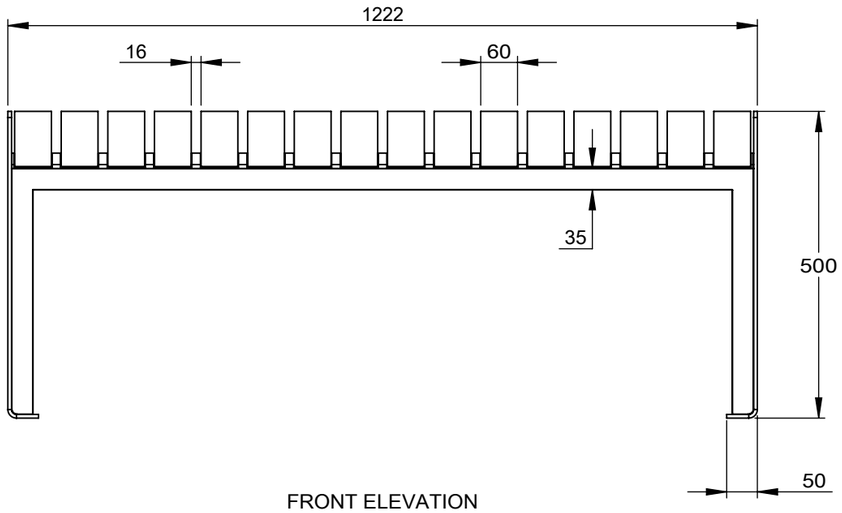

FRONT ELEVATION

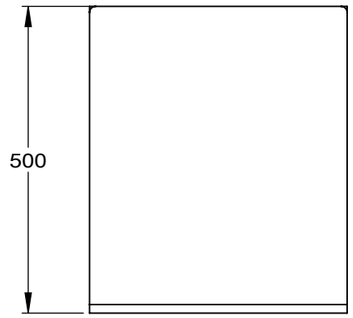

LEFT HAND ELEVATION

GENERAL CONRUCTION NOTES

- All Folding Tolerances are ± 1.2mm with an angle variation of ± 1°
- All Rolling Tolerances ± 8mm
- All Fabricated and Welded Components are Manufactured to a Tolerance of ± 2mm
- All Fabricated and Welded Corners are Manufactured to a Tolerance of ± 5mm across a Diagonal Measurement
-
- Were powder coated components are applicable they are completed to the following specification:
  - Pre Treatment – Shot Blast SA 2.5
  - Primer – Zinc Rich primer with a minimum of 60um
  - Top Coat – Final Top coat to be a minimum of 60um
- All Timber finishes are supplied as un-treated
- All Cor-ten finishes are supplied as un-treated/un-weathered

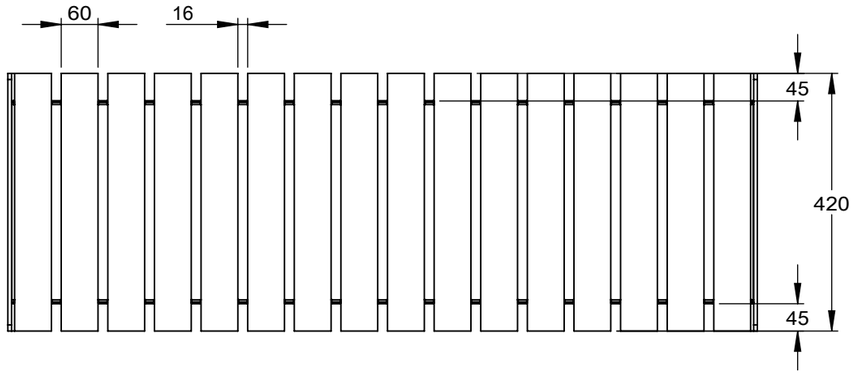

PLAN

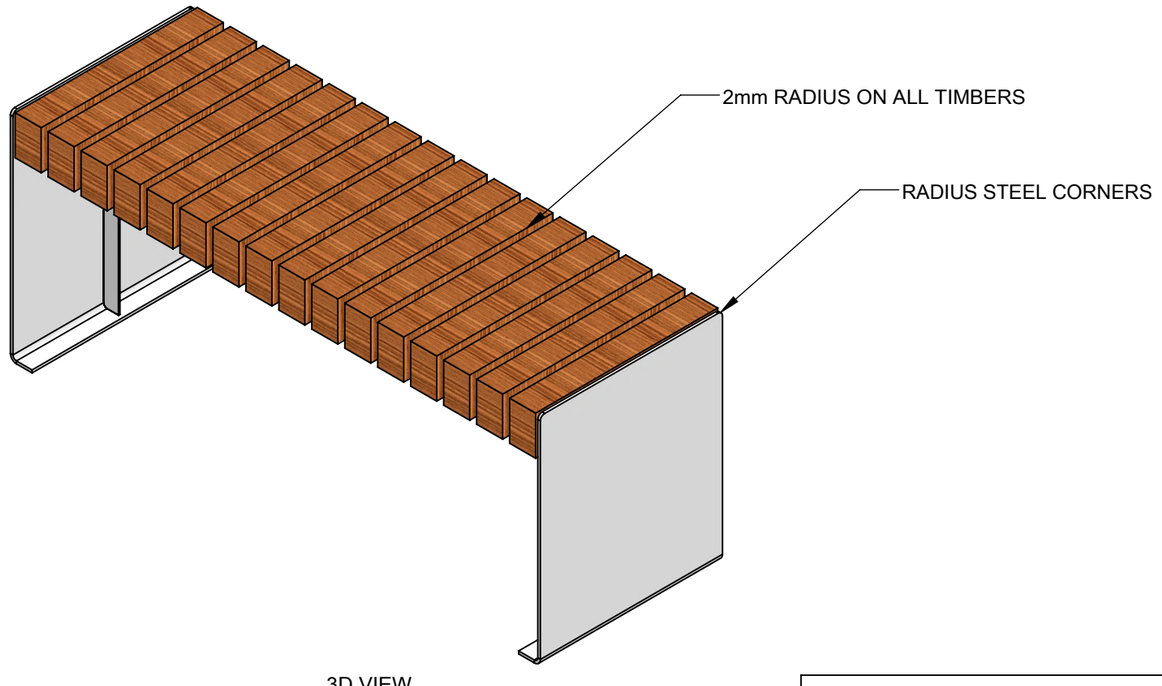

3D VIEW

KINLEY BENCH 4

- **TOTAL WEIGHT = 56.00Kg**

REV. A

No.1 Old Street
Clarkenwell
London
EC1V 9HL

Kinley