

CIRCA

Data Sheet

CIRCA

Where Sound Meets Style

The CIRCA ceiling speaker offers a sleek, compact design engineered for a modern audio solution that seamlessly blends into any environment. With its minimalistic profile and discreet installation system, this speaker is perfect for both commercial and residential settings, enhancing interiors without drawing unwanted attention.



Crystal Clear Sound, Always Heard

The CIRCA delivers high-fidelity audio with clear, balanced sound ideal for background music and public announcements.

Durability Meets Effortless Sound

Its robust construction using durable materials ensures reliable performance even in high-traffic areas, while the optimized power supply and easy maintenance features guarantee a hassle-free, long-lasting audio experience.


Technical Specifications

General Specification	Ceiling Speaker
Rated Power:	6W
Max Power:	9W
Line Input:	70-100V
Power Tapping:	100V: 6W, 3W; 70V: 3W, 1.5W
Sensitivity (1W / 1m):	90dB
MAX Sensitivity:	96dB
Frequency Response (-10dB):	100Hz~18kHz
Dispersion (4kHz / 1kHz):	55° / 160°
Power Selecting Way:	Three Core Cables: Blue: 1.7k Ω , Red: 3.3k Ω , Black: COM
Material:	Panel & Grille: Steel
Colour:	White
Temperature / Humidity:	-20°C ~ 55°C <95%
Speaker Unit:	6.5" Twin Cone Speaker
Dimensions (LxH):	Ø 200x65mm
Mounting Hole:	Ø 170 (Ceiling Thickness: 25mm)
Weight:	0.7kg

Technical Specifications

General Specification	Ceiling Speaker
Mounting:	Two Integral Spring-loaded Quick-Mounted Locking Clamps
Shipping Weight:	15kg, 20pcs
Shipping Dimensions:	0.0669CBM, 42x37x43cm, 20pcs


Dimensions

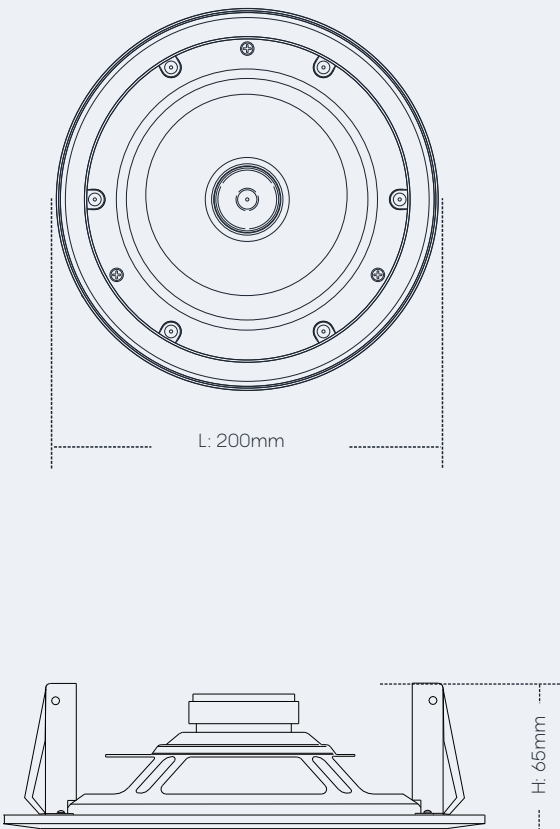


Technical Data

Ceiling Speaker

Frequency Response

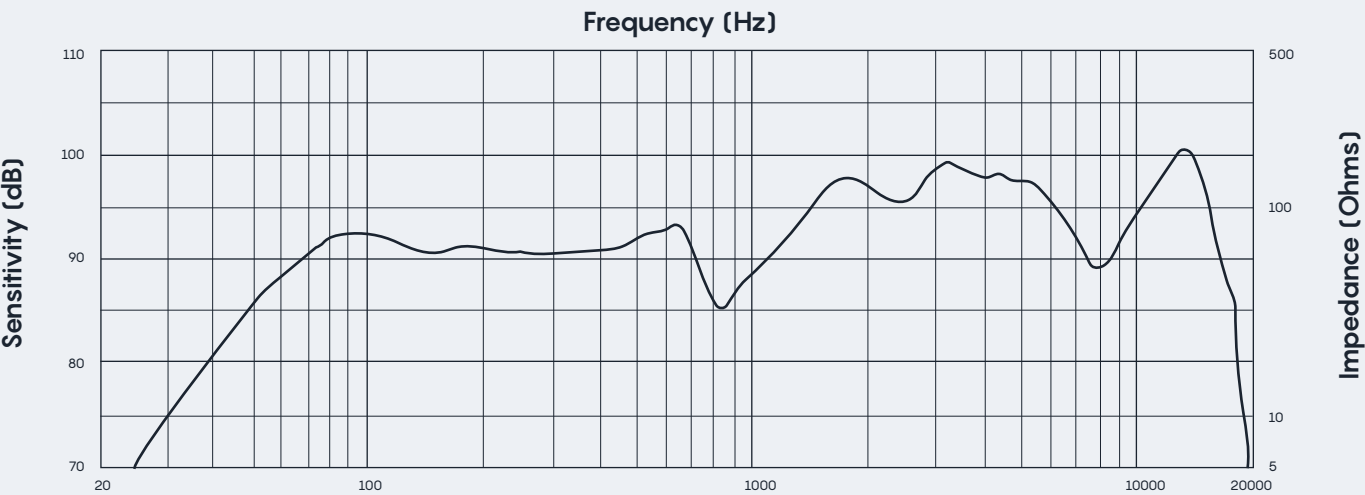

Impedance

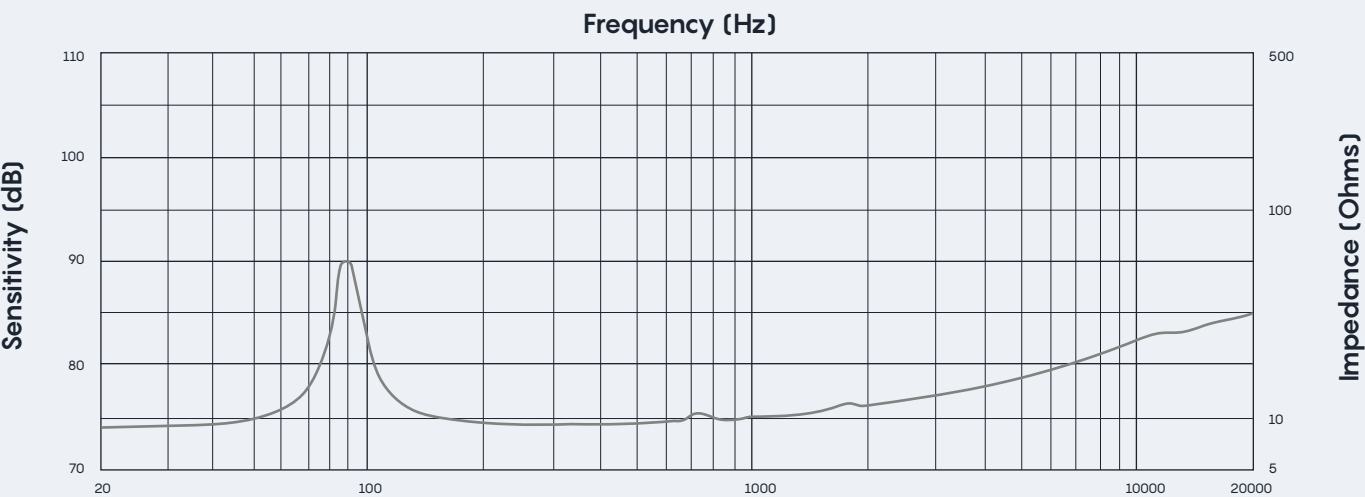

Contact Us

info@bataudio.com
www.bataudio.com
United Kingdom

