



CLING

Data Sheet

CLING 6II

Elevate Your Ambiance

The CLING Gen 2 series is a versatile line of ceiling speakers designed for both commercial and household markets. The speaker features a striking bright yellow paper cone and an Ultra-Narrow Frameless Magnetic Grilles that delivers a modern, stylish appearance while ensuring exceptional affordability.



Crystal Clear Sound, Always Heard

The speaker features high-quality 2-way coaxial drivers and precisely calibrated crossovers, providing clear, detailed sound with distinct treble and bass for outstanding audio performance.

Sleek Performance for Every Setting

Application: Ideal for boutique hotels, luxury homes, fine dining venues, luxury retail spaces, museums & galleries, and VIP lounges, the CLING series delivers the perfect balance of premium performance, refined style, and cost-effectiveness.

Technical Specifications

General Specification

Ceiling Speaker

Line Input:

100V / 8Ω

Rated Power:

20W

Max Power:

40W

Frequency Response:

55Hz-22KHz

Material:

Panel: ABS, Mesh: Iron

Colour:

Black

Speaker Unit:

6.5" Woofer + 1" Tweeter

Sensitivity (1w@1m):

88dB

Max Sensitivity:

106dB

Dimensions (LxH):

Ø 235x94mm

Cutout Size:

Ø 205mm

Installation Depth:

91mm



Installation:

4-Jaw Swivel Mounting Lugs

Net Weight:

1.36kg


Dimensions

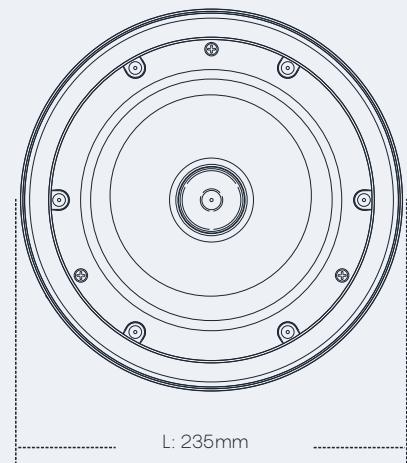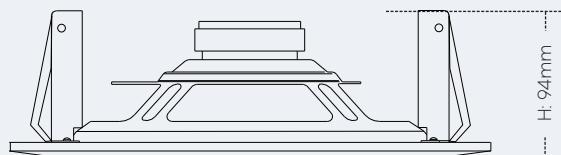


Technical Data

Ceiling Speaker

SPL

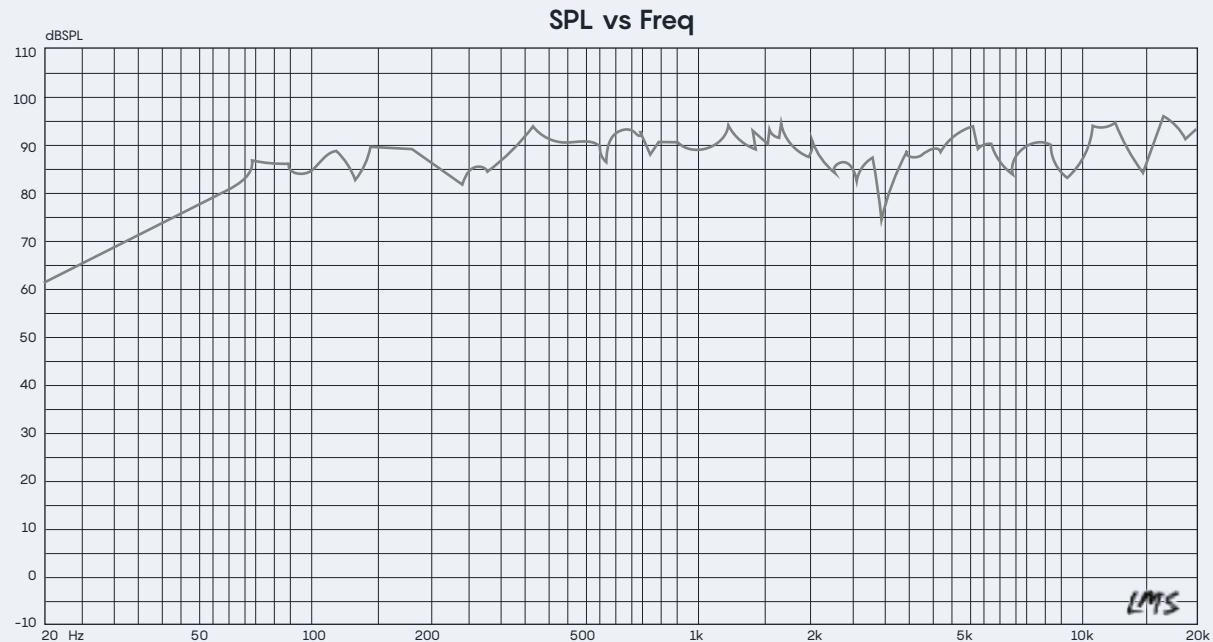

Impedance

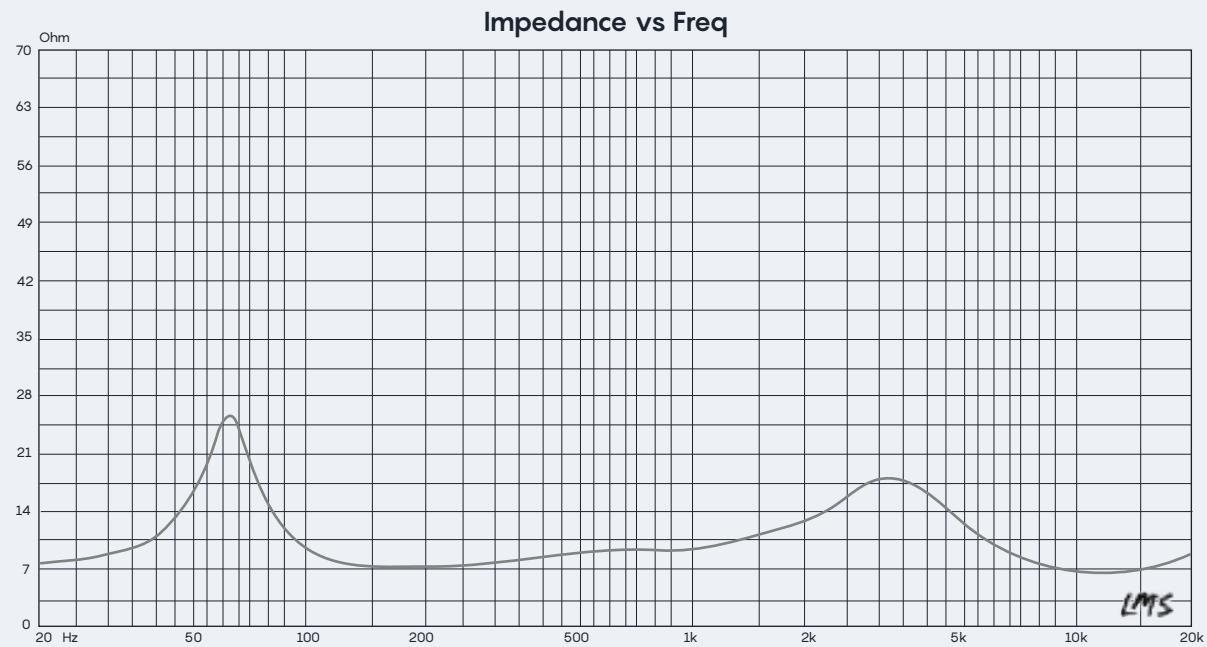

Contact Us

info@bataudio.com
www.bataudio.com
United Kingdom

 **BAT.**
BRITISH ACOUSTIC TECHNOLOGY