



AMP X II

Data Sheet

Key Features

AMPX II Series

When Performance Matters, Power it With AMPX II

The AMPX II series is a professional line of 2-channel rack-mount power amplifiers designed for public address systems, background music, and paging applications. Offering multiple power options and flexible output configurations, the AMPX II series ensures reliable performance across a wide range of installation environments.



Adaptable Audio, Pro-Level Performance.

The AMPX II series offers power ratings from 2×260W to 2×500W and supports both 70V/100V and 4-16Ω speaker systems, making it versatile for various sound setups. It features RCA I/O for easy signal routing and a sleek 2U aluminum alloy design for seamless rack integration.


Tough by Design. Trusted in Every Space.

Engineered with safety and durability in mind, the AMPX II series includes robust protection against short circuits, overload, over-temperature, and peak current. Whether used in commercial, educational, or hospitality settings, these amplifiers deliver dependable, high-quality audio power day in and day out.


Technical Specifications

Unit	AMPX II 260	AMPX II 360	AMPX II 500
Rated Power:	2 x 260W	2 x 360W	2 x 500W
Output Terminals:	4-16Ω & 70V / 100V		
LINE Input:	775mV / 10K Ω, Unbalanced 6.35 Interface		
Freq Response:	50Hz~18kHz ±3dB		
THD:	<0.5% at 1kHz, 1 / 3 Rated Power		
S/N:	≥90dB (A-Weighted)		
Controls:	2 Volume Control, Power On / Off		
Power Supply:	AC 220V — 50-60Hz		
Power Consumption:	945W	1309W	1550W
Dimension (DxWxH):	380x484x88mm		
Net Weight:	11.7kg	12.6kg	13.25kg
Gross Weight:	12.8kg	13.9kg	14.8Kg

Product Dimensions

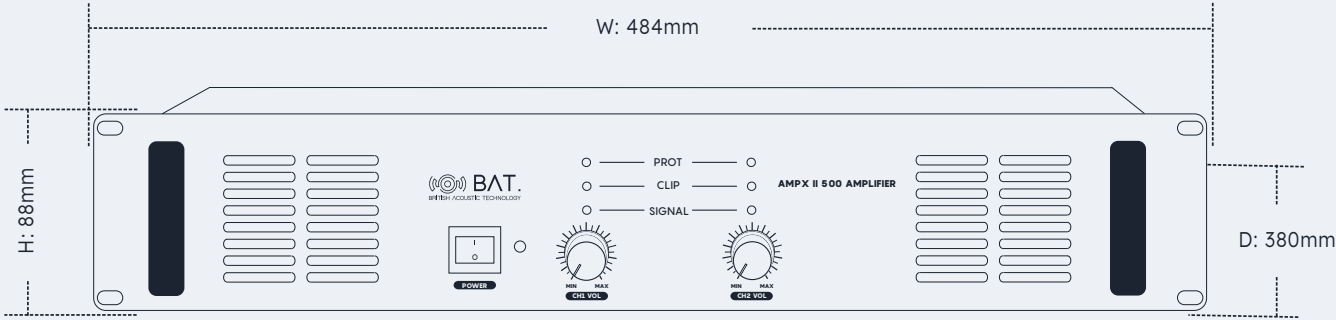

Rear Panel Overview

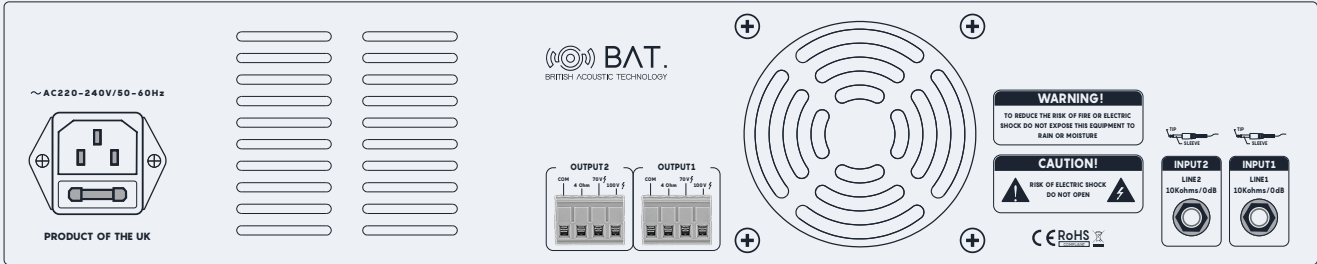

Contact Us

info@bataudio.com
www.bataudio.com
United Kingdom

 **BAT.**
BRITISH ACOUSTIC TECHNOLOGY