

# OMNI.Q 6

Data Sheet

# OMNI.Q 6

## Sound for All Seasons

The OMNI.Q series represents latest breakthrough in ultra-wide-range waterproof commercial speakers. Crafted with the industry's advanced manufacturing technology, each model is meticulously developed to deliver reliable, high-performance audio in any environment.



## All-Around Power, All-Weather Performance

The OMNI.Q series speakers deliver an ultra-wide sound range with crisp treble and powerful bass, all housed in an IEC529 IP55.

## Built to Adapt. Designed to Endure

Equipped with 70-100V/8 $\Omega$  selector switches, these speakers offer versatile power options and flexible installation, pendant, wall-mounted, or inground, along with a safety rope connection port for enhanced durability in all-weather conditions.



# Technical Specifications

| Unit                              | OMNI.Q 6                                                                                                                                                                            |
|-----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Rated Power:                      | 60W@100V; 90W@8Ω                                                                                                                                                                    |
| Max Power:                        | 90W@100V; 120W@8Ω                                                                                                                                                                   |
| Constant Voltage Impedance:       | 83Ω, 167Ω, 333Ω, 666Ω, 1.3kΩ                                                                                                                                                        |
| Constant Voltage Power Selection: | 100V: NC, 60W, 30W, 15W, 7.5W<br>70V: 60W, 30W, 15W, 7.5W, 3.7W                                                                                                                     |
| Sensitivity (1w@1m):              | 90dB                                                                                                                                                                                |
| Max Sensitivity:                  | 109dB@100V; 110dB@8Ω                                                                                                                                                                |
| Frequency Response:               | 53Hz~23kHz (-10dB)                                                                                                                                                                  |
| Mounting Method:                  | Three Types of Installation:<br><br>Inground Installation (With Mounting Chassis),<br><br>Wall-mounted (With Mounting Wall Bracket),<br><br>Pendant (With Steel Wire Mounting Rope) |
| Power Selection Method:           | Rotary Selector Switch                                                                                                                                                              |
| Material:                         | Enclosure: ABS; Mesh Cover: Stainless Steel,<br><br>Buried Underground Chassis: Iron                                                                                                |
| Colour:                           | Black, White, Brown                                                                                                                                                                 |


# Technical Specifications

| Unit                          | OMNI.Q 6                          |
|-------------------------------|-----------------------------------|
| Operating Conditions:         | -20°C~55°C; <95% Humidity         |
| Waterproof & Dustproof Grade: | IEC529 IP55                       |
| Speaker Unit:                 | 6.5" Woofer + 1" Tweeter          |
| Dimension (LxH):              | Ø 206x292mm                       |
| Inside Package Dimensions:    | 32x32x25.1cm                      |
| Net Weight:                   | 4.6kg                             |
| Gross Weight:                 | 19.7kg, 4pcs                      |
| Outer Package Dimensions:     | 0.1136CBM, 65.5x65.5x26.5cm, 4pcs |


## Dimensions

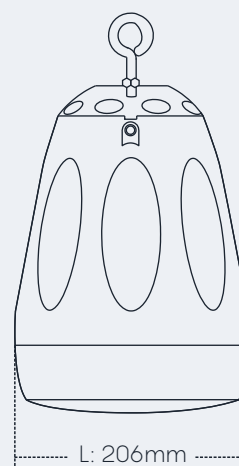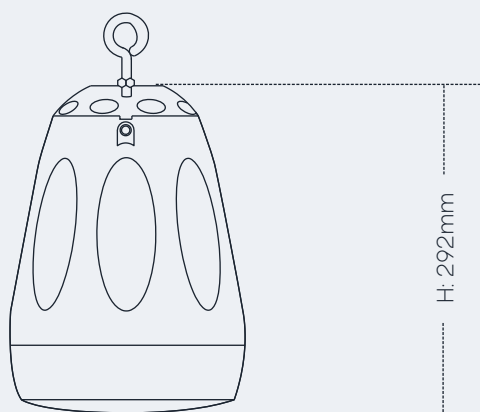


# Applications

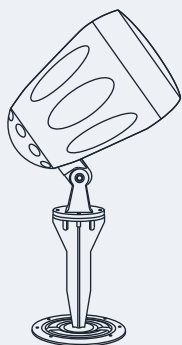

In-ground

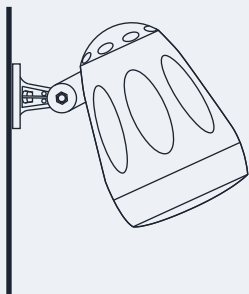

Wall-mounted

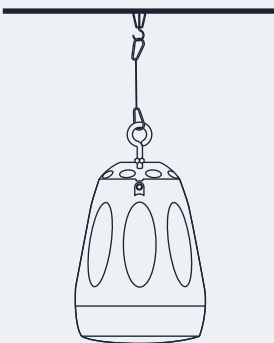


Pendant

# Technical Data

Multipurpose Speaker

## Frequency Response

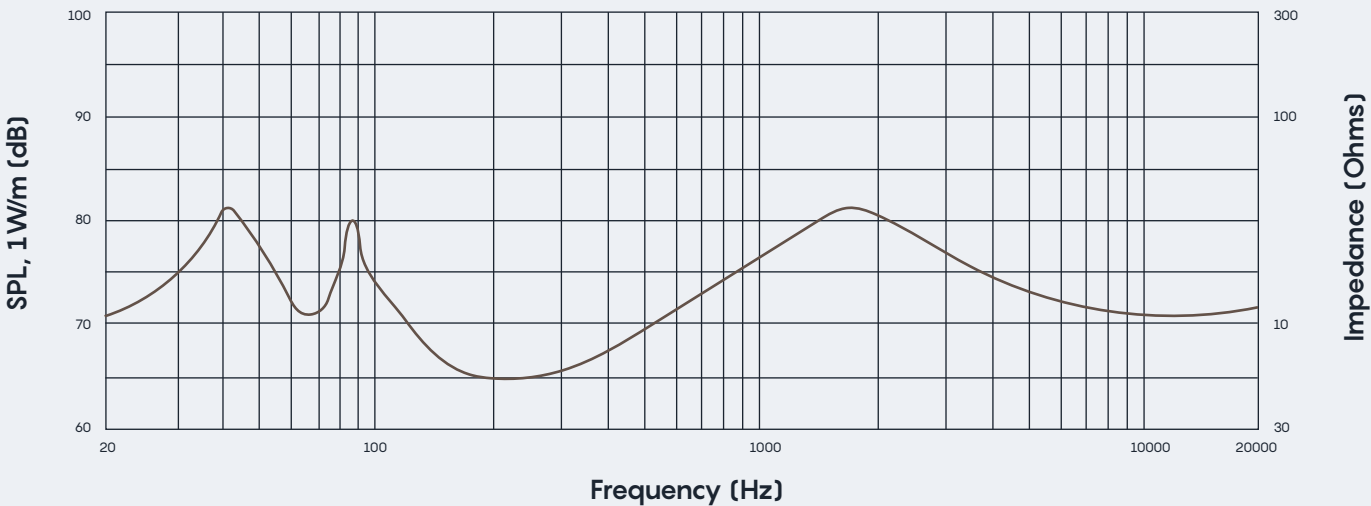

# Contact Us

---

info@bataudio.com  
www.bataudio.com  
United Kingdom

