

Standard septic installation can be a challenge in Hawai'i - Mata is ideal for areas with:

**SMALL
LOTS**



**STEEP
SLOPES**



**SHALLOW
BEDROCK**



**COASTAL
EXPOSURE**



**FLOOD
RISK**



Introducing the IAPMO Certified Mata Solid Waste Interceptor 

Mata[™] Solid Waste Interceptor is an IAPMO-certified aboveground septic tank alternative for residential applications. Pairing Mata with a converted seepage pit eliminates the need for expensive excavation during cesspool upgrades. Mata is not a composting system; it's designed to completely treat residential black and grey water loads, all monitored by an Orenco control panel you can trust.

Features

- Installed on-grade | Affordable, excavation-free.
- Primary Treatment Unit. 1:1 Septic tank replacement.
- Enhanced liquid effluent quality.
- Works with conventional plumbing fixtures.
- Wifi enabled for remote monitoring.
- IAPMO z1167 Listed Product
- Activated carbon-filtered air vent built in.

Technical Specifications


Weight	180 Lbs (All Components)
Power	120 V
Max Draw	5.5 Amps
Normal Draw	4.25 Amps
Resting Draw	0.4 Amps
Heater Power	300W
Flow Assist Pump	1/4 HP with gravity overflow
Material	LDPE, Fiberglass, PVC
Max Capacity per Unit	3 Bedrooms
Max Instantaneous Flow	21 GPM

Performance Testing

Total Suspended Solids: 90% Removal
BOD5: 87% Removal (Solid Fraction)
3rd party test results available at www.waihome.com/about




Elevation

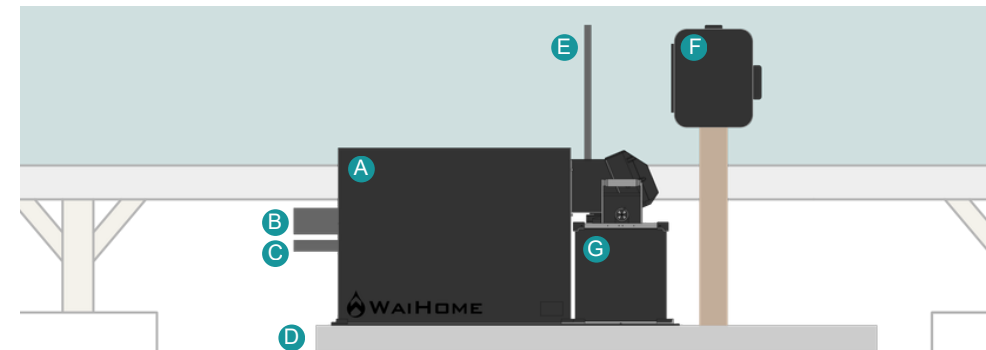

- A** Separator Tank
- B** 3" Sewer inlet.
- C** 1.5" Liquid effluent outflow.
- D** New or existing level foundation.
- E** 1" Exhaust vent.
- F** Orenco Control Panel
- G** Solids Drying Bin


How Mata Works

Wastewater flows into the Mata via the 3" inlet; an auger screen separates solids while liquids drain to the bottom of the separator tank. An auger diverts solids to the solids bin for drying. Separated liquids are pumped out via the effluent pipe to disposal.

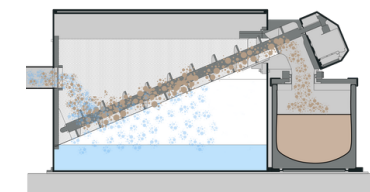


Solids Bin Exchange


Expect solids bins to be exchanged every 2 - 12 weeks based on home occupancy. Dried solids can be disposed or reused per local regulations.




Mata runs for 2-12 weeks.




Remove solids bin with aged solids.



Withdraw aged solids.
Slide fresh bin over for aging.



Insert new solids bag.



Position empty bin to receive new solids.

Product Dimensions

