

An isometric line drawing of a rectangular furniture frame, likely a bed or sofa base, showing the internal structure and corner joints. The drawing is composed of multiple parallel lines representing the frame's rails and legs, with small circles indicating fasteners or joints.

STRUCTA FURNITURE PANELS

TECHNICAL DATA SHEET

STRUCTA FURNITURE PANELS

TECHNICAL DATA SHEET



- Perforated steel Furniture panels work as part of the support structure system to provide a sturdy, permeable raised platform for laying surfaces, such as artificial grass and resin bound gravel, and installing planters off the ground, eliminating the need for a heavy, traditional, solid construction.
- Perforated Furniture Structure Panels allow free drainage and eliminate the requirement for a drainage board
- Manufactured from high performance galvanised steel that displays excellent resistance to atmospheric corrosion
- Fast and easy installation to create a strong, stable, external raised floor.

Find out more or request a sample

Email sales@raftsystems.com or visit raftsystems.com


STRUCTA FURNITURE PANELS

TECHNICAL DATA SHEET



Dimensions

TO FIT	MATERIAL	RECYCLED CONTENT	LENGTH	WIDTH	DEPTH	WEIGHT	QTY PER PALLET	SKU
50mm aluminium joist (weight 8.3kg)	Galvanised Steel	100% recyclable	540mm	540mm	48mm	8.8kg	100	320001
			540mm	440mm	48mm	7.3kg	100	320005
			540mm	390mm	48mm	6.6kg	100	320007
			540mm	240mm	48mm	4.4kg	100	320011
30mm aluminium joist (weight 7.8kg)	100% recyclable	100% recyclable	540mm	540mm	28mm	7.8kg	100	320003
			540mm	440mm	28mm	6.5kg	100	320006
			540mm	390mm	28mm	5.8kg	100	320008
			540mm	240mm	28mm	3.7kg	100	320012

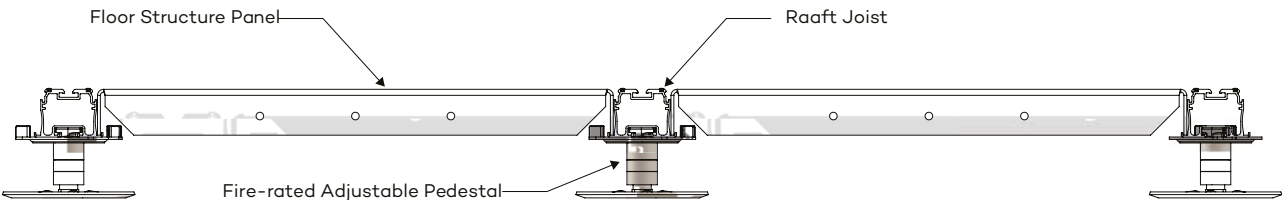

Works as part of the RAAFT terrace system

A key element of the system, these furniture structure panels create a sturdy, level raised access floor which opens a huge amount of opportunities for creative terraces.

Application

Roof terraces, balconies and other external areas.
Manufactured from pre galvanised steel to provide a high performance solution in normal environments.

Find out more or request a sample

Email sales@raftsystems.com or visit raftsystems.com

STRUCTA FURNITURE PANELS

TECHNICAL DATA SHEET



loading analysis



Loading analysis information has been collected using Finite Element Analysis. Please note the following information.

Point loading analysis on the Raft Furniture structure panels in mild steel, supported along its width by the Raft Joist system, and the surface covered in rubber to simulate safety surfacing.

In this instance, the tray will take a load of 150kg in the centre of the tile for a deflection of 5mm. Under these conditions the tray has a factor of safety of 1.5.

Soil loading analysis on Raft Furniture structure panels in mild steel, supported along its width by the Raft Joist system.

Soil load of 18kN/m². The soil load of 18kN/m² will produce a maximum deflection of 6.6mm in the centre of the tray. However, the safety factor is only 0.9 giving a risk of failure under this loading. It would not be recommended to use mild steel for the trays unless the load is below 11kN/m², i.e. 600mm soil depth.

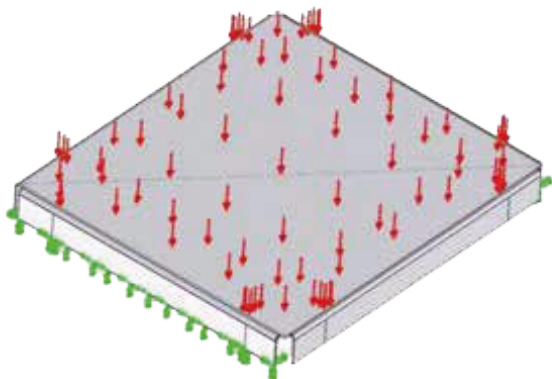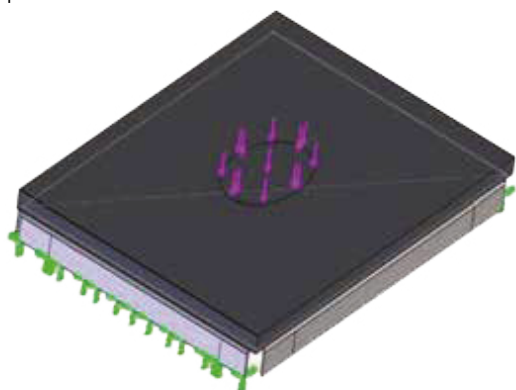

Storage and handling

Steel floor structure panels are typically palletized and wrapped to ensure stability during transport.

A single pallet will normally transport 50 floor panels.

Panels should ideally be stored in a sheltered location prior to installation however it will not detriment the items if this is not possible.

Installers should be aware of the edges of the steel panels in case they are sharp - protective gloves should be worn at all times when handling the panels.

The following guidelines may be useful:

- a) **Each person should be fully trained in manual handling techniques.**
- b) **The use of handling aids such as a trolley, folk-lift, pallet truck or conveyor should be used if moving large volumes of panels.**
- c) **Break up large consignments into more manageable loads.**
- d) **Ensure that the product is stored at a reasonable height, so avoiding the lifting of panels from floor level or above shoulder height.**
- e) **Reduce carrying distances of panels.**

Fire rated

Fire rated in accordance with BS EN 13501-1 to achieve a BROOF(t4) classification. Consult our certification documents for verification.

Find out more or request a sample

Email sales@raftsystems.com or visit raftsystems.com