


Radically Efficient Modular Lighting

CLIQ™ Modular Low Voltage Lighting System

Designed for Rapid Installation in Large Spaces and Data Centers

CLIQ is the innovative, reusable, linear LED system that reduces labor, material, waste and time by over 85% compared to traditional lighting installations. Operating at 48V Class 2 low voltage, CLIQ is designed for tool-less, quick connection to popular strut channel systems using a patented "CLIQ and Go" system. CLIQ can be installed as both temporary and permanent lighting with available fascia.

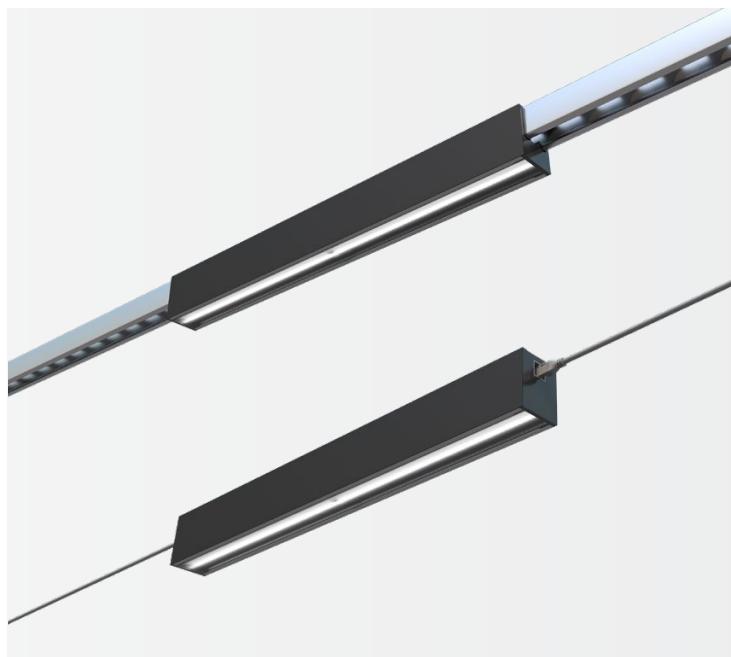

PERFORMANCE

Warranty	5 Years
IP Rating	IP54
Rated Life	L70 50,000 Hours
Operating Temperature	-20°C to 40°C (-4°F to 104°F)
CCT	4000K
CRI	>80
Delivered Lumens	3870 Lumens / 24" Fixture
Certifications*	Damp Location, UL

*Certifications pending.

PHYSICAL

Housing Material	24" Extruded Aluminum
Mounting	Surface or Strut Channel System
Lens	Linear Prismatic Optical Spread Lens
Cable / Connectors	UF Rated 90' Leader, 3' / 6' / 10' Jumper, 16 AWG Class 2 Wire, Molex Connectors
Finish	Black Anodized Aluminum, Magnetic Fascia Accessory*
Kit Dimensions	18" x 24" x 12"
Kit Weight	45 lbs.

*Magnetic Fascia Accessory must be specified. Not required for fixture installation or use.

ELECTRICAL

Voltage	48V DC (Class 2)
Power Factor	>0.95
Dimmable	Yes (via compatible controller)

ENERGY CHART

DELIVERED LUMENS	WATTAGE	EFFICACY (lm / w)
3870 Lumens / 24" Fixture	24 / 24" Fixture	161

ORDERING LOGIC

EX: CLIQ-U-24-24-B-F-BK

CLIQ	MOUNTING	Fixture Length	Wattage	OPTICS	FASCIA	FASCIA FINISH
	S - SURFACE	24 - 24"	24W - 24W	S - SYMMETRIC	F - FASCIA	BK - BLACK
	U - STRUT CHANNEL			N - NARROW	X - NONE	** - CUSTOM
				W - WIDE		X - NONE
				B - BATWING		
				A - ASYMMETRIC		




Radically Efficient Modular Lighting

ACCESSORIES (Ordered Separately)



ACCESSORY	ORDERING LOGIC	ACCESSORY	ORDERING LOGIC
Cables			
10" Extender Cable	CLIQ-EXTENDER-CABLE-10	Fascia Clip	CLIQ-CLIP-END
22" Extender Cable	CLIQ-EXTENDER-CABLE-22	Fascia Clip Magnet	CLIQ-CLIP-END-MAGNET
34" Extender Cable	CLIQ-EXTENDER-CABLE-34	Fascia Endcap	CLIQ-FASCIA-ENDCAP
58" Extender Cable	CLIQ-EXTENDER-CABLE-58	Fascia Plate-Finish	CLIQ-FASCIA-**
118" Extender Cable	CLIQ-EXTENDER-CABLE-118	Fascia Spacer	CLIQ-FASCIA-SPACER
10" Internal Jumper	CLIQ-JUMPER-INTERNAL-10	Mounting	
10" Jumper	CLIQ-JUMPER-CABLE-10	3/8" Bolt	CLIQ-CLIP-BOLT
22" Jumper	CLIQ-JUMPER-CABLE-22	6" Wire Harness	CLIQ-CLIP-CENTER-WIRE
34" Jumper	CLIQ-JUMPER-CABLE-34	Anchor Screw	CLIQ-CLIP-CENTER-ANCHOR
58" Jumper	CLIQ-JUMPER-CABLE-58	Center Mount Clip	CLIQ-CLIP-CENTER
118" Jumper	CLIQ-JUMPER-CABLE-118	Center Mount Clip Magnet	CLIQ-CLIP-CENTER-MAGNET
50' Leader	CLIQ-LEADER-CABLE-50	Center Mount Endcap	CLIQ-CLIP-CENTER-ENDCAP
100' Leader	CLIQ-LEADER-CABLE-100	Housing Endcap	CLIQ-BAR-ENDCAP
Driver		PVC U Channel Clip	CLIQ-CLIP-CENTER-U
24W Power Supply	CLIQ-POWER-SUPPLY-**	Prismatic Lens	
Emergency Inverter	CLIQ-POWER-INVERTER-**	Asymmetric Optics	CLIQ-BAR-24-LENS-A
Extrusion		Batwing Optics	CLIQ-BAR-24-LENS-B
24" Aluminum Housing	CLIQ-BAR-EXTRUSION-24	Narrow Optics	CLIQ-BAR-24-LENS-N
Channel Covers	CLIQ-CHANNEL-COVER	Symmetric Optics	CLIQ-BAR-24-LENS-S
		Wide Optics	CLIQ-BAR-24-LENS-W

MOUNTING OPTIONS

Strut Channel System

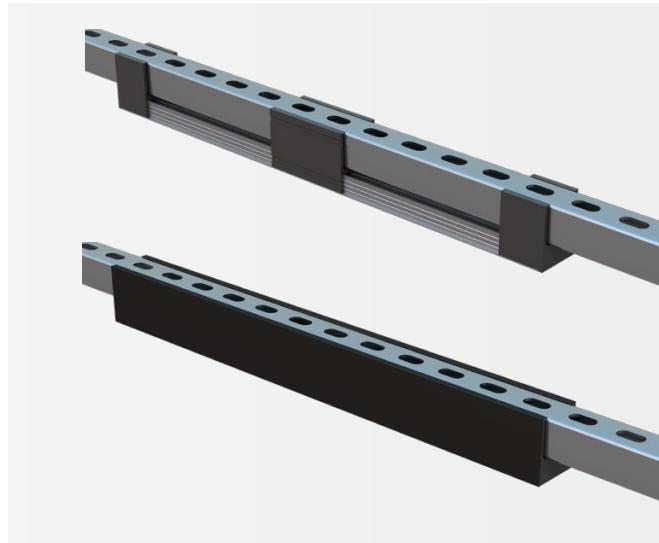

Surface Mount

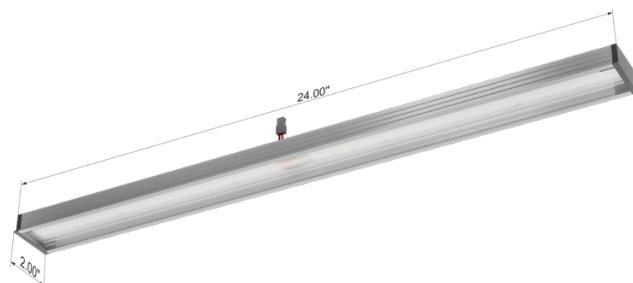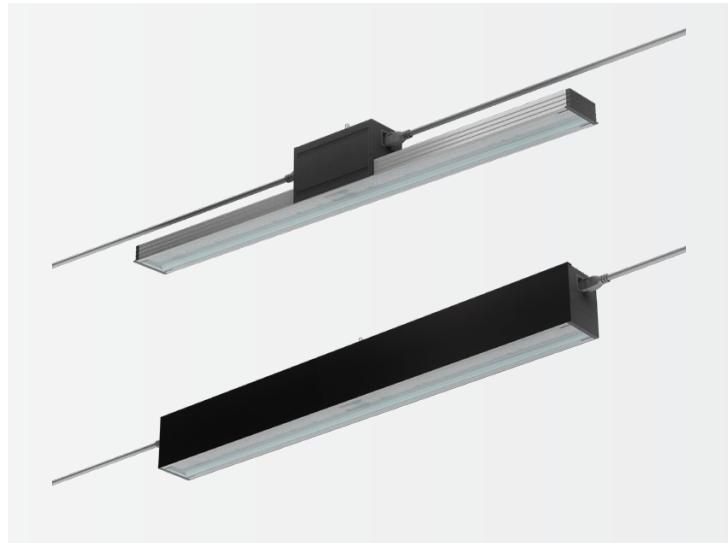




Radically Efficient Modular Lighting

CLIQ CLIP + CABLE SPECIFICATIONS


Clip Mount



Surface Mount End Cap View

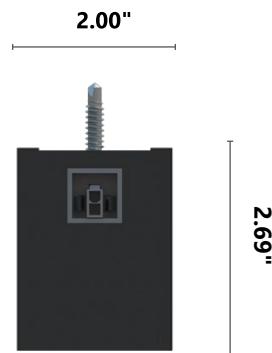

Cable



POWER SUPPLY ENCLOSURE DIMENSIONS

