




Radically Efficient Modular Lighting

CLIQ™. MODULAR LOW VOLTAGE LIGHTING SYSTEM

Designed for Rapid Installation in Large Spaces and Data Centers.

CLIQ™ is the innovative, linear LED system that reduces labor, material, waste and time by over 85% compared to traditional lighting installations. Operating at 48V Class 2 low voltage, CLIQ is designed for tool-less*, quick connection to popular strut channel systems using a patented **CLIQ and Go** system. CLIQ can be installed with or without available decorative fascia.

*Strut channel applications.

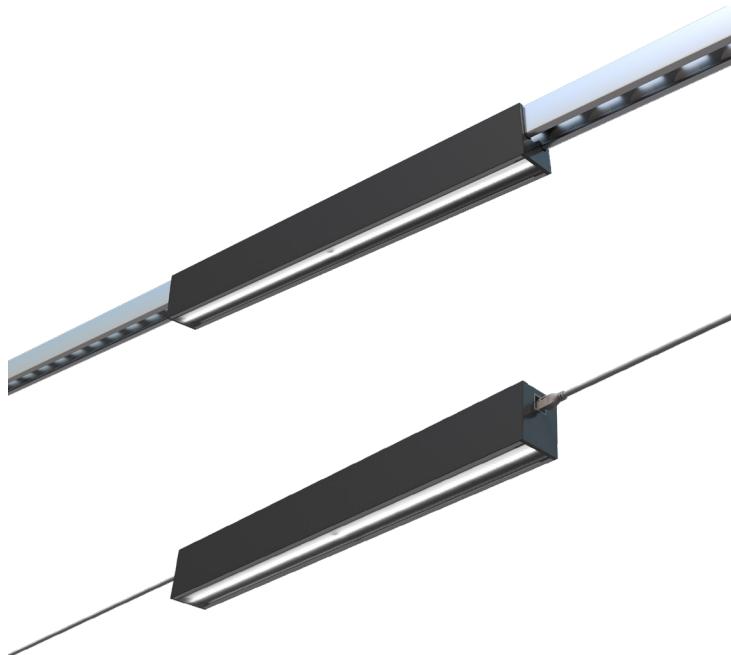

PERFORMANCE

Warranty	5 Years
IP Rating	IP54
Rated Life	L70 50,000 Hours
Operating Temperature	-20°C to 40°C (-4°F to 104°F)
CCT	4000K
CRI	>80
Delivered Lumens	3870 Lumens / 24" Fixture
Certifications*	Damp Location, UL

*Certifications pending.

PHYSICAL

Housing Material	24" Extruded Aluminum
Mounting	Surface or Strut Channel System
Lens	Linear Prismatic Optical Spread Lens
Cable / Connectors	UF Rated 90' Leader, 3'6"/10' Jumper, 16 AWG Class 2 Wire, Molex Connectors
Finish	Black Anodized Aluminum, Magnetic Fascia Accessory*
Kit Dimensions	18" x 24" x 12"
Kit Weight	45 lbs.

*Magnetic Fascia Accessory must be specified. Not required for fixture installation or use.

ENERGY CHART

DELIVERED LUMENS	WATTAGE	EFFICACY (lm / w)
3870 Lumens / 24" Fixture	24 / 24" Fixture	196

ELECTRICAL

Voltage	48V DC (Class 2)
Power Factor	>0.95
Dimmable	Yes (via compatible controller)

ORDERING LOGIC

EX: CLIQ-U-24-24-B-F-BK

MOUNTING	Fixture Length	Wattage	OPTICS	FASCIA	FASCIA FINISH
CLIQ					
S - SURFACE	24 - 24"	24W - 24W	S - SYMMETRIC	F - FASCIA	BK - BLACK
U - STRUT CHANNEL			N - NARROW	X - NONE	** - CUSTOM
			W - WIDE		X - NONE
			B - BATWING		
			A - ASYMMETRIC		




Radically Efficient Modular Lighting

ACCESSORIES (ORDERED SEPARATELY)


ACCESSORY	ORDERING LOGIC	ACCESSORY	ORDERING LOGIC
Cables			
10" Extender Cable	CLIQ-EXTENDER-CABLE-10	Fascia Clip	CLIQ-CLIP-END
22" Extender Cable	CLIQ-EXTENDER-CABLE-22	Fascia Clip Magnet	CLIQ-CLIP-END-MAGNET
34" Extender Cable	CLIQ-EXTENDER-CABLE-34	Fascia Endcap	CLIQ-FASCIA-ENDCAP
58" Extender Cable	CLIQ-EXTENDER-CABLE-58	Fascia Plate-Finish	CLIQ-FASCIA-**
118" Extender Cable	CLIQ-EXTENDER-CABLE-118	Fascia Spacer	CLIQ-FASCIA-SPACER
10" Internal Jumper	CLIQ-JUMPER-INTERNAL-10	Mounting	
10" Jumper	CLIQ-JUMPER-CABLE-10	3/8" Bolt	CLIQ-CLIP-BOLT
22" Jumper	CLIQ-JUMPER-CABLE-22	6" Wire Harness	CLIQ-CLIP-CENTER-WIRE
34" Jumper	CLIQ-JUMPER-CABLE-34	Anchor Screw	CLIQ-CLIP-CENTER-ANCHOR
58" Jumper	CLIQ-JUMPER-CABLE-58	Center Mount Clip	CLIQ-CLIP-CENTER
118" Jumper	CLIQ-JUMPER-CABLE-118	Center Mount Clip Magnet	CLIQ-CLIP-CENTER-MAGNET
50' Leader	CLIQ-LEADER-CABLE-50	Center Mount Endcap	CLIQ-CLIP-CENTER-ENDCAP
100' Leader	CLIQ-LEADER-CABLE-100	Housing Endcap	CLIQ-BAR-ENDCAP
Driver			
24W Power Supply	CLIQ-POWER-SUPPLY-**	Prismatic Lens	
Emergency Inverter	CLIQ-POWER-INVERTER-**	Asymmetric Optics	CLIQ-BAR-24-LENS-A
Extrusion			
24" Aluminum Housing	CLIQ-BAR-EXTRUSION-24	Batwing Optics	CLIQ-BAR-24-LENS-B
Channel Covers	CLIQ-CHANNEL-COVER	Narrow Optics	CLIQ-BAR-24-LENS-N
		Symmetric Optics	CLIQ-BAR-24-LENS-S
		Wide Optics	CLIQ-BAR-24-LENS-W

MOUNTING OPTIONS

Strut Channel System

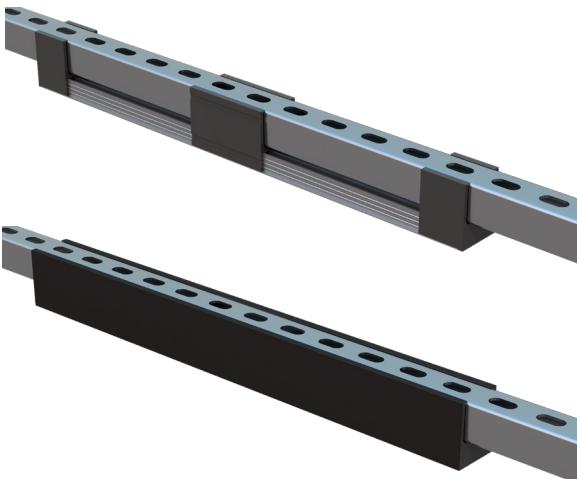

Surface Mount

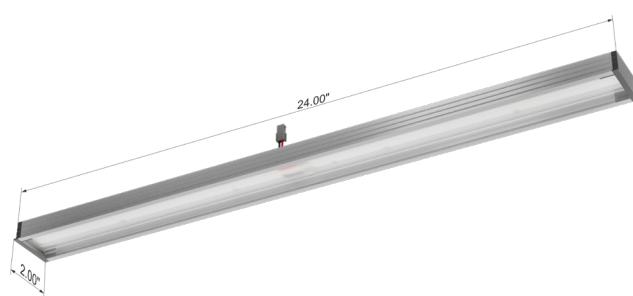




Radically Efficient Modular Lighting

CLIQ CLIP + CABLE SPECIFICATIONS


Clip Mount



Surface Mount End Cap View

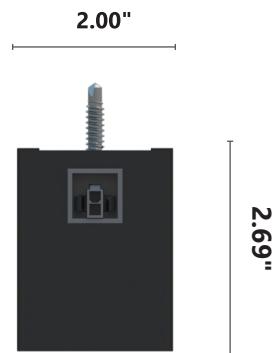

Cable



POWER SUPPLY ENCLOSURE DIMENSIONS

