




Radically Efficient Modular Lighting

CLIQ™ MODULAR LOW VOLTAGE LIGHTING SYSTEM

Designed for Rapid Installation in Large Spaces and Data Centers.

CLIQ™ is the innovative, linear LED system that reduces labor, material, waste and time by over 85% compared to traditional lighting installations. Operating at 48V Class 2 low voltage, CLIQ is designed for tool-less*, quick connection to popular strut channel systems and other mounting conditions using our patented **CLIQ and Go** system.

*Strut channel applications.

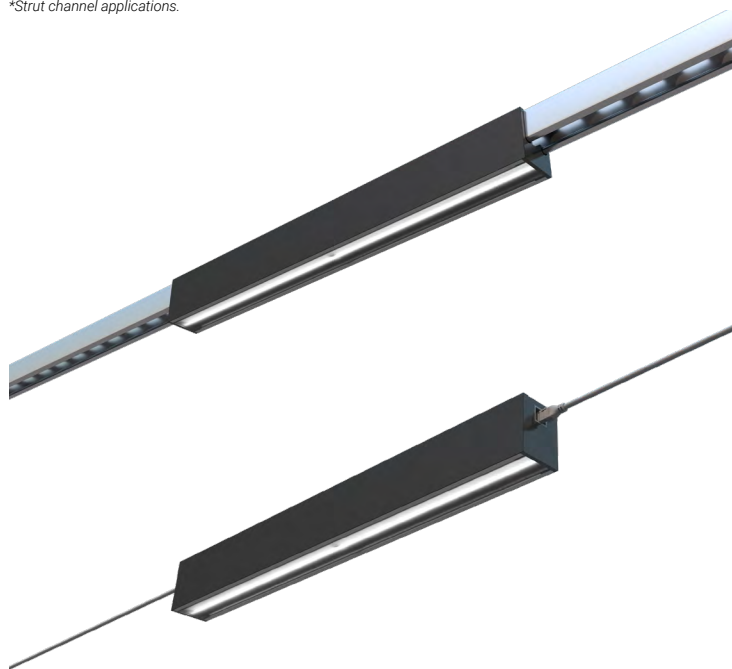

ENERGY CHART

SIZE	DELIVERED LUMENS	WATTAGE	EFFICACY (LM/W)
2' (24")	2017 / 4034	12W / 24W	170
4' (48")	4034 / 8068	24W / 48W	170

*Wide Lens Optic.

ORDERING LOGIC

EX: CLIQ-U-24-24W-940-B-OS-BK

CLIQ	MOUNTING	LENGTH	WATTAGE*	CRI / CCT	OPTICS	OCCUPANCY SENSOR	FASCIA FINISH
	A - Aluminum Strut	24 - 2'	12W - 12W**	835 - 80CRI / 3500K	A - Asymmetric	BLANK - None	BK - Black
	G - Structural Grid	48 - 4'	24W - 24W	840 - 80CRI / 4000K	B - Batwing	OS - Sensor	WH - White
	S - Surface		48W - 48W†	850 - 80CRI / 5000K	N - Narrow		** - Custom
	T - T-Grid			8FS - 80CRI / 5FS	S - Symmetric		
	U - Steel Strut			935 - 90CRI / 3500K	W - Wide		
				940 - 90CRI / 4000K			
				950 - 90CRI / 5000K			

*Refer to Energy Chart for length and wattage options.

**Available on 2' fixture only.

†Available on 4' fixture only.

SPECIFICATIONS AND DETAILS ARE SUBJECT TO CHANGE WITHOUT NOTIFICATION. CONTACT SHIFT INNOVATIONS FOR DETAILS
CLIQ™ • PATENT PENDING • CLIQLIGHTING.COM



PERFORMANCE

Warranty	5 Years
IP Rating	IP54
Rated Life	L70 50,000 Hours
Operating Temperature	-20°C to 55°C (-4°F to 131°F)
Certifications	Damp Location, FCC, Plenum* (CL2P), UL, ULC
CCT	3500K, 4000K, 5000K, 5CCT Selectable
CRI	>80, >90

*Plenum must be specified.

PHYSICAL

Housing Material	Extruded Aluminum
Clip Material	Injection Molded Composite
Mounting Type	Surface, Strut Channel, Structural Grid, T-Grid
Lens	Linear Prismatic Optical Spread Lens
Cable / Connectors (Included)	UF Rated Leader/Jumper, 16 AWG Class 2 Wire, Molex Connectors Plenum-Rated (CL2P) Contact Factory
Fixture Dimensions	2': 24"L x 2"W x 2.6"H 4': 48"L x 2"W x 2.6"H
Fixture Weight	2': 2.17 lbs 4': 4.34 lbs
Fascia Material	Black or White Powder Coated Steel
Fascia Weight (Pair)	2': 1.54 lbs 4': 3.08 lbs

ELECTRICAL

Voltage	48V DC (Class 2)
Power Factor	>0.95
Dimmable	0-10V and Pulse Width Modulation (PWM) using CLIQ Power Supply



Radically Efficient Modular Lighting

ACCESSORIES (ORDERED SEPARATELY)

EX: CLIQ-JUMP-22

Standard stock assemblies shown below, black cables. Custom configurations and finishes available upon request.

ACCESSORY	ORDERING LOGIC
1' Cable, Connects Fixture to Fixture, Two Plug Ends	CLIQ-CABLE-001
2' Cable, Connects Fixture to Fixture, Two Plug Ends	CLIQ-CABLE-002
3' Cable, Connects Fixture to Fixture, Two Plug Ends	CLIQ-CABLE-003
4' Cable, Connects Fixture to Fixture, Two Plug Ends	CLIQ-CABLE-004
5' Cable, Connects Fixture to Fixture, Two Plug Ends	CLIQ-CABLE-005
6' Cable, Connects Fixture to Fixture, Two Plug Ends	CLIQ-CABLE-006
7' Cable, Connects Fixture to Fixture, Two Plug Ends	CLIQ-CABLE-007
8' Cable, Connects Fixture to Fixture, Two Plug Ends	CLIQ-CABLE-008
9' Cable, Connects Fixture to Fixture, Two Plug Ends	CLIQ-CABLE-009
10' Cable, Connects Fixture to Fixture, Two Plug Ends	CLIQ-CABLE-010
25' Cable, Connects Power Supply Enclosure to Fixture or Fixture to Fixture, Two Plug Ends	CLIQ-CABLE-025
50' Cable, Connects Power Supply Enclosure to Fixture or Fixture to Fixture, Two Plug Ends	CLIQ-CABLE-050
100' Cable, Connects Power Supply Enclosure to Fixture or Fixture to Fixture, Two Plug Ends	CLIQ-CABLE-100
Cable, Custom* Length	CLIQ-CABLE-***
1' Extender Cable, Extends a Jumper or Leader Cable in order to Extend Cable Length, One Plug End, One Receptacle End	CLIQ-EXT-001
2' Extender Cable, Extends a Jumper or Leader Cable in order to Extend Cable Length, One Plug End, One Receptacle End	CLIQ-EXT-002
3' Extender Cable, Extends a Jumper or Leader Cable in order to Extend Cable Length, One Plug End, One Receptacle End	CLIQ-EXT-003
4' Extender Cable, Extends a Jumper or Leader Cable in order to Extend Cable Length, One Plug End, One Receptacle End	CLIQ-EXT-004
5' Extender Cable, Extends a Jumper or Leader Cable in order to Extend Cable Length, One Plug End, One Receptacle End	CLIQ-EXT-005
6' Extender Cable, Extends a Jumper or Leader Cable in order to Extend Cable Length, One Plug End, One Receptacle End	CLIQ-EXT-006
7' Extender Cable, Extends a Jumper or Leader Cable in order to Extend Cable Length, One Plug End, One Receptacle End	CLIQ-EXT-007
8' Extender Cable, Extends a Jumper or Leader Cable in order to Extend Cable Length, One Plug End, One Receptacle End	CLIQ-EXT-008
9' Extender Cable, Extends a Jumper or Leader Cable in order to Extend Cable Length, One Plug End, One Receptacle End	CLIQ-EXT-009
10' Extender Cable, Extends a Jumper or Leader Cable in order to Extend Cable Length, One Plug End, One Receptacle End	CLIQ-EXT-010
Extender Cable, Custom* Length	CLIQ-EXT-***
1' Plenum-Rated (CL2P) Cable, Connects Fixture to Fixture, Two Plug Ends	CLIQ-P-CABLE-001
2' Plenum-Rated (CL2P) Cable, Connects Fixture to Fixture, Two Plug Ends	CLIQ-P-CABLE-002
3' Plenum-Rated (CL2P) Cable, Connects Fixture to Fixture, Two Plug Ends	CLIQ-P-CABLE-003
4' Plenum-Rated (CL2P) Cable, Connects Fixture to Fixture, Two Plug Ends	CLIQ-P-CABLE-004
5' Plenum-Rated (CL2P) Cable, Connects Fixture to Fixture, Two Plug Ends	CLIQ-P-CABLE-005
6' Plenum-Rated (CL2P) Cable, Connects Fixture to Fixture, Two Plug Ends	CLIQ-P-CABLE-006
7' Plenum-Rated (CL2P) Cable, Connects Fixture to Fixture, Two Plug Ends	CLIQ-P-CABLE-007
8' Plenum-Rated (CL2P) Cable, Connects Fixture to Fixture, Two Plug Ends	CLIQ-P-CABLE-008
9' Plenum-Rated (CL2P) Cable, Connects Fixture to Fixture, Two Plug Ends	CLIQ-P-CABLE-009
10' Plenum-Rated (CL2P) Cable, Connects Fixture to Fixture, Two Plug Ends	CLIQ-P-CABLE-010
25' Plenum-Rated (CL2P) Cable, Connects Power Supply Enclosure to Fixture or Fixture to Fixture, Two Plug Ends	CLIQ-P-CABLE-025
50' Plenum-Rated (CL2P) Cable, Connects Power Supply Enclosure to Fixture or Fixture to Fixture, Two Plug Ends	CLIQ-P-CABLE-050
100' Plenum-Rated (CL2P) Cable, Connects Power Supply Enclosure to Fixture or Fixture to Fixture, Two Plug Ends	CLIQ-P-CABLE-100
Plenum-Rated (CL2P) Cable, Custom* Length	CLIQ-P-CABLE-***
1' Plenum-Rated (CL2P) Extender Cable, Extends a Jumper or Leader Cable in order to Extend Cable Length, One Plug End, One Receptacle End	CLIQ-P-EXT-001
2' Plenum-Rated (CL2P) Extender Cable, Extends a Jumper or Leader Cable in order to Extend Cable Length, One Plug End, One Receptacle End	CLIQ-P-EXT-002
3' Plenum-Rated (CL2P) Extender Cable, Extends a Jumper or Leader Cable in order to Extend Cable Length, One Plug End, One Receptacle End	CLIQ-P-EXT-003
4' Plenum-Rated (CL2P) Extender Cable, Extends a Jumper or Leader Cable in order to Extend Cable Length, One Plug End, One Receptacle End	CLIQ-P-EXT-004
5' Plenum-Rated (CL2P) Extender Cable, Extends a Jumper or Leader Cable in order to Extend Cable Length, One Plug End, One Receptacle End	CLIQ-P-EXT-005
6' Plenum-Rated (CL2P) Extender Cable, Extends a Jumper or Leader Cable in order to Extend Cable Length, One Plug End, One Receptacle End	CLIQ-P-EXT-006
7' Plenum-Rated (CL2P) Extender Cable, Extends a Jumper or Leader Cable in order to Extend Cable Length, One Plug End, One Receptacle End	CLIQ-P-EXT-007
8' Plenum-Rated (CL2P) Extender Cable, Extends a Jumper or Leader Cable in order to Extend Cable Length, One Plug End, One Receptacle End	CLIQ-P-EXT-008
9' Plenum-Rated (CL2P) Extender Cable, Extends a Jumper or Leader Cable in order to Extend Cable Length, One Plug End, One Receptacle End	CLIQ-P-EXT-009
10' Plenum-Rated (CL2P) Extender Cable, Extends a Jumper or Leader Cable in order to Extend Cable Length, One Plug End, One Receptacle End	CLIQ-P-EXT-010
Plenum-Rated (CL2P) Extender Cable, Custom* Length	CLIQ-P-EXT-***
1' Channel Cover, Standard Gray, Field Cuttable	CLIQ-CHANNEL-001
2' Channel Cover, Standard Gray, Field Cuttable	CLIQ-CHANNEL-002
3' Channel Cover, Standard Gray, Field Cuttable	CLIQ-CHANNEL-003
4' Channel Cover, Standard Gray, Field Cuttable	CLIQ-CHANNEL-004
Channel Cover, 1' / 2' / 3' / 4', Custom* Finish	CLIQ-CHANNEL-XXX-**
End-to-End Connector for Continuous Runs, Black or White Finish	CLIQ-CONNECT-E2E-**


*Custom lengths and finishes may add lead time.




Radically Efficient Modular Lighting

MOUNTING OPTIONS


Strut Channel System

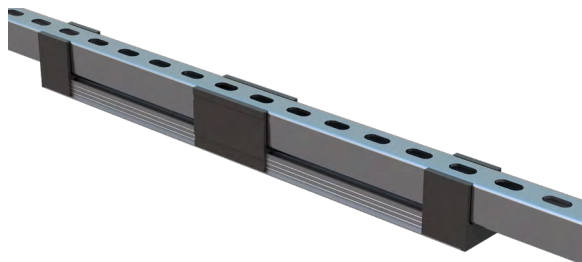


Surface & Structural Grid Mount

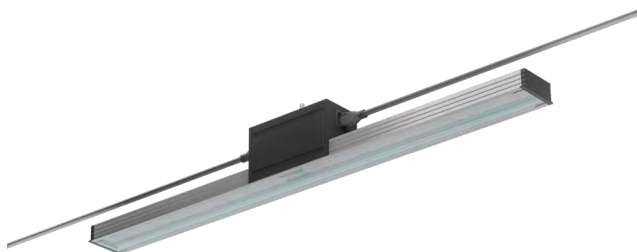


With Fascia

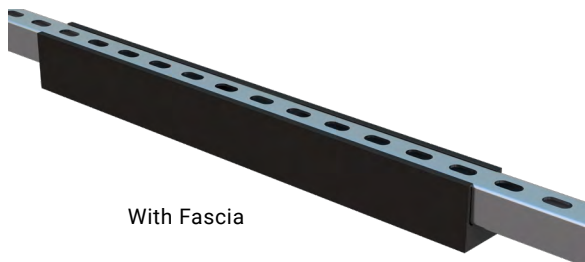

With Fascia and End Caps

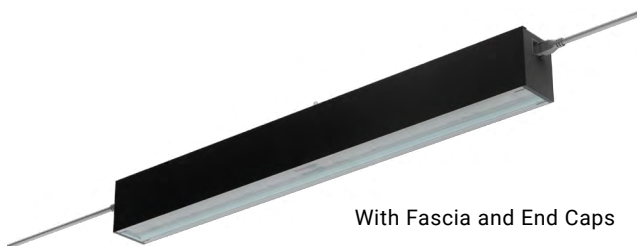

FIXTURE DIMENSIONS

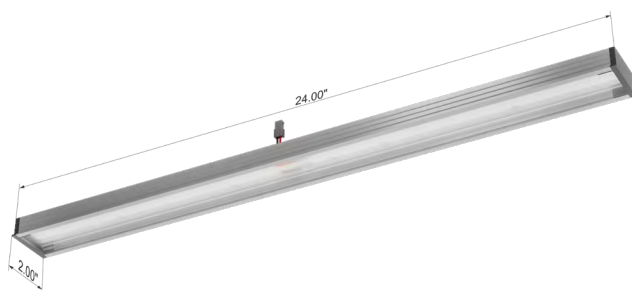


CLIQ CLIP + CABLE DIMENSIONS


Strut Channel Clip Mount




Surface & Structural Grid Clip Mount




T-Grid Clip Mount




**Surface & Structural Grid Mount
End Cap View
2.00"**



Cable





Extender Cable




ACCESSORIES (OPTIONAL)

Occupancy Sensor

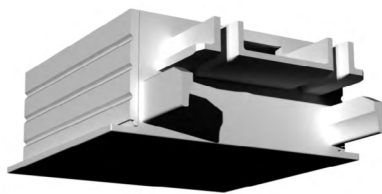

End-To-End Connector

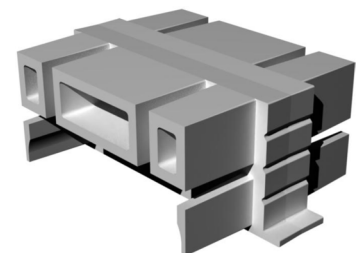

Occupancy Sensor Wire Adapter

