

BU 404


Socket

Ø 4mm

30 V_{AC} / 60 V_{DC}

32 A

- not insulated
- hole Ø 6.1 mm
- for fixture in panels from 1.5 mm up to 11 mm thick

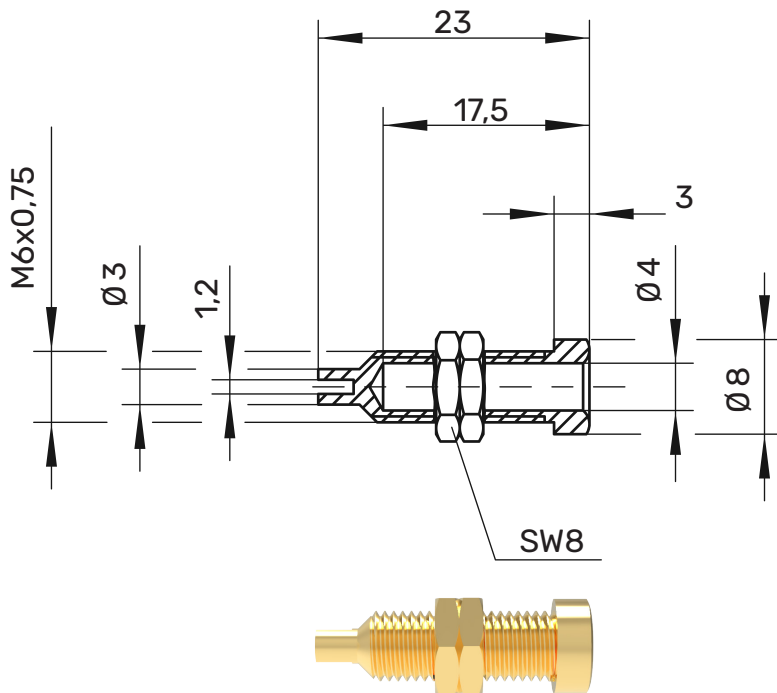

General information

Order No. ¹⁾

BU 404 Ni | Au

contact parts

nickel-plated | **gold-plated**

Technical data

terminal	solder terminal, solder lug or cable lug
transition resistance	10 mΩ (Ni) / 4 mΩ (Au)
rated voltage ²⁾	30 V _{AC} / 60 V _{DC}
rated current ²⁾	32 A
operating temperature	from -40 °C to +110 °C

¹⁾ other contact platings on request
²⁾ at normal ambient temperatures

BU 404

Ni

Au

99000504

99000505