



## KU 320


### Coupler

Ø 4 mm

30 V<sub>AC</sub> / 60 V<sub>DC</sub>

16 A

- socket terminal on both sides
- with insulation

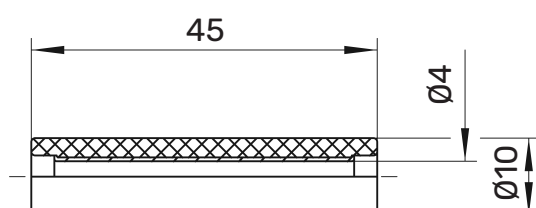

#### General information

Order No. <sup>1)</sup>	<b>KU 320 (colour)</b>
colours	black, red, blue, yellow, green
contact parts	brass
insulation	ABS

#### Technical data

terminal	2 x inline socket
transition resistance	3 mΩ
rated voltage <sup>2)</sup>	30 V <sub>AC</sub> / 60 V <sub>DC</sub>
rated current <sup>2)</sup>	16 A
operating temperature	from -10 °C to +70 °C

<sup>1)</sup> other contact platings, colours and sleeves for other cable diameter on request  
<sup>2)</sup> at normal ambient temperatures

**KU 320**

Ms

●	SW	Schwarz	Black	99002250
●	RT	Rot	Red	99002249
●	BL	Blau	Blue	99002246
●	GE	Gelb	Yellow	99002247
●	GN	Grün	Green	99002248