



## KURZ 14-4 IG MB


### Connecting plug

4 mm

30 V<sub>AC</sub> / 60 V<sub>DC</sub>

12 A

- moulded insulation
- with rear socket Ø 4 mm

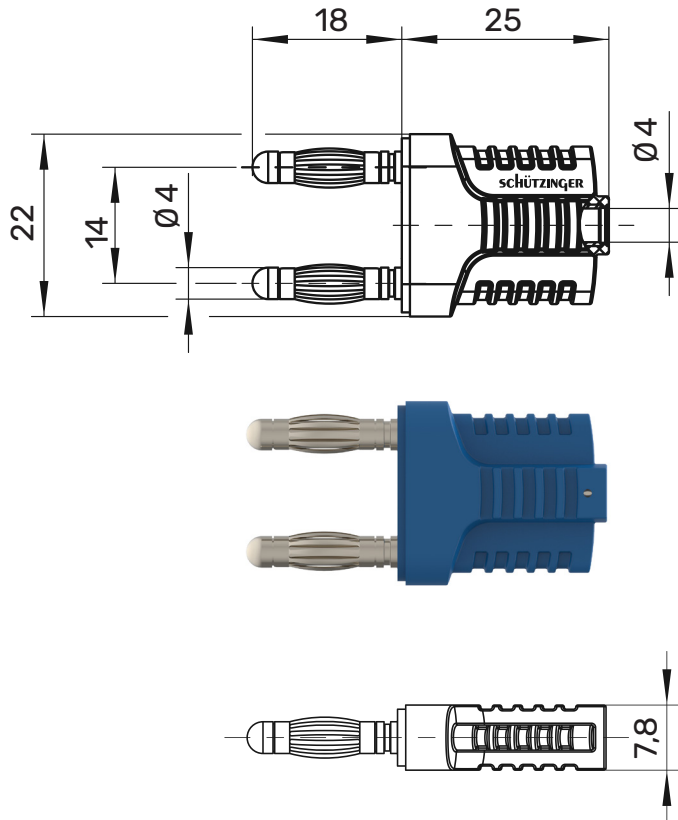

#### General information

Order No. <sup>1)</sup>	KURZ 14-4 IG MB Ni ...(colour)
colours	black, red, blue, yellow, green, white
contact parts	nickel-plated
insulation	PA6.6 (UL94-V2)

#### Technical data

terminal	rear socket
transition resistance	3 mΩ (Ni)
rated voltage <sup>2)</sup>	30 V <sub>AC</sub> / 60 V <sub>DC</sub>
rated current <sup>2)</sup>	12 A
operating temperature	from -25 °C to +80 °C

<sup>1)</sup> other contact platings and colours on request  
<sup>2)</sup> at normal ambient temperatures

**KURZ 14 - 4 IG MB**

Ni

●	<b>SW</b>	<b>Schwarz</b>	<b>Black</b>	99002330
●	<b>RT</b>	<b>Rot</b>	<b>Red</b>	99002329
●	<b>BL</b>	<b>Blau</b>	<b>Blue</b>	
●	<b>GE</b>	<b>Gelb</b>	<b>Yellow</b>	
●	<b>GN</b>	<b>Grün</b>	<b>Green</b>	
○	<b>WS</b>	<b>Weiß</b>	<b>White</b>	99002331