



## PZA 7524


### Test clamp

Ø 4mm

30 V<sub>AC</sub> / 60 V<sub>DC</sub>

32 A

- connection through safety threaded socket (SEB)
- maximum opening 25 mm

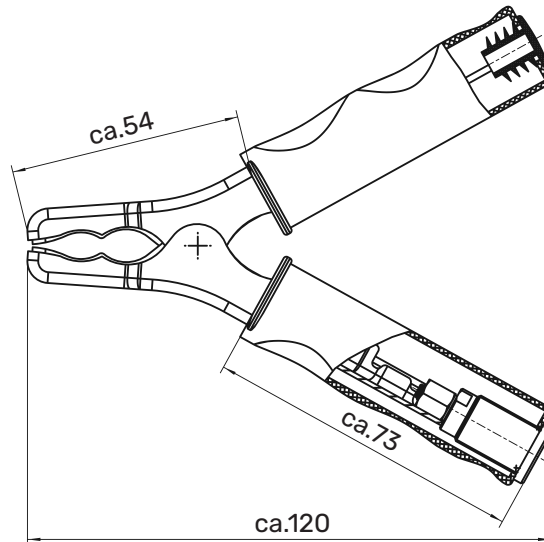

### General information

Order No.<sup>1)</sup> **PZA 7524**

colours black, red

contact parts socket nickel-plated,  
clamp zinc-plated

### Technical data

terminal Safety socket Ø 4 mm

transition resistance 3 mΩ

Bemessungsspannung<sup>2)</sup> 30 V<sub>AC</sub> / 60 V<sub>DC</sub>

rated current<sup>2)</sup> 32 A

operating temperature from -10 °C to +70 °C

<sup>1)</sup> other contact platings and colours on request  
<sup>2)</sup> at normal ambient temperatures

## **PZA 7524**

---

	<b>SW</b>	<b>Schwarz</b>	<b>Black</b>	<b>99015388</b>
	<b>RT</b>	<b>Rot</b>	<b>Red</b>	<b>99015389</b>

---