



## SAK 9230

### Safety crocodile clip





Ø 4 mm safety

1000 V CAT III

600 V CAT IV

32 A

- innovative spring technology without torsion spring: the exceptional spring technology ensures reliable and long-lasting operation
- optimal ergonomics and haptics: enables pleasant and comfortable handling and fits comfortably in the hand
- the plastic parts are composed of UL-listed material
- widest possible opening: clamping range up to 34 mm
- reliable holding force, even with long measuring distances
- due to crocodile jaw technology, even the finest wires can be picked off
- Ø 4 mm plug connection to accept Ø 4 mm safety plugs
- insulated for safe use
- for a professional use of our products, the safety instructions in our catalogue must be observed

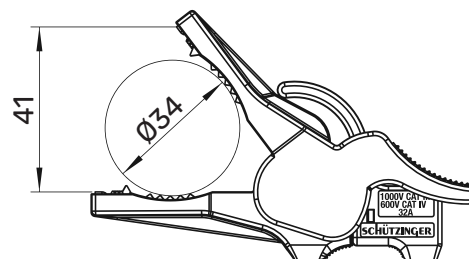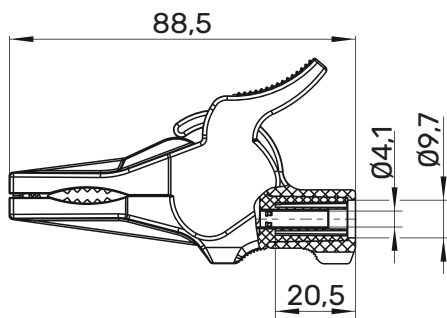

#### General information

Order No. <sup>1)</sup>	<b>SAK 9230 Ni</b>
colour	black, red, blue, yellow, green, greenyellow
contact parts	nickel-plated
insulation	PA 6.6 (UL94-V2)

#### Technical data


terminal	safety socket
rated voltage <sup>2)</sup>	1000 V CAT III / 600 V CAT IV
rated current <sup>2)</sup>	32 A
operating temperature	from -25 °C to +80 °C

<sup>1)</sup> other colours on request

<sup>2)</sup> at normal ambient temperatures

**SAK 9230**

Ni

 <b>SW</b>	<b>Schwarz</b>	<b>Black</b>	99022576
 <b>RT</b>	<b>Rot</b>	<b>Red</b>	99022577
 <b>BL</b>	<b>Blau</b>	<b>Blue</b>	99022715
 <b>GE</b>	<b>Gelb</b>	<b>Yellow</b>	99022716
 <b>GN</b>	<b>Grün</b>	<b>Green</b>	99022717
 <b>GNGE</b>	<b>Grüngelb</b>	<b>Green-yellow</b>	99022718